


Features

- Acrylic
- Textured bottom surface
- 5 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- Drop-in or three-wall alcove
- Optional K-9695 metal finish 5 jet trim kit
- Optional K-1278 removable apron
- 60" (1524 mm) x 36" (914 mm) x 20" (508 mm)

CUSTOM BATH WHIRLPOOL WITH HEATER K-1239-HB

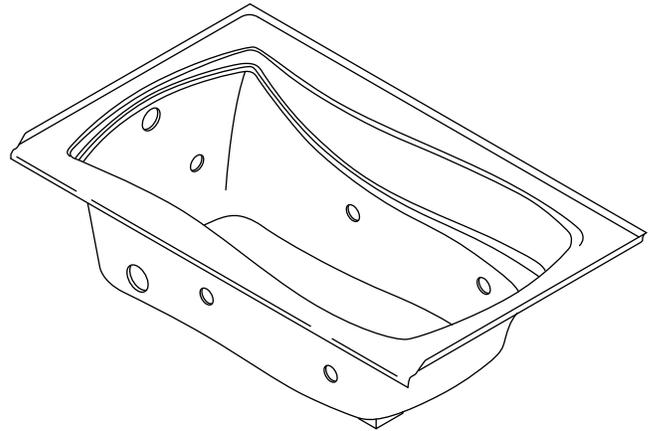

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- ASTM E162
- ASTM E662
- CSA B45.5/IAPMO Z124

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1239-HB	Custom bath whirlpool with heater	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories			
K-7213	Clearflo bath cable drain with PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7214	Clearflo bath cable drain without PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7161-AF	Clearflo bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other _____

Optional Accessories			
K-1278	Removable apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-9695	Metal finish 5 jet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

Product Specification

The acrylic custom bath whirlpool shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Product shall have 5 individually adjustable Proflex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall have a textured bottom surface. Product shall be for drop-in or three-wall alcove installation. Product shall be available with an optional K-1278 removable apron and an optional K-9695 metal finish 5 jet trim kit. Bath whirlpool shall be Kohler Model K-1239-HB-_____.

MARIPOSA® 5'

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	46" (1168 mm) x 24" (610 mm)
Basin area, top	54" (1372 mm) x 27" (686 mm)
Weight	110 lbs (49.9 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	63 gal (238.5 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	58" (1473 mm) x 34" (864 mm)
-----------------	------------------------------

Pump:	V	Hz	A
1-speed	120	60	7.5
Heater:	1.5 kW	120	60
			12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (214 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. If installing a spout on the faucet deck, consult local and national codes for minimum air gap requirements.

The apron must be installed before the finished floor and wall materials are installed.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

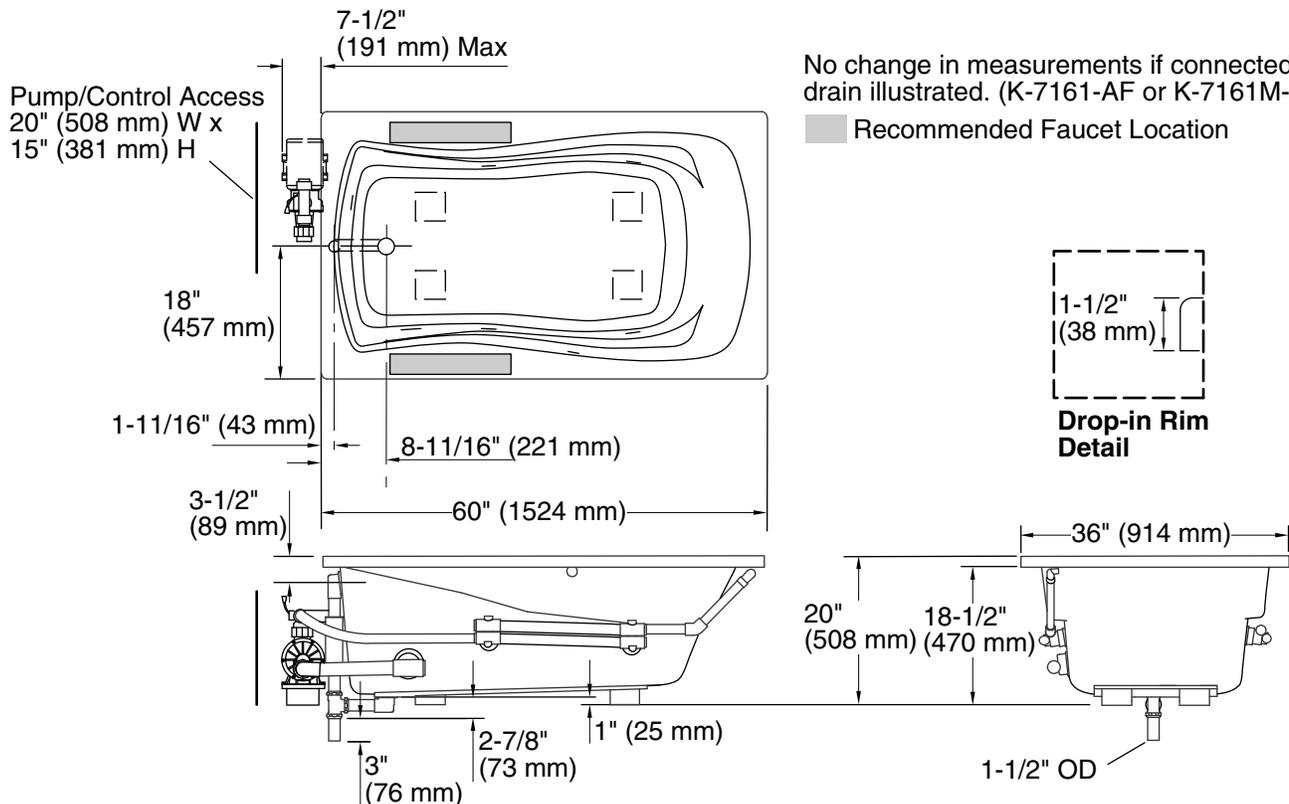

Product Diagram