KOHLER®

Technology

- Frameless, 1/4-inch-thick Crystal Clear tempered glass.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides quiet sliding action.
- Vertical blade handles accentuate the contemporary style.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.

Installation

- Sliding bath door.
- Not for use in hospitality.

Included Components

Additional Components:
   Hardware kit

Codes/Standards

CPSC 16CFR 1201
ANSI Z97.1

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

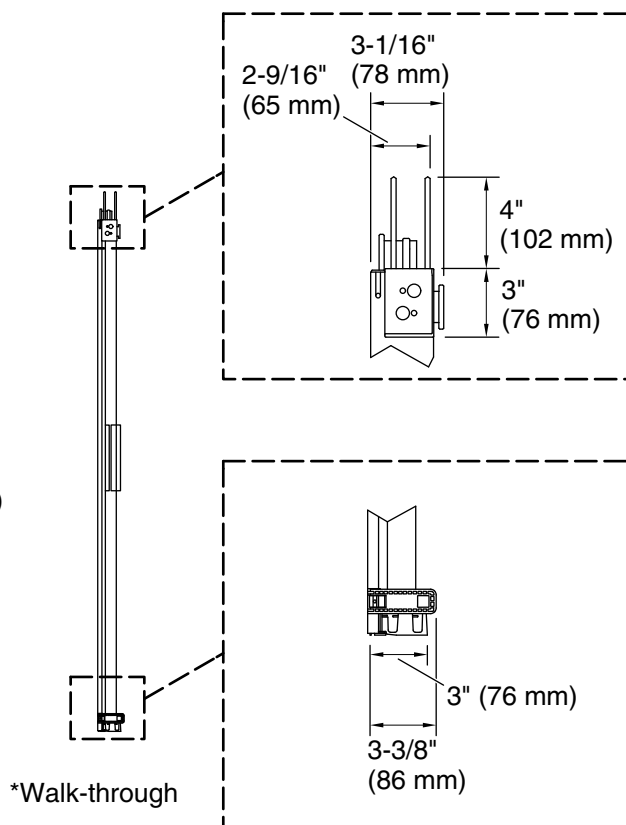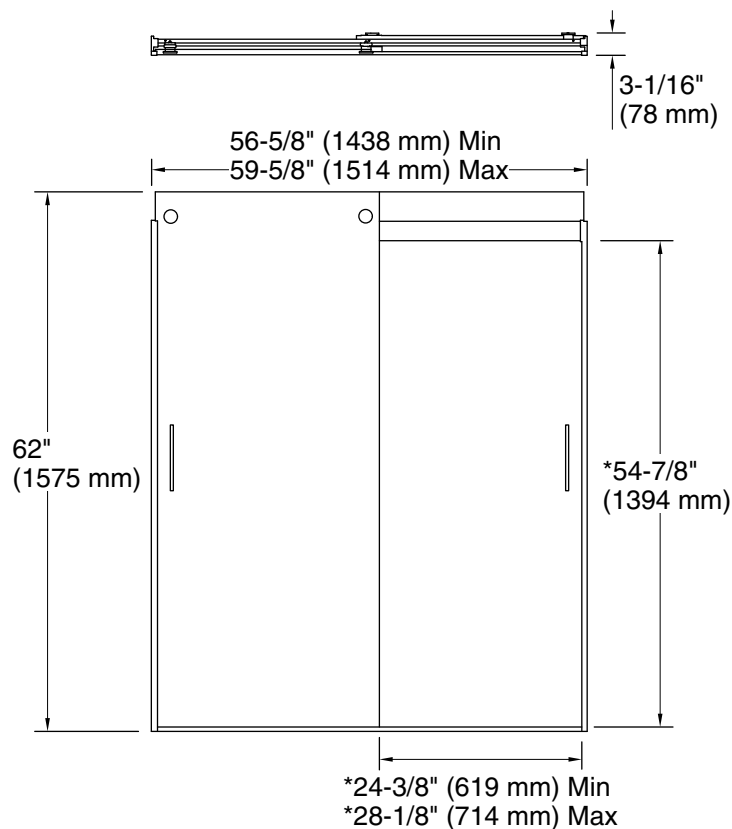| Color	Code	Description
	SH	
	MX	
	ABV	
	ABZ	

Available Glass Options

Code	Description
L	Crystal Clear

THE BOLD LOOK OF KOHLER®

3-1/16"
(78 mm)

56-5/8" (1438 mm) Min
59-5/8" (1514 mm) Max

62"
(1575 mm)

*54-7/8"
(1394 mm)

*24-3/8" (619 mm) Min
*28-1/8" (714 mm) Max

3-1/16"
(78 mm)
2-9/16"
(65 mm)

4"
(102 mm)

3"
(76 mm)

3" (76 mm)

3-3/8"
(86 mm)

*Walk-through

Technical Information

All product dimensions are nominal.

Installation type:	For bath installation
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-3/8" (619 mm)
Walk-through - Max:	27-3/8" (695 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 64-1/2" (1638 mm) to allow for installation clearance.

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
11-11-2019 05:54 - US/CA/MX

THE BOLD LOOK
OF KOHLER®