


HARDWARE LIST


Ax1




Bx1

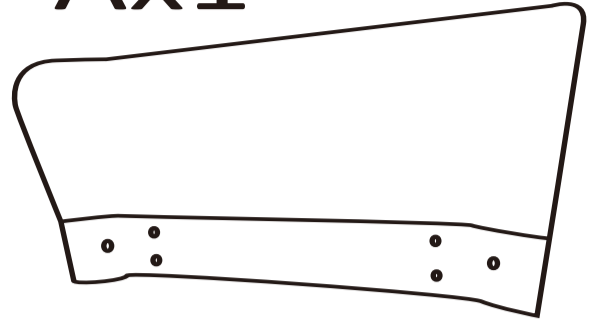

Cx4

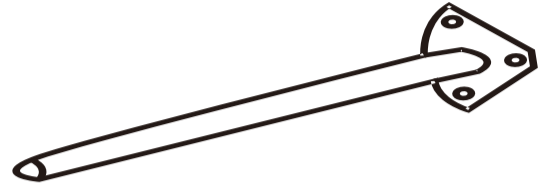


Dx6
M8x55mm




Ex12
M6x20mm



Fx6



Gx6




Hx1 M6




Be sure to check all packing material carefully for small parts, which may have come loose inside the carton during shipment.


ASSEMBLY INSTRUCTIONS

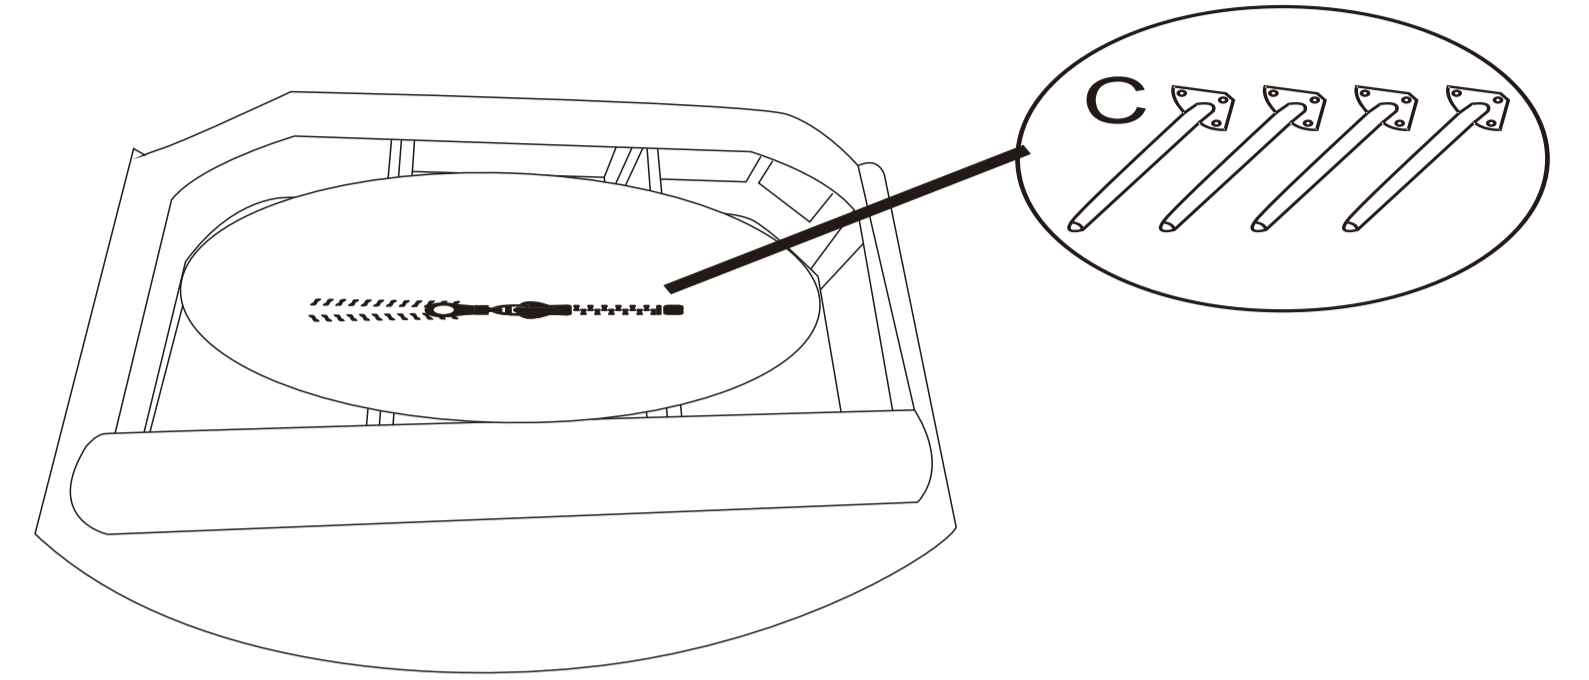


STEP 1: Place seat B on clean padded surface. Open the zipper pocket under seat and take legs C and hardware pack out.

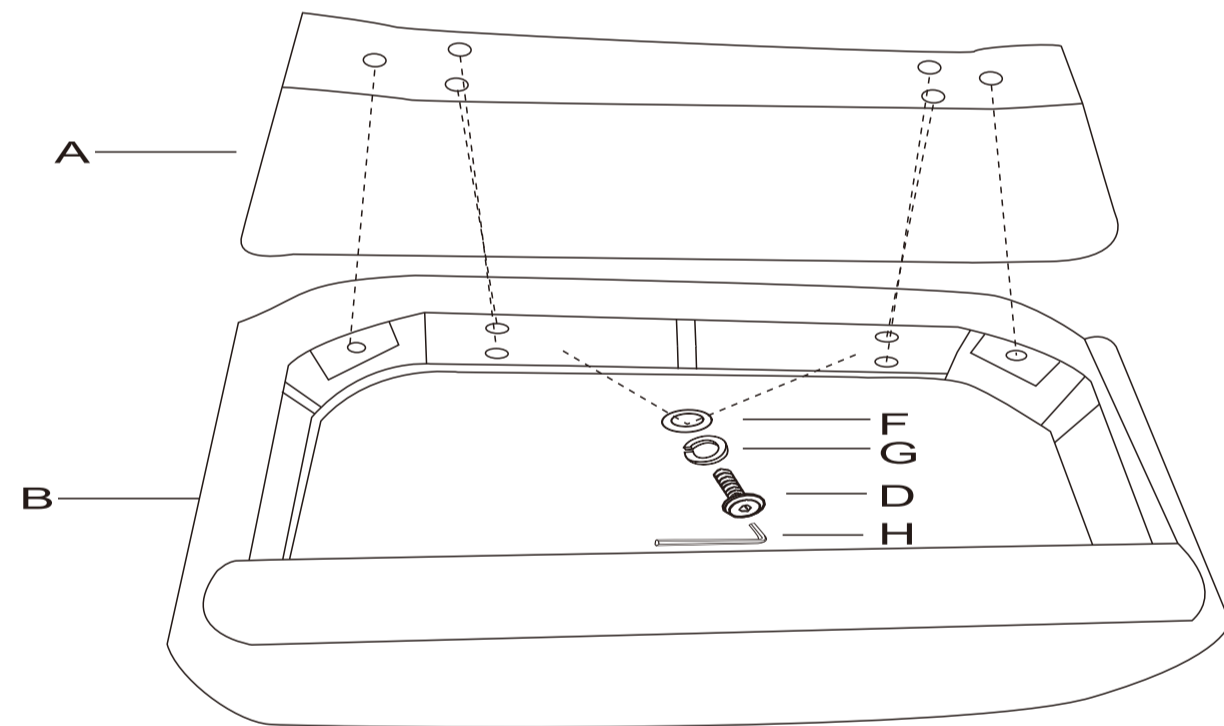

STEP 2: Align hole position on seat cushion B and back A, use bolt D, flat washer F, spring washer G, allen wrench H to connect seat and back, make sure bottom edge of back align with rear bottom edge of seat then fasten all bolts to secure.

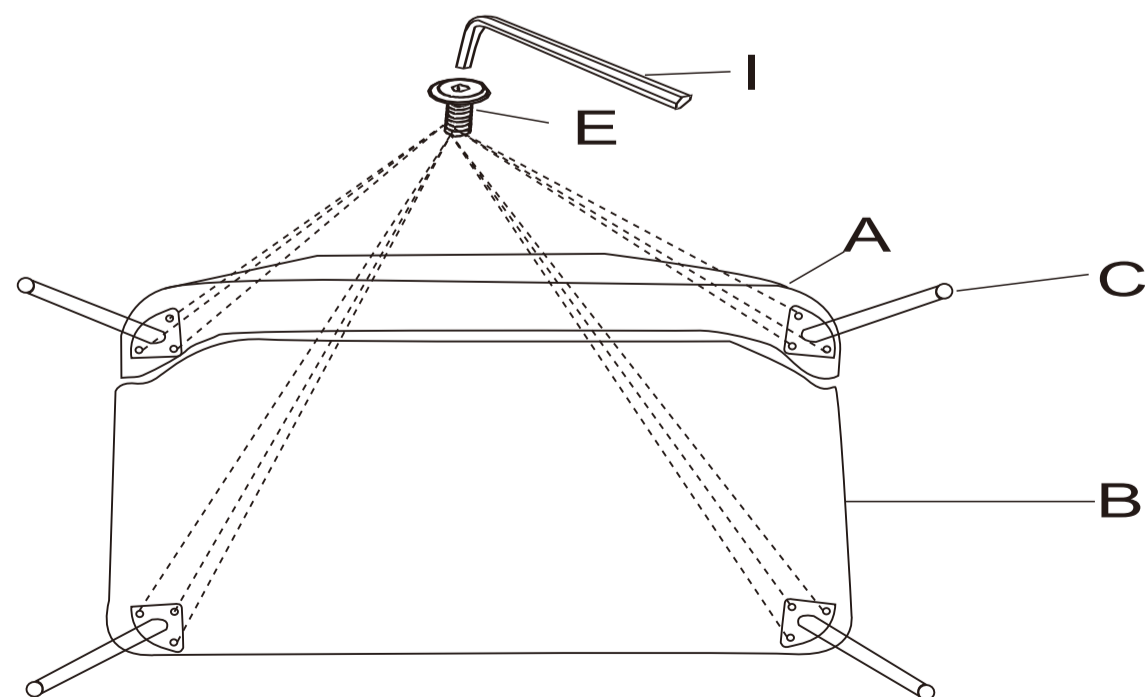

STEP 3 : Use bolt E , allen key I to attach legs C to bottom of the seat, fasten all bolts to secure.

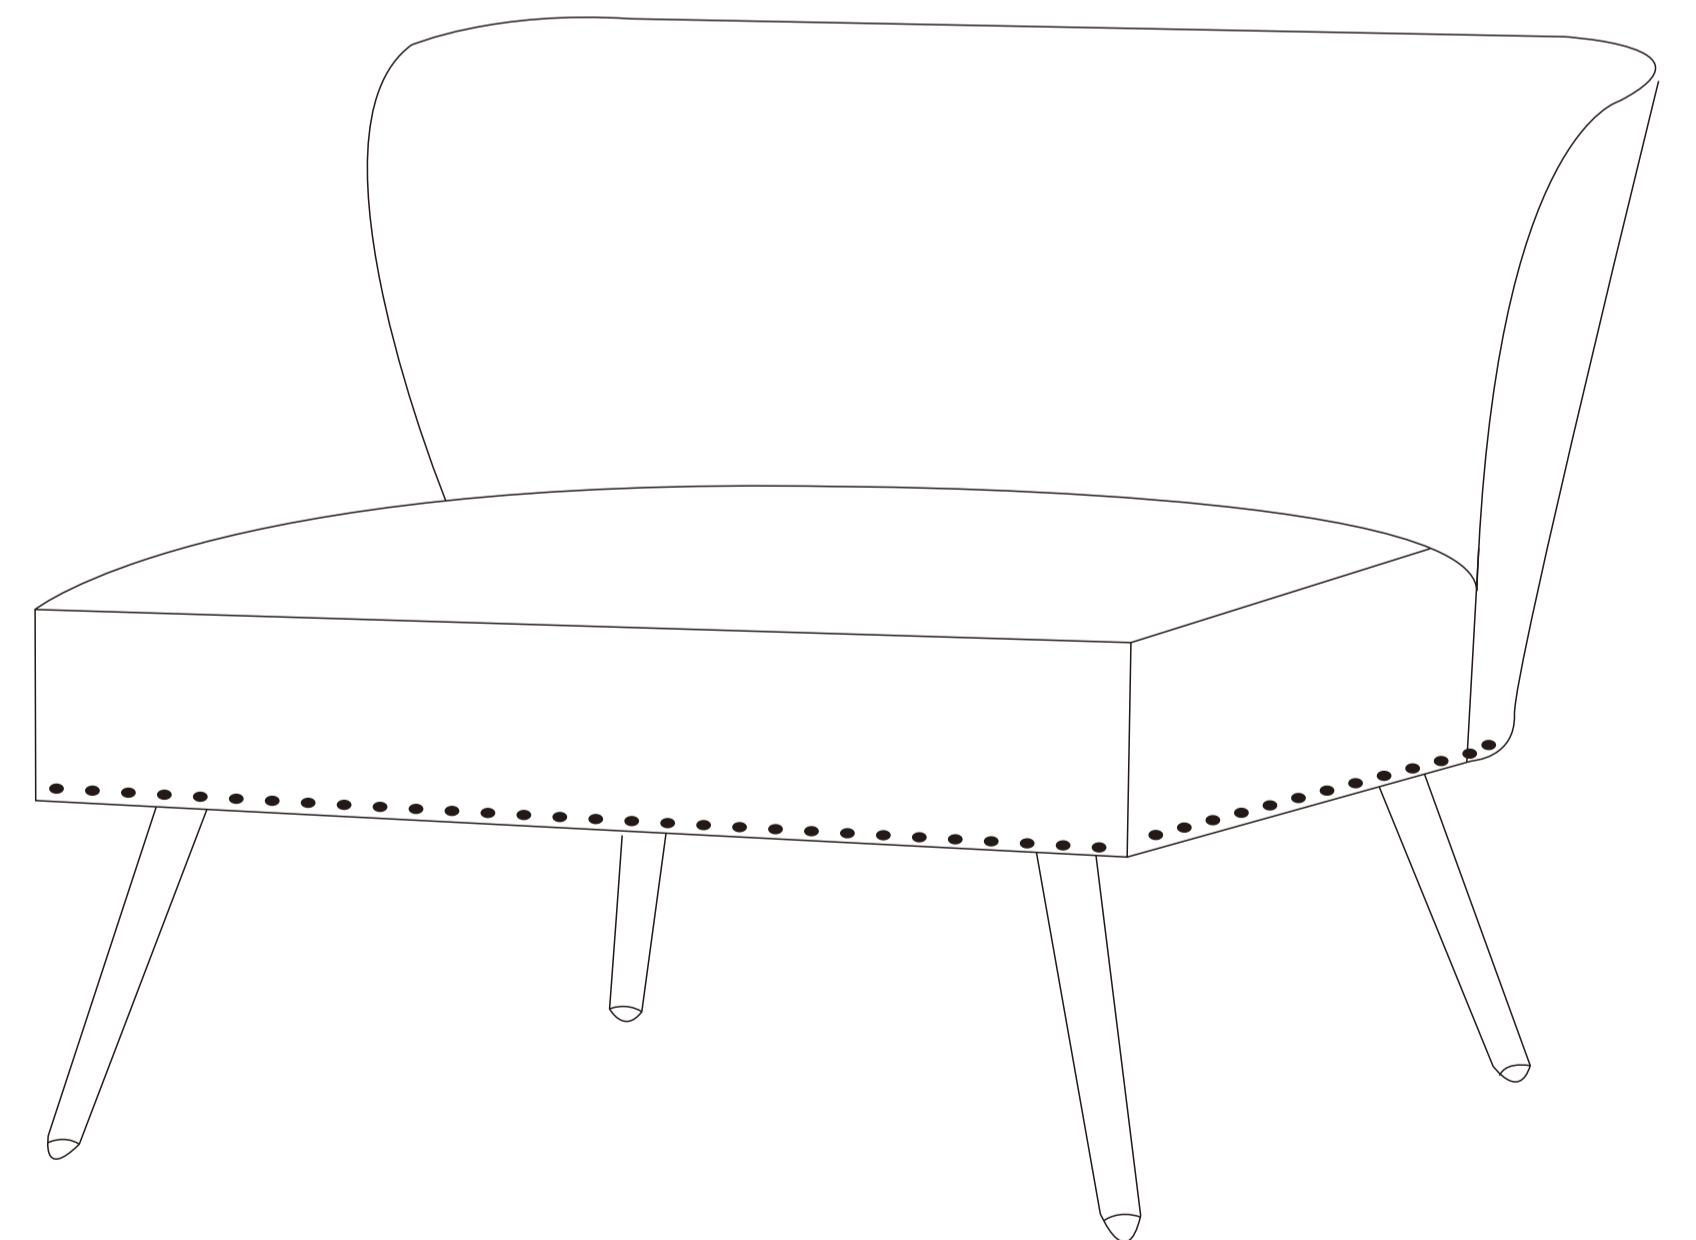

Adjust levelers under legs to set the seat level.

STEP 4 :Assembly completed.