


70-010

SERENITY Foam Underlayment

For wood subfloors. Can also be used with concrete slabs with our polyethylene MoistureBarricade.


COMFORT

3/32" polyethylene foam underlayment for laminate and engineered wood flooring




QUALITY

Ideal for above grade uses

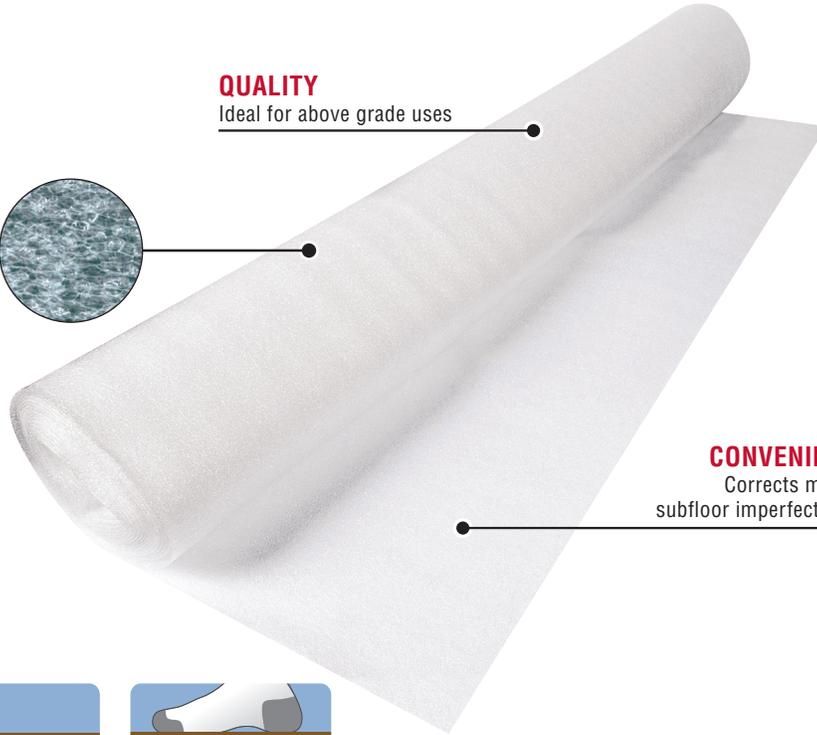


CONVENIENT


Corrects minor subfloor imperfections



Radiant Heat



Levels Imperfections



Cushions Flooring

made in
USA

Our Serenity underlayment is an ideal underlayment for above grade installations of laminate and engineered wood flooring over wood subfloors. It can also be used over concrete slabs with our polyethylene MoistureBarricade.

This product levels minor subfloor imperfections and also provides cushioning.

SPECIFICATIONS

ITEM CODE	70-010	70-010-XL
UNIT OF MEASURE	60 rolls per case	1 each
COVERAGE	100 sq ft per roll 6000 sq ft per case	400 sq ft per case
WIDTH OF ROLL	48"	48"
LENGTH OF ROLL	25 ft (300")	100 ft (1200")
THICKNESS	3/32"	3/32"
WEIGHT PER ROLL	1 lbs.	4 lbs.
DIAMETER OF ROLL	6.5"	13"

Quality & Excellence Since 1938.

www.ROBERTSCONSOLIDATED.com

U.S. Headquarters
866 435 8665

Canada
800 840 9422

Europe/Middle East
0031 24 6485348

Australia
011 61 3 9797 1888

New Zealand
64 9 415 9700