



## ASSEMBLY INSTRUCTIONS Model 98-B0100/E26 Pendant

**CAUTION:** A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS FIXTURE IN ACCORDANCE WITH ALL APPLICABLE LOCAL CODES AND WITH FULL KNOWLEDGE OF THE HAZARDS INVOLVED.

**WARNING:** THE ELECTRICITY MUST BE DISCONNECTED AT THE MAIN FUSE BOX OR CIRCUIT BREAKER PANEL BEFORE INSTALLATION OF THIS PENDANT – TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK. THIS PENDANT IS NOT DESIGNED TO SUPPORT EXTERNAL WEIGHT OTHER THAN THE LAMP SHADE THAT IT IS PROVIDED WITH.

**Note:**

1. This pendant is constructed using 3-conductor electrical wire. The gold thread indicates the ground wire.

### Assembly Instructions

1. Insert pendant's electrical wire through the glass shade as shown in figure 1.
2. Silicon washer protects the glass shade.
3. Slide fixture cup down the wire and tighten to socket assembly. (figure 2)
4. See instructions included with canopy for electrical wiring and mounting information.
5. Use Max 60W medium base lamp.



FIGURE 1

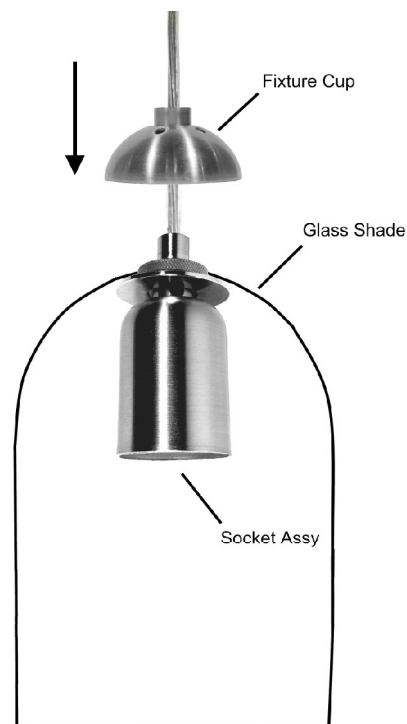


FIGURE 2