

ASSEMBLY INSTRUCTIONS



CAUTION

- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- ◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder




**Safety
glasses**



**Phillips
screwdriver**


PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

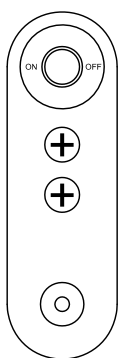

REMOTE CONTROL





**LOW-VOLTAGE—5V
BULB**

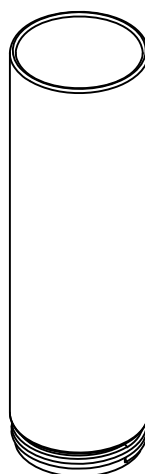

GLASS SHADE

MOUNTING PLATE

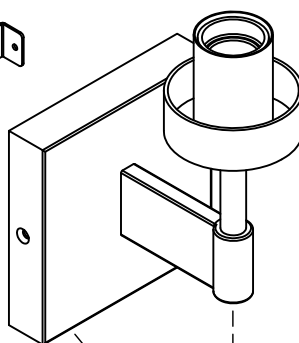


SCREW


LAMP BODY

TUBE

PART BAG




X2



X2




X2

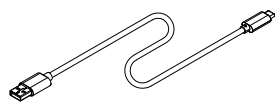

X1


Step 1a

Use the mounting screws to attach the mounting plate to the junction box(not included).

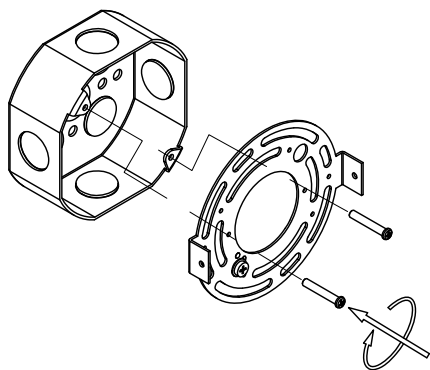


Step 1b

Use the mounting screws to attach the mounting plate to the junction box(not included).

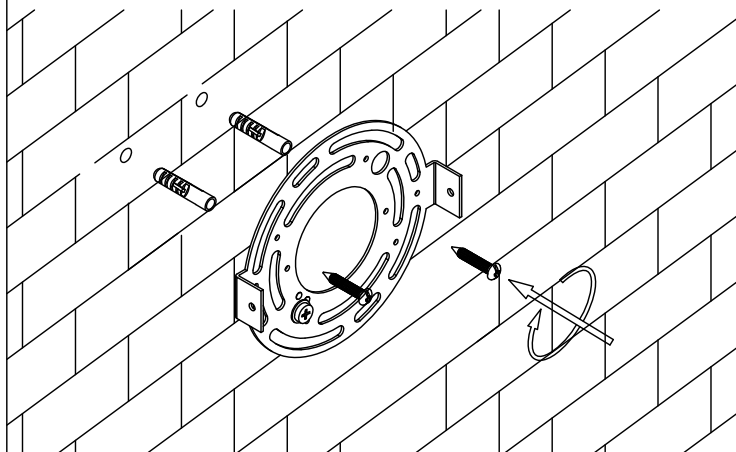


Step 2

Attach the lamp body to the mounting plate.

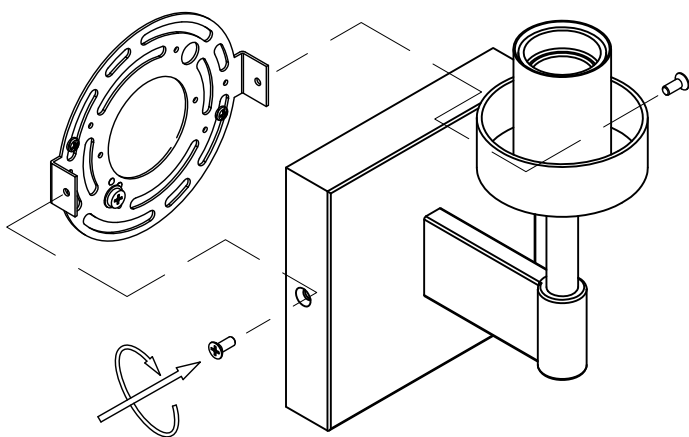


Step 4

choose the right bright

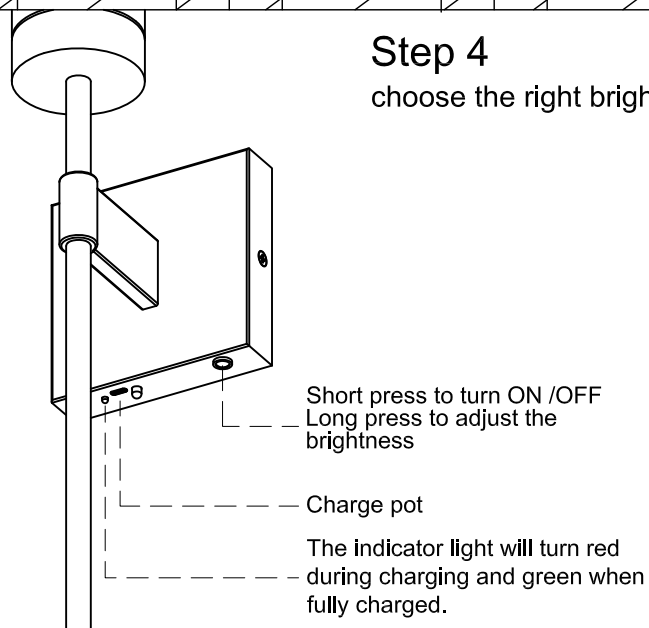

Step 3

a. Install the tube
b. Install the bulb(included,only low-voltage—5V bulbs can be used)
c. Install the glass shade

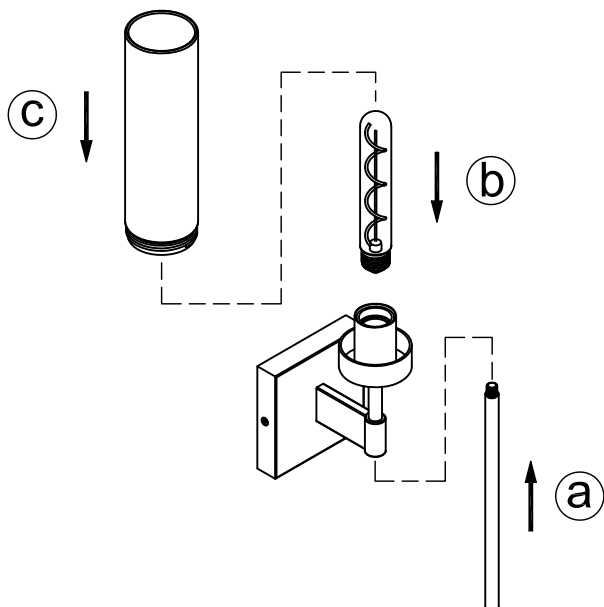

SCONCE

