


Installation instructions

Pantry and Workboard Faucets

unit:inch (mm)

2319500C

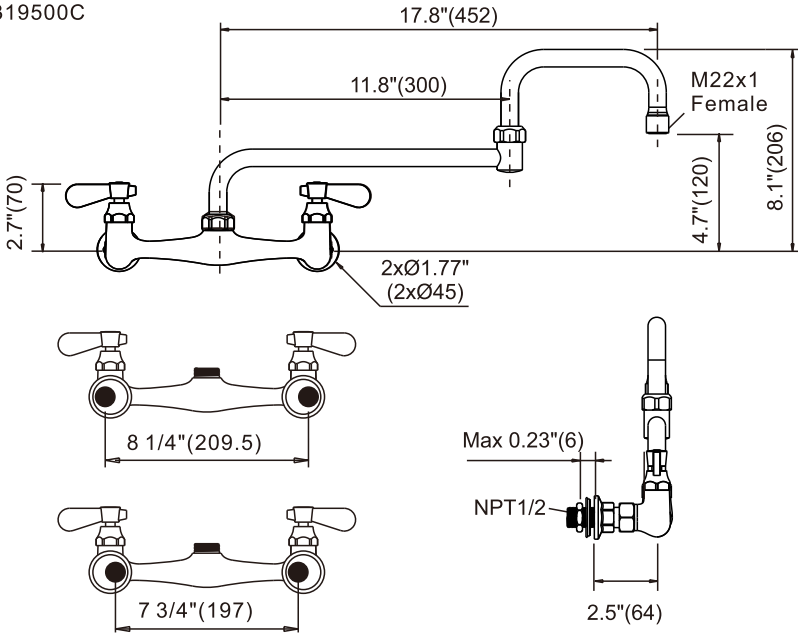


Attach supply lines (not included).

8 inches adjustable center hole distance,

Deck-mount faucet using a pair of G1/2" female inlets with 2" flanges.

those inlets can adjust from 7 3/4" (197mm) to 8 1/4" (209.5),


allowing you to fit them directly onto your facility's water lines with ease.

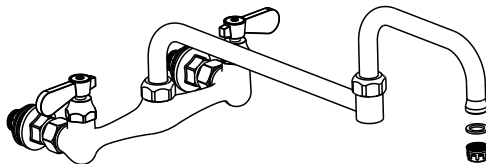

With 1.8 gpm are compliant with California water efficiency regulations,
Complies with California Proposition 65 and with the Federal Safe Drinking Water Act.

In areas with extremely low water pressure causing the faucet water flow to be unsatisfactory, replace the 2.2 gpm aerator to improve the water flow in the faucet.

1

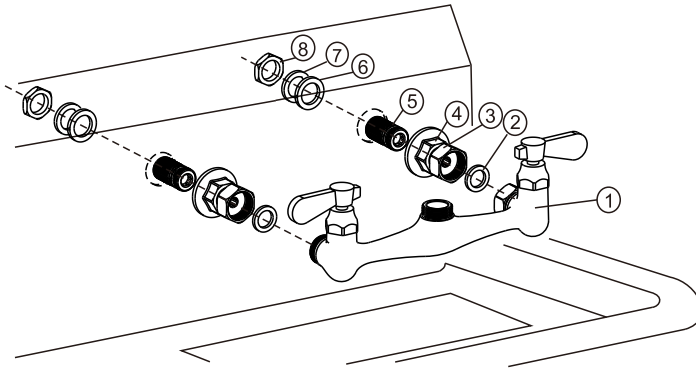

1. Connect the two flanges (3) into the two inlets (5) . Screw them tightly.

2. Connect the body (1) to the flanges (3), do remember the gaskets (2) inside.

The two flanges (3) are adjustable inlets.


Unscrew the hexagon nut (4) on the flange (3) , rotate the flange(3) to the right the distance and screw the hexagon thread back tightly.

You can adjust the distance from 7 3/4" to 8 1/4" .

3. Turn out the hexagon (6) with the washer(6) and the metal plate(7),


Use the hexagon nut to lock the faucet and sink.

2

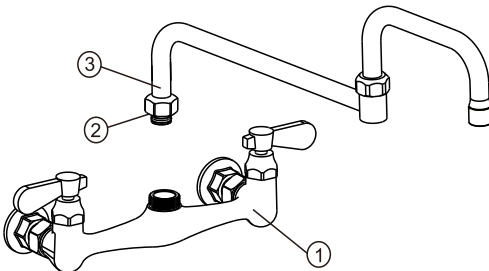

Put the swing nozzle (3) into the body (1), screw the nut (2).

3

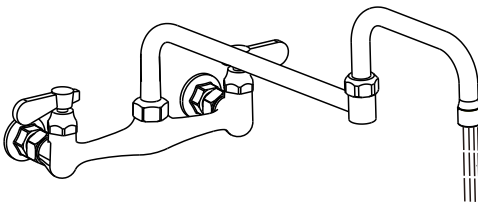

FLUSH SYSTEM/CHECK FOR LEAKS.

Turn on hot and cold water supplies and flush water lines for one minute.

Check all connections at arrows for leaks.

Retighten if necessary, but do not overtighten.