




Installation Instructions

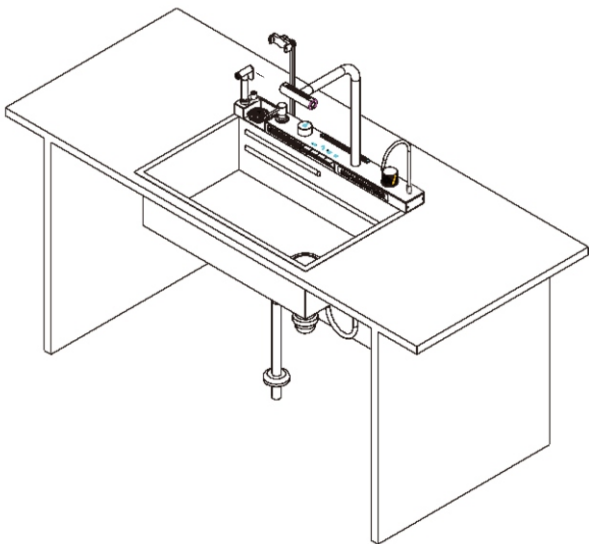


Step One




Step Two

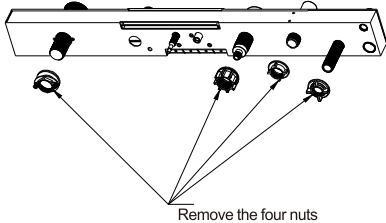


Step Three

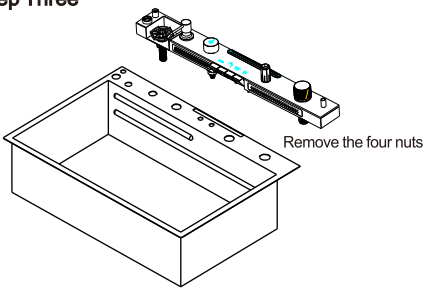


Step Four

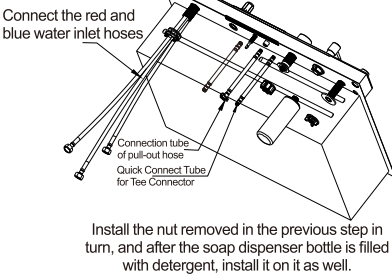


Step Five

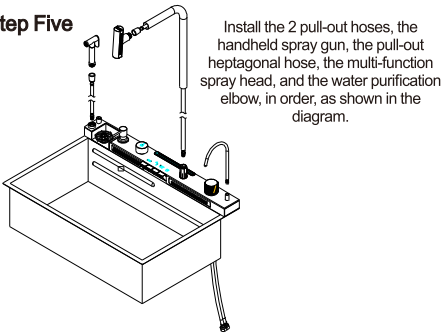


Step Six

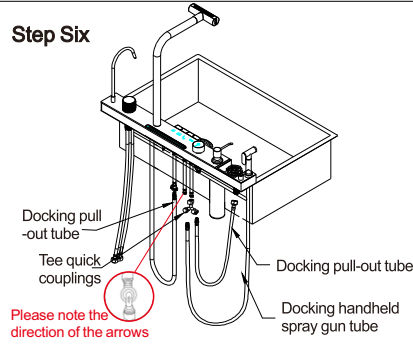


Step Eight

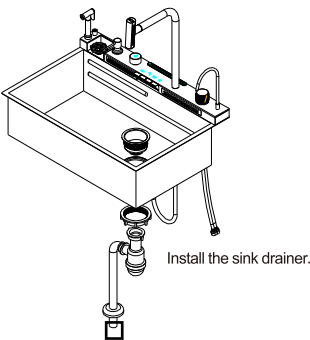

Step Nine

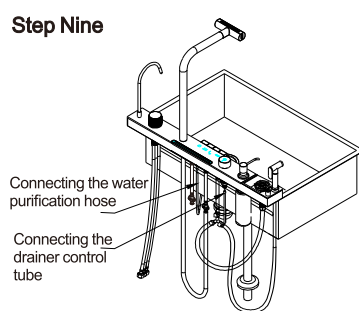


Faucet Fittings

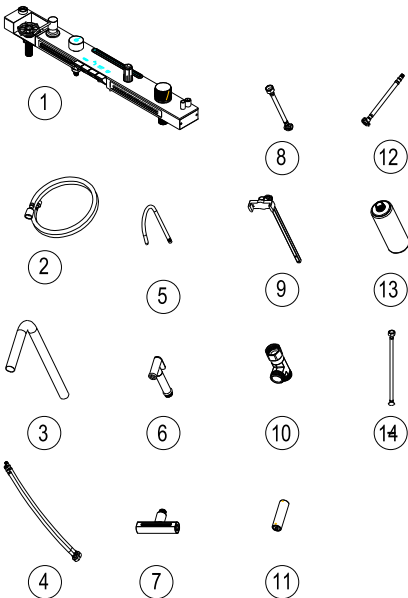


14	Double nut connection hose	1
13	Soap dispenser bottle	1
12	Connection tube of pull-out hose	1
11	AA battery	4
10	Tee Connector	1
9	Mobile phone holder	1
8	Handheld spray gun connection tube	1
7	Multifunctional spray head	1
6	Handheld spray gun	1
5	Purified faucet tube	1
4	Red and blue water inlet pipes	2
3	Heptagonal faucet shell	1
2	Pull-out hose	2
1	Waterfall kitchen faucet	1
NO.	Item name	Amount


Step Ten

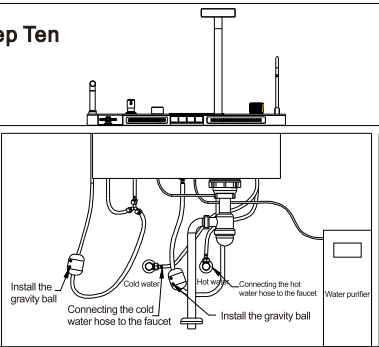

Step Eleven

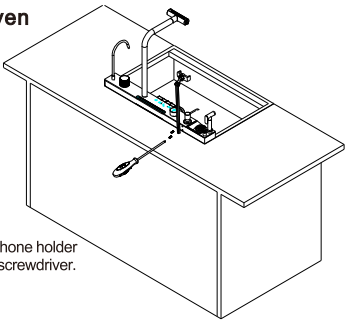

Usage

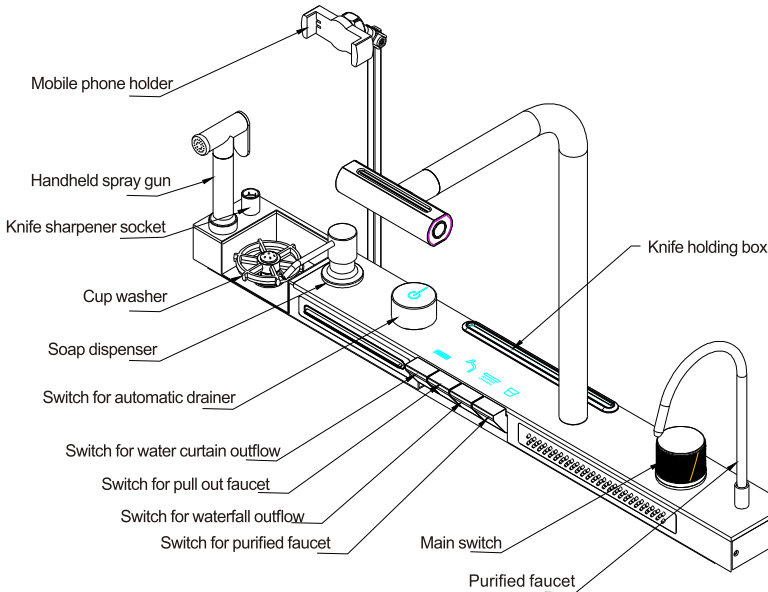

Precautions after installation

- ☆ After the installation is completed, please check the sealing condition of each connection, and there should be no leakage in each place.
- ☆ Using conditions: the working water pressure of the faucet is 0.05-1.0MPa (including cold water and hot water pressure), applicable water temperature: 4-90 °C
- ☆ Faucet and hot and cold water supply pipe must be connected correctly, that is, facing the front of the faucet, the left side to connect the hot water, the right side to connect the cold water;
- ☆ After installation, the braided hose must not kink.

Cleaning care

- In order to maintain the faucet's shiny appearance and good performance, please take care of the faucet as follows:
1. Rinse with water only and dry with a soft cotton cloth;
 2. Mild liquids and colorless glass cleaners can be used to remove surface dirt and film, as well as non-abrasive brightening agents;
 3. Never use abrasive cleaners, polishes, emery cloths, paper towels or squeegees;
 4. Do not use acidic cleaners, insoluble granular cleaners, soaps, etc.
 5. During usage, the bubblers may accumulate dirt and slow down the flow of water. Simply unscrew the bubbler, rinse the bubbler with water and install it back in place.

