



Awaken® B110 | K-72421-G

Four-function handshower, 1.75 gpm

Features

- Handshower features transitional design, inspired by nature
- Three spray functions and ADA-compliant nonpositive shutoff
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- Spray nozzles cover full area of sprayhead
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) flow rate.
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 16:12 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

IMPORTANT: Product meets the Americans with Disability Act (ADA) and ICC A117.1 (specifically section 608.5) if installed properly with an adapter that enables a non-positive shut off. Please see the KOHLER Statement® ADA handshower hose adapter in the recommended products section.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC

Required Products/Accessories

- K-8593 72" metal shower hose
- or
- K-9514 60" metal shower hose
- or
- K-45981 72" ribbon hose
- or
- K-45982 60" ribbon hose

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 1.75 gpm (6.6 l/min)

Flow:


Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner



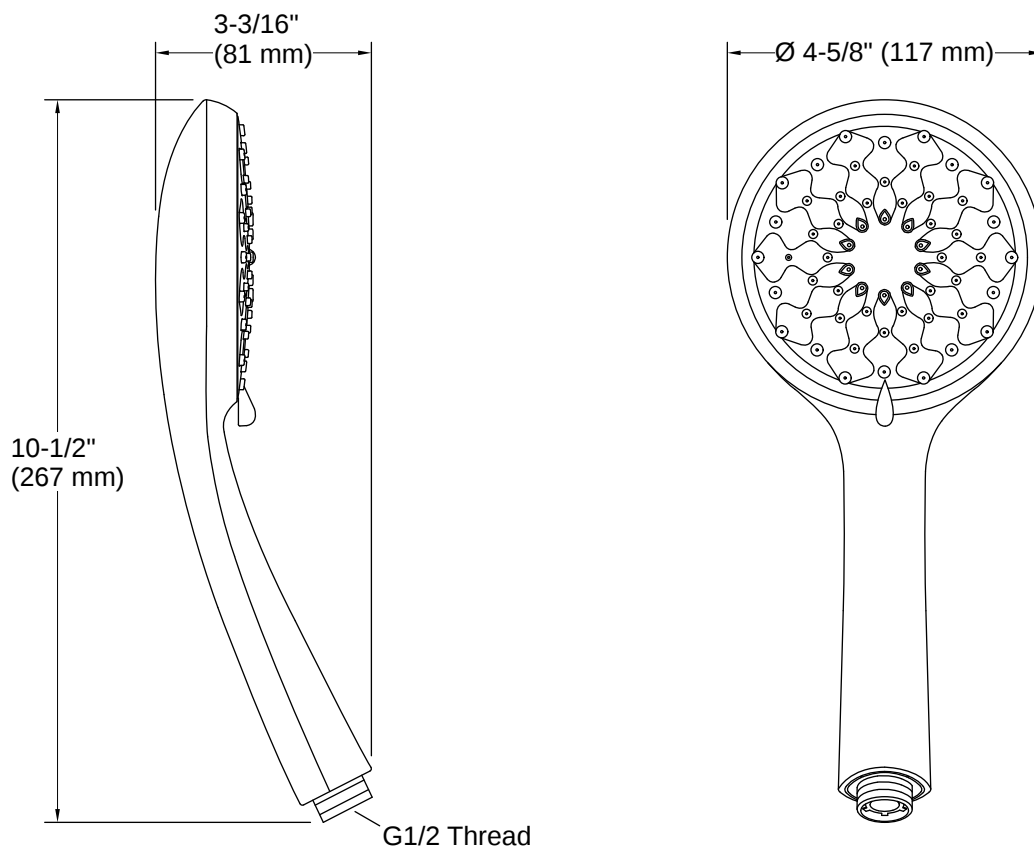

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-06-2026 16:12 - US-CA