

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: JK4088-4

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


### NOTES:

1. Before installing,consult local electrical codes for wiring and grounding requirements.
- 2.Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

## CEILING LIGHT

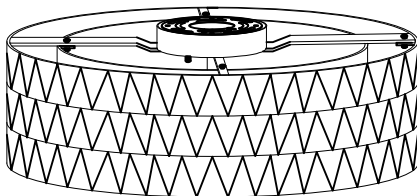

### TOOLS REQUIRED

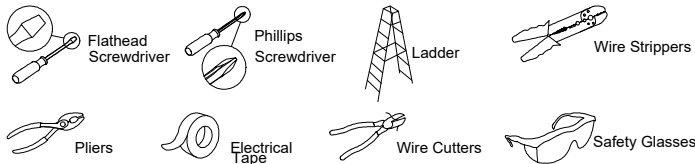

### PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.





## PART LIST AND HARDWARE LIST

| PIECE | DESCRIPTION          | QUANTITY |
|-------|----------------------|----------|
| A     | Mounting bracket     | 1        |
| B     | Straight edge plate  | 1        |
| C     | mounting plate screw | 2        |
| D     | junction box         | 0        |
| E     | Wire nut             | 3        |
| F     | Use screws           | 2        |

| PIECE | DESCRIPTION    | QUANTITY |
|-------|----------------|----------|
| G     | Lampshade      | 1        |
| H     | Bulb           | 0        |
| I     | Diffuser Plate | 1        |
|       |                |          |
|       |                |          |
|       |                |          |
|       |                |          |

## INSTALLATION

- 1.Secure the mounting bracket (A) to the junction box (D) with screws (F).
2. Connect the grounding wire of the power circuit (green or bare copper wire) to the grounding (white). wire of the fixing device, with the black end connected to (black) and the white end connected to
- 3.Mount the straight edge plate (B) to the mounting plate (A) with mounting plate screws (C).
4. Screw on the light bulb (I).  
Light source not included
5. Bend the diffuser Plate(I) as shown in Figure (2-1) below. Fit the diffuser into the Lampshade(G), starting with one half and then feeding the other.Press with your hand,until the diffuser Plate firmly sits on the shade's inner roll rim, Complete as shown in Figure (2-2) below.

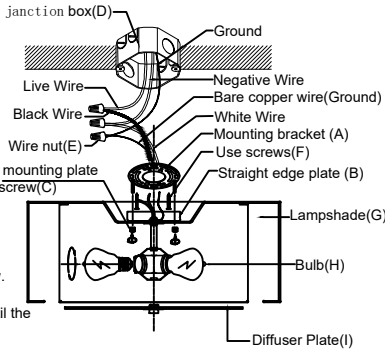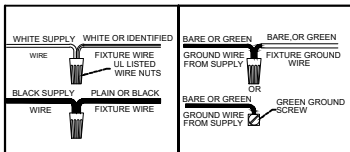

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: JK4088-5

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


### NOTES:

1. Before installing,consult local electrical codes for wiring and grounding requirements.
- 2.Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

## CEILING LIGHT

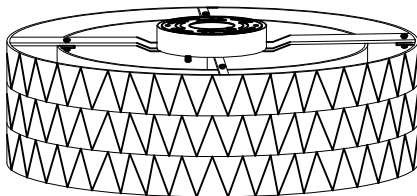

### TOOLS REQUIRED

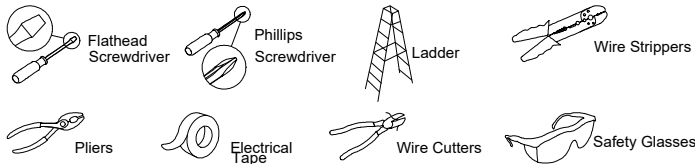

### PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.




## PART LIST AND HARDWARE LIST

| PIECE | DESCRIPTION          | QUANTITY |
|-------|----------------------|----------|
| A     | Mounting bracket     | 1        |
| B     | Straight edge plate  | 1        |
| C     | mounting plate screw | 2        |
| D     | junction box         | 0        |
| E     | Wire nut             | 3        |
| F     | Use screws           | 2        |

| PIECE | DESCRIPTION    | QUANTITY |
|-------|----------------|----------|
| G     | Lampshade      | 1        |
| H     | Bulb           | 0        |
| I     | Diffuser Plate | 1        |
|       |                |          |
|       |                |          |
|       |                |          |
|       |                |          |

## INSTALLATION

- 1.Secure the mounting bracket (A) to the junction box (D) with screws (F).
2. Connect the grounding wire of the power circuit (green or bare copper wire) to the grounding (white). wire of the fixing device, with the black end connected to (black) and the white end connected to (white).
- 3.Mount the straight edge plate (B) to the mounting plate (A) with mounting plate screws (C).
4. Screw on the light bulb (H).  
Light source not included
5. As shown in Figure (3-1) below, remove the nut.

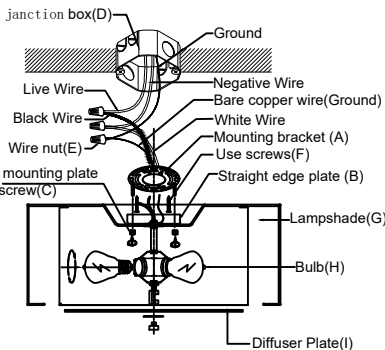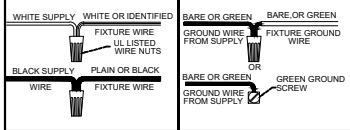

6. Bend the diffuser Plate(I) as shown in Figure (3-2) below. Fit the diffuser into the Lampshade(G), starting with one half and then feeding the other.Press with your hand,until the diffuser Plate firmly sits on the shade's inner roll rim, tighten the nut-b,Complete as shown in Figure (3-3) below.

