ASSEMBLY INSTRUCTIONS

CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker of by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder




Safety glassed




Phillips screwdriver

HARDWARE INCLIDED

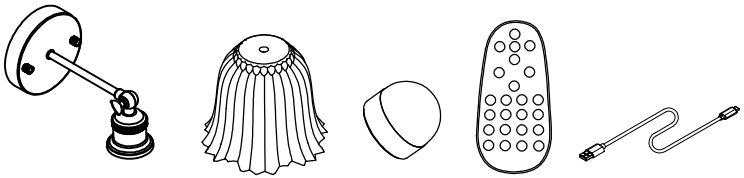

PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


MOUNTING OPTION for using attached bulb that comes with the product.

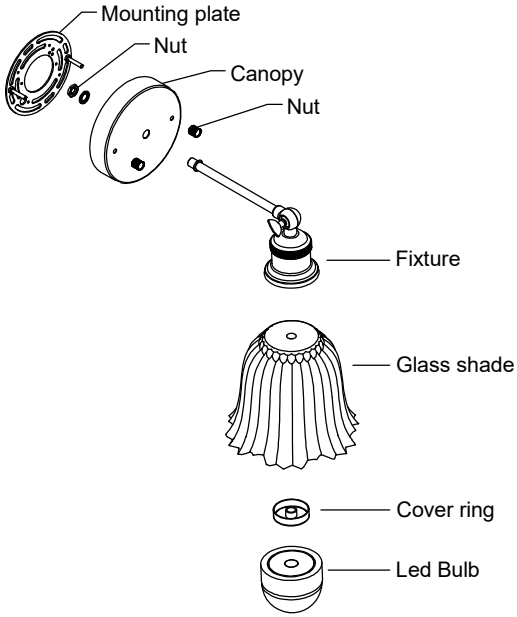

PART BAG



X1 X2 X2 X2

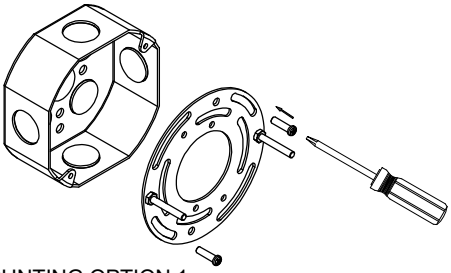


MOUNTING OPTION 1

(With junction box)

STEP 1a

Unscrew the ball nuts from the mounting unit.
Use the mounting screws to attach the mounting unit to the junction box (not included).

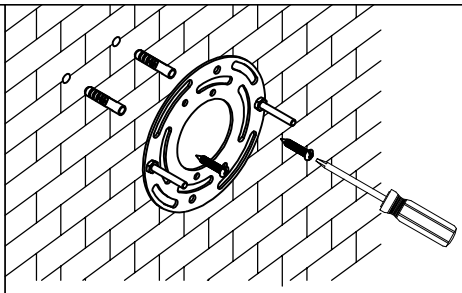

MOUNTING OPTION 2


(No junction box)

STEP 1b

If there is no junction box, you can also install the wall lamp directly by fixing the mounting plate on the wall.


STEP 2

Attach the Lamp arm to the canopy.

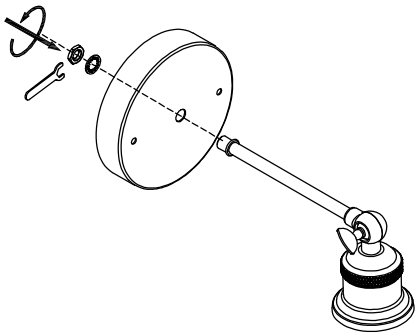


STEP3

Attach the fixture to the mounting unit through screw holes as shown, and secure it with nut.
Tighten the nut to secure it tightly to the wall.

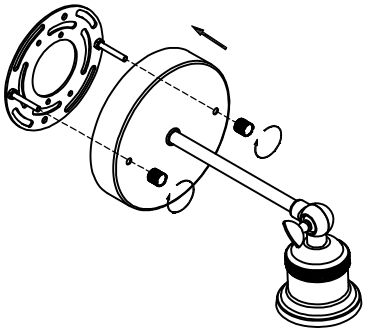

STEP 4

Remove the socket ring from the fixture.
attach the glass shade onto fixture by Cover ring.

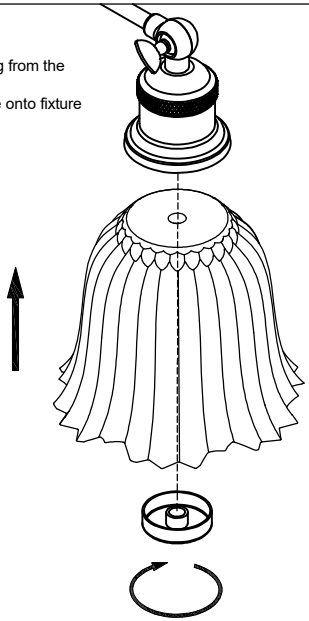

STEP 5

Install RGB bulb.

