













# Assembly Manual

## Counter & Bar Height Stool

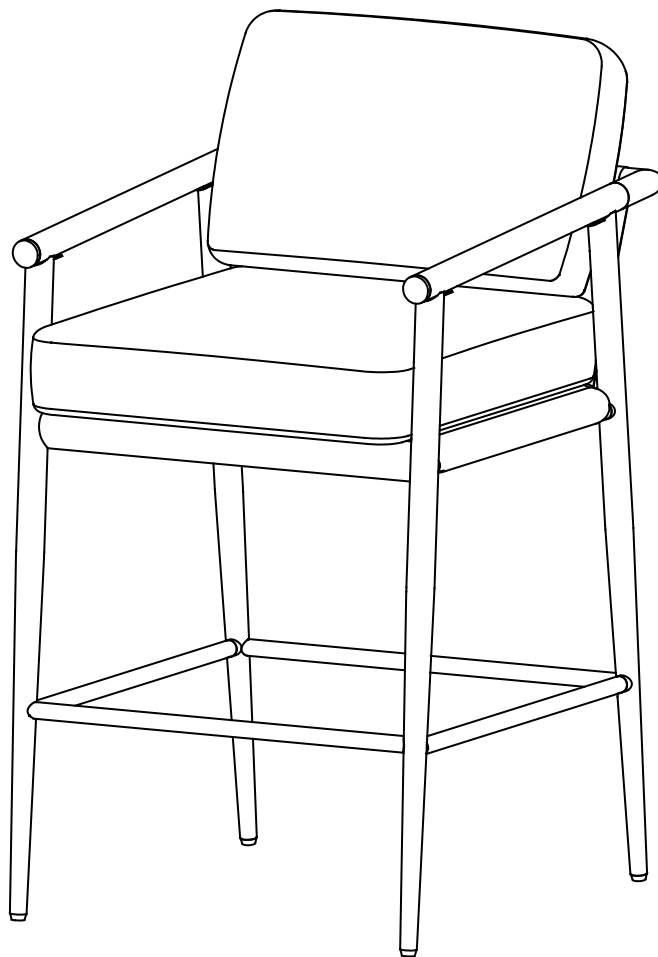

### **CAUTION**

THIS ASSEMBLY MANUAL CONTAINS IMPORTANT SAFETY INFORMATION.  
PLEASE READ AND KEEP FOR FUTURE REFERENCE.



|  |   |  |  |
|--|---|--|--|
| <p>Ax1</p>  <p>Back Cushion</p>    | <p>Bx1</p>  <p>Seat Cushion</p>      | <p>Cx1</p>  <p>Seat &amp; Back</p> | <p>Dx2</p>  <p>Wood Arm</p>        |
| <p>Ex2</p>  <p>Connecting Rod</p> | <p>Fx1</p>  <p>Front Leg (Short)</p> | <p>Gx1</p>  <p>Back Leg (Long)</p> | <p>Ix8</p>  <p>M6 x 16mm Bolt</p> |
| <p>Jx6</p>  <p>M6 x 20mm Bolt</p> | <p>Kx1</p>  <p>4# Allen Wrench</p>   | <p>Hx4</p>  <p>15mm Felt Pad</p>   |  |

Please read through the instructions below to familiarize yourself with the parts and steps before assembly.

**Note: Do NOT use power tools for assembly.**


## ASSEMBLY INSTRUCTIONS

- 1 Detach the Velcro at the front of the Seat (C)

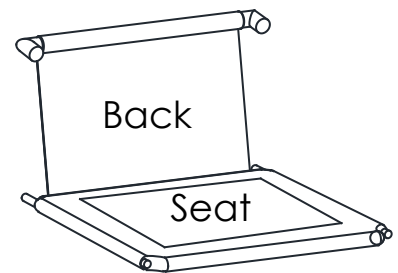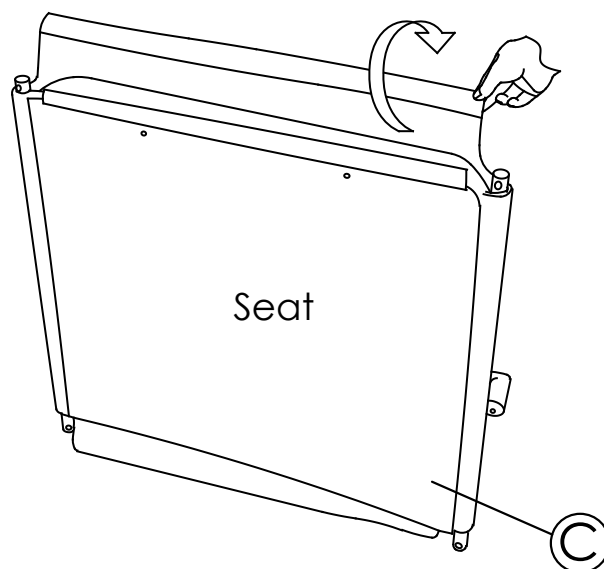


- 2 Insert Front Leg (F) into Seat (C). Please insert both sides at the same time and apply some pressure. Attach both sides of Front Leg (F) to Seat (C), using Bolts (I) and Allen Wrench (K). Fully tighten.


**Note: Front Leg (F) is shorter than Back Leg (G).**

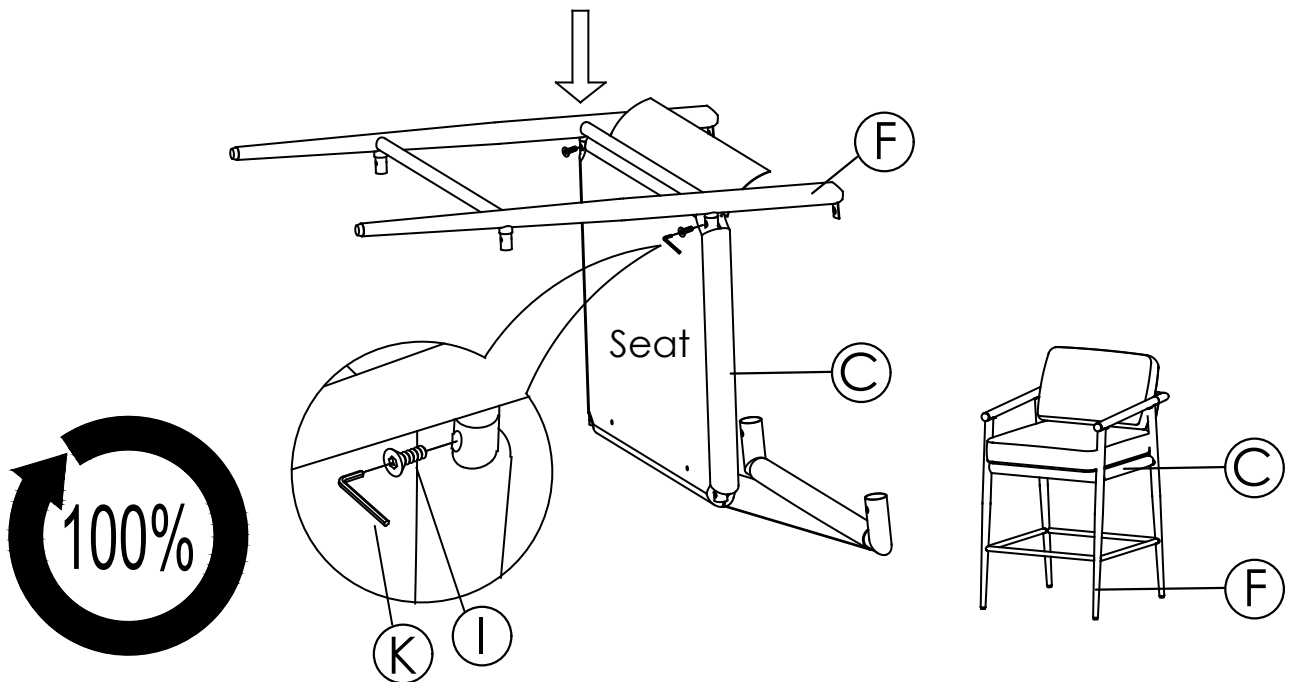


- 3** Attach the Velcro as shown below.

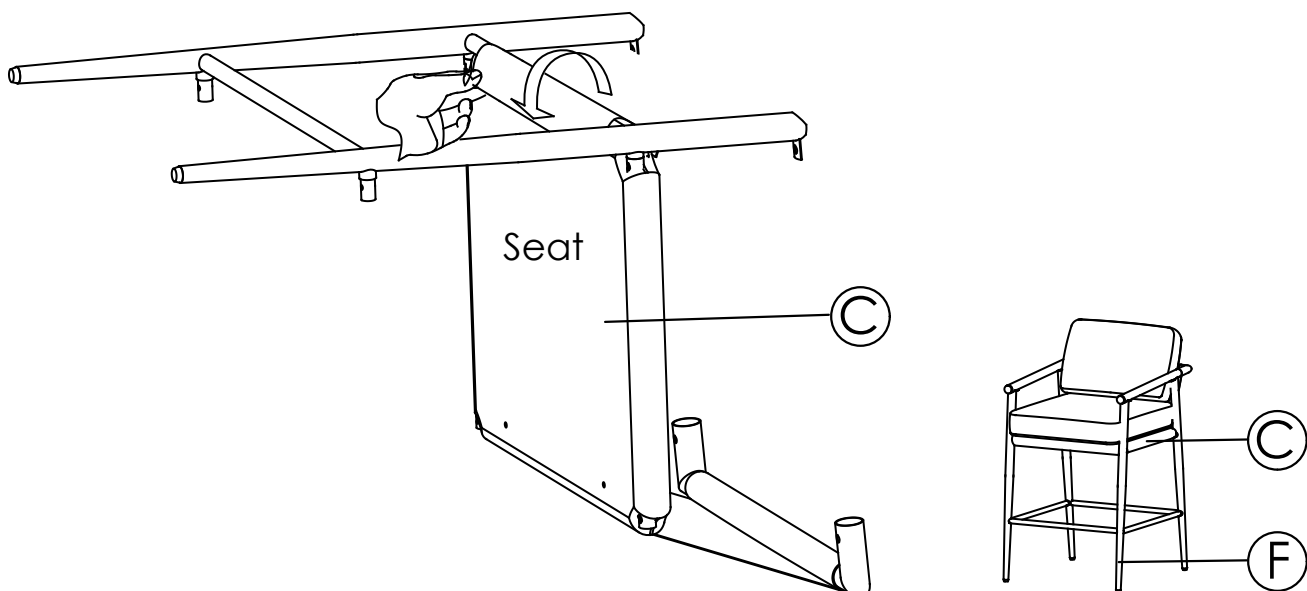


- 4** Attach Connecting Rods (E) to Front Leg (F), using Bolts (I) and Allen Wrench (K). **Do not fully tighten yet.**

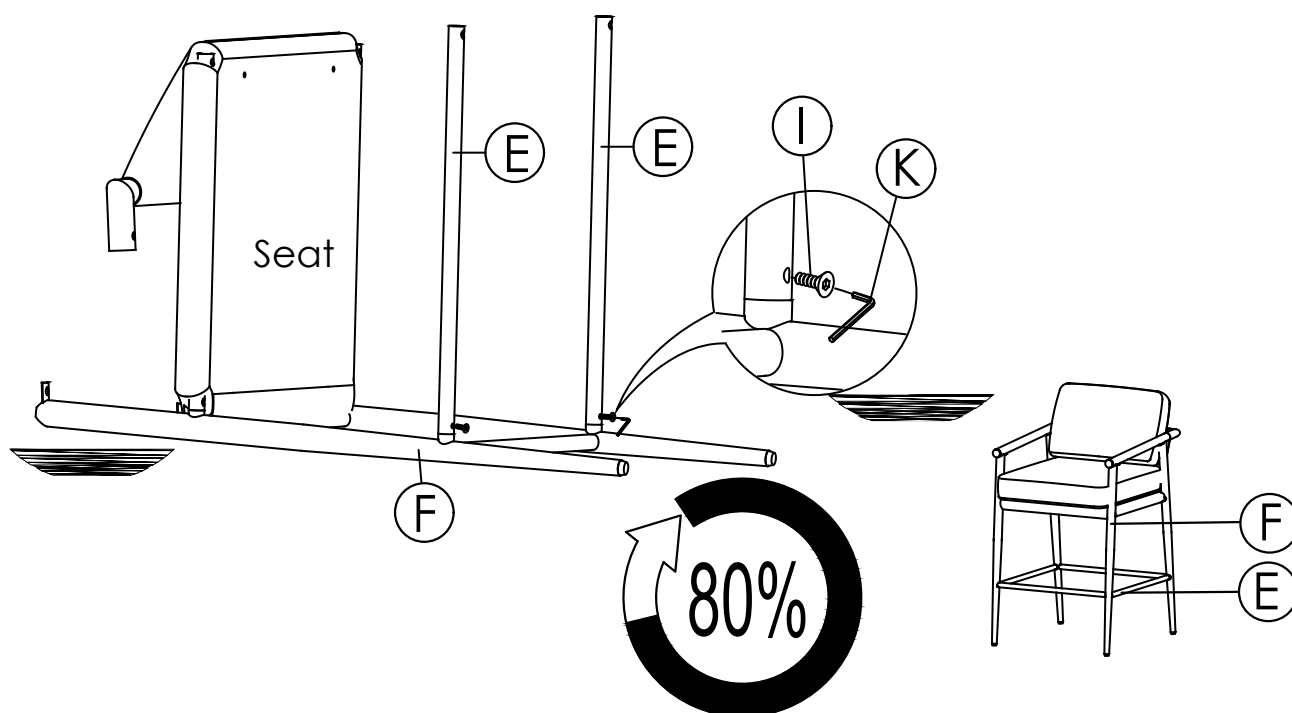


- 5** Attach Back Leg (G) to Connecting Rods (E) and both sides of Seat (C). **Do not fully tighten yet.**

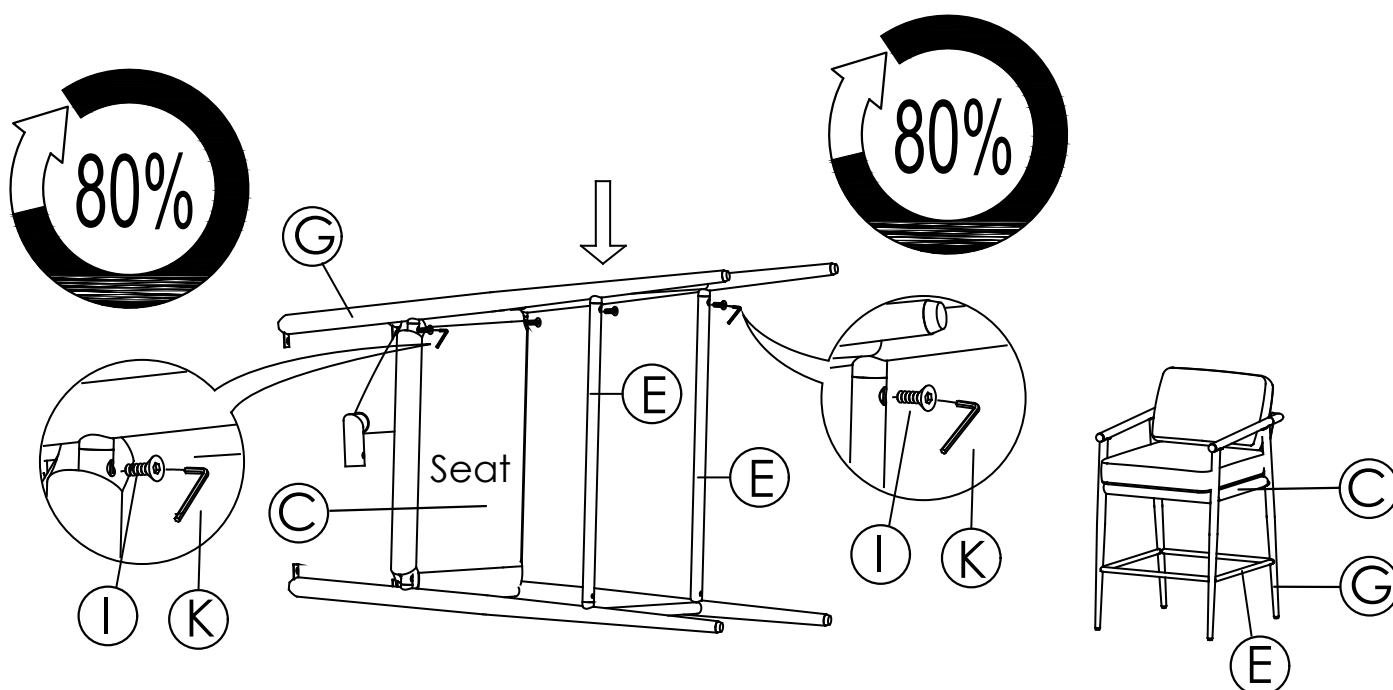


- 6** Attach Wood Arms (D) to Back (C), using Bolts (J) and Allen Wrench (K). **Fully tighten.**

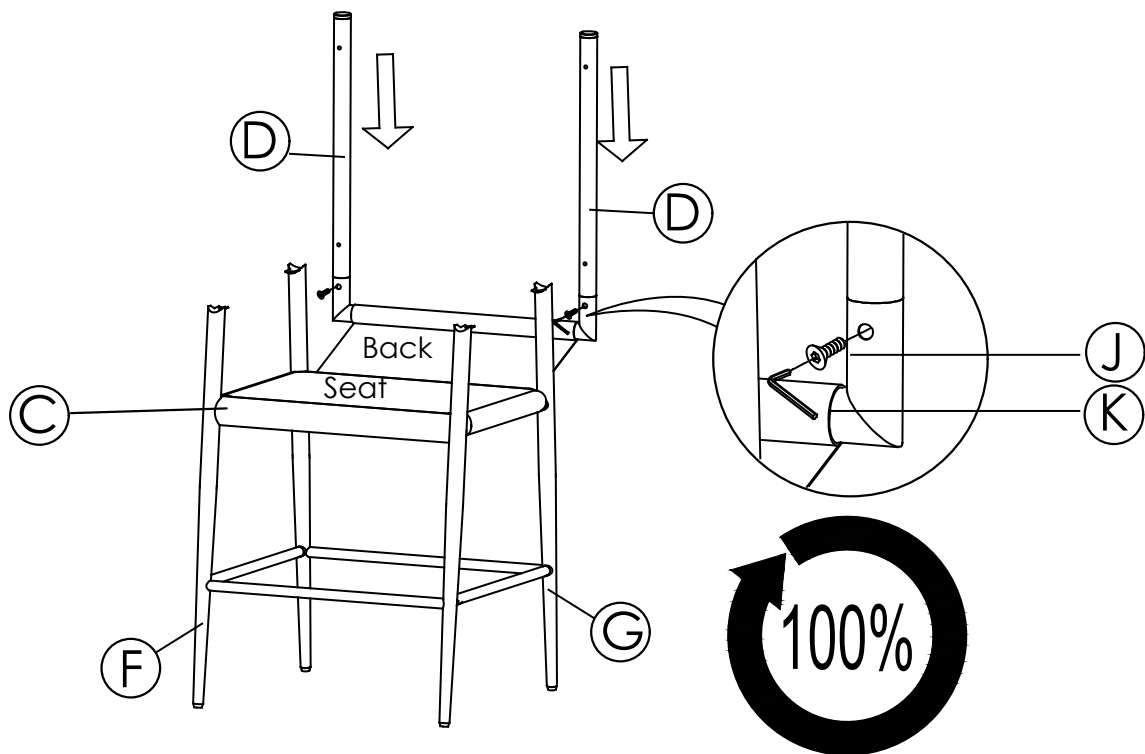


- 7** Attach Wood Arms (D) to front legs and back legs, using Bolts (J) and Allen Wrench (K). Start with bolts at the front legs and then move on to the bolts at the back legs. **Do not fully tighten yet.**

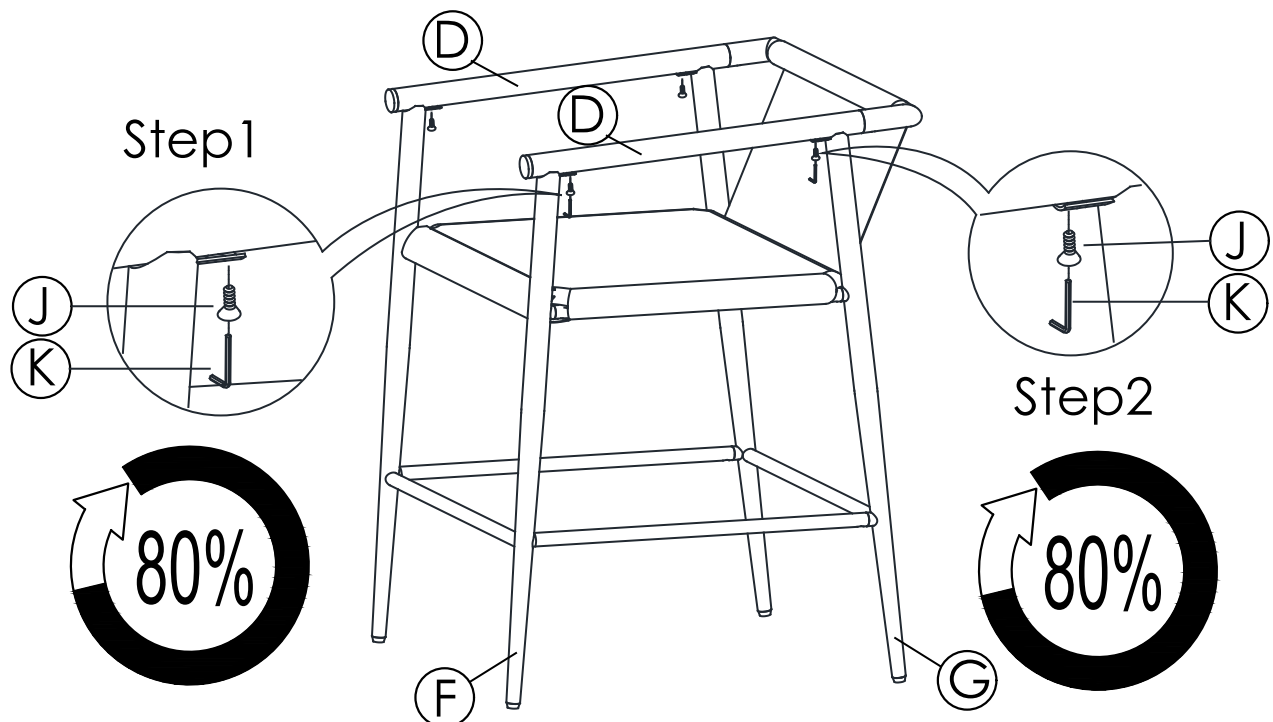


- 8** Use Allen Wrench (K) to fully tighten all bolts in Step 4, 5 and 7 (ten bolts in total).

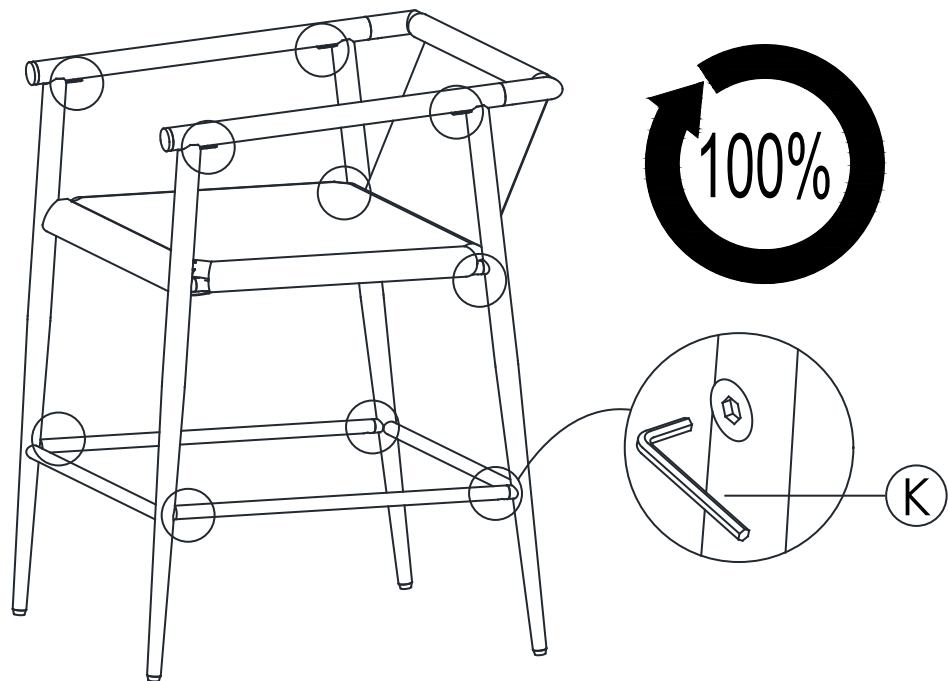


- 9** Complimentary Felt Pads (H) are included to help protect your floor or make the stool slide easier.

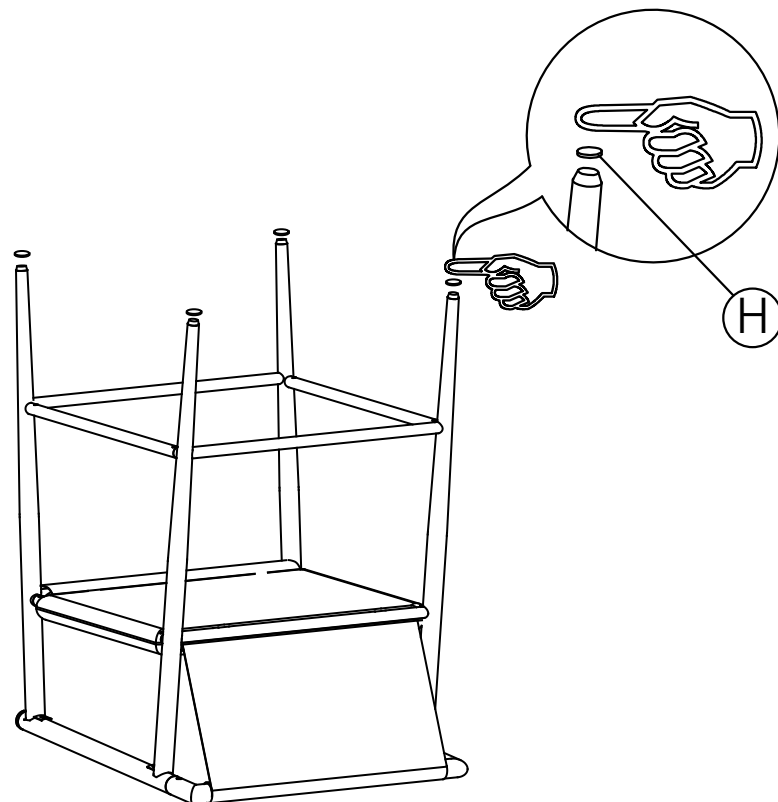

- 10** Put Seat Cushion (B) and Back Cushion (A) on the stool.

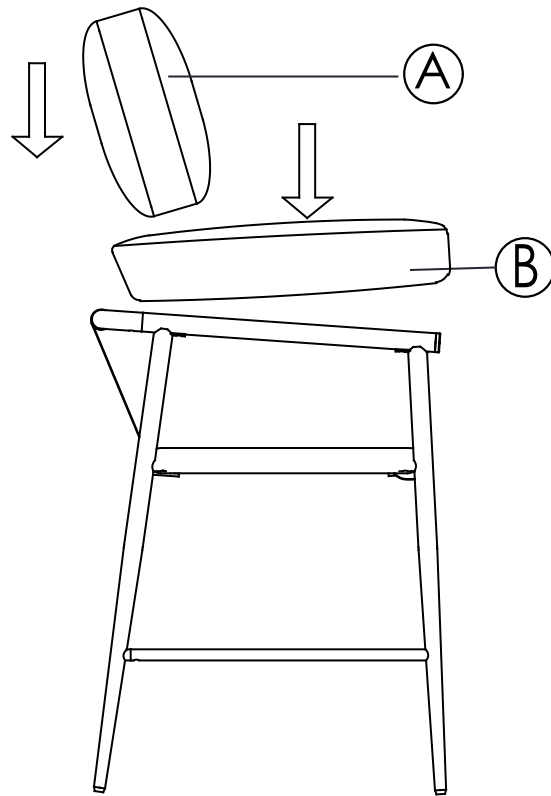

- 11** Turn assembled stool upright and place on a flat surface.  
**Note: Each leg has an adjustable foot leveler to help level your stool.**

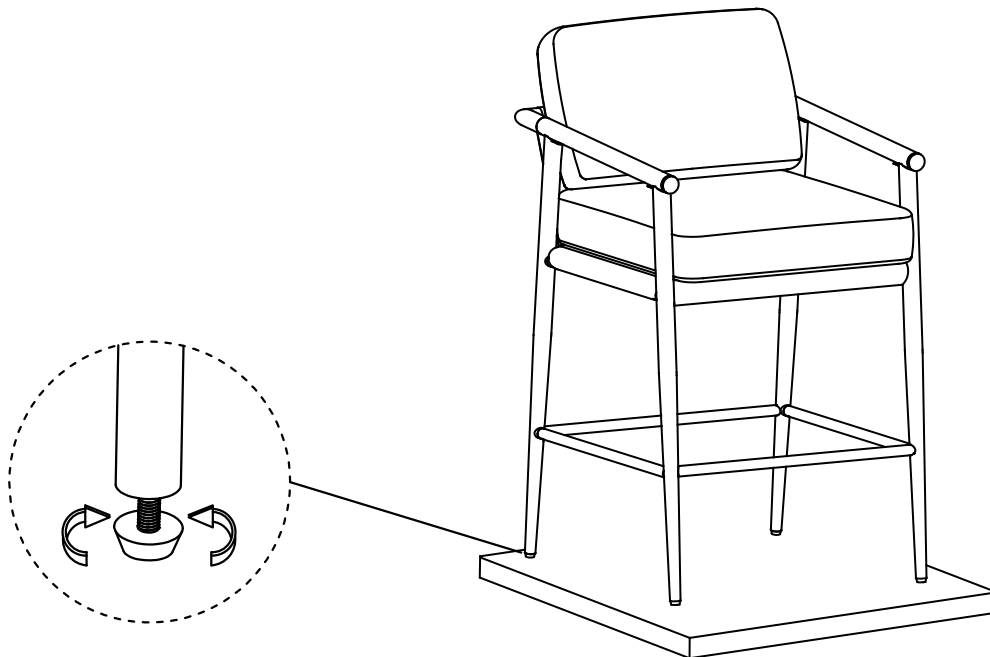

- 12** Assembly complete. Enjoy.



