

IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.



For any replacement parts or installation issues, please Contact Us!

INSTALLATION INSTRUCTIONS

1. Measure Canopy (D) height with measuring tape. Adjust hex nut on Canopy Screws (E) to the height of measured Canopy (D) plus 1/4" to allow Canopy Screws (E) to protrude through Canopy (D) during installation.
2. Secure Mounting Plate (A) to existing junction box using Mounting Screws (B) provided. Mounting Plate (A) should be positioned with Canopy Screws (C) pointing away from the junction box.
3. Place Canopy (D) against the ceiling by inserting Canopy Screws (E) through the appropriate holes located on Canopy (D). Adjust Canopy Screws (E) and hex nuts until 1/4" of the threaded portion is visible. Remove Canopy (D) once Canopy Screws (E) have been adjusted.
Note: If 1/4" of Canopy Screws (E) are not visible, remove Canopy (D) and re-adjust hex nuts on Canopy Screws (E) to proper length.
4. Remove Finial (O) and Cap (N) from the bottom of Fixture Body (J). Slide the notch on the top section of Vertical Ring (M) into the notch on top of Fixture Body (J). Secure the bottom of Vertical Ring (M) to the bottom of Fixture Body (J) with Screws (I). Repeat for each Vertical Ring (M).
5. Secure Cap (N) and Finial (O) back over the nipple on the bottom of Fixture Body (J).
6. Secure each end of Horizontal Ring (L) together with Screwdriver (P) and Screws (I). Place Horizontal Ring (L) onto each hook on Vertical Rings (M).

7. Assemble one end of Chain (G) to the loop on top of Fixture Body (J) by carefully pulling apart the chain link and closing it around the loop with chain pliers.

Note: For quick and easy assembly, we recommend using oval screw links.

8. With chain pliers, remove excess Chain (G) to achieve desired hanging length. Once Chain (G) is to desired length, use wire cutters to cut Wire (H) 10” beyond the length of Chain (G) for easier wire connection.


9. Weave Wire (H) upwards through every 4-5 links in Chain (G).

10. Open the top chain link with chain pliers and close it around Canopy (E) loop. Carefully lift Fixture Body (J) (with the help of a friend).

Note: For quick and easy assembly, we recommend using oval screw links.

11. Insert the end of Wire (H) through the hole in Canopy (E) into the junction box.

12. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

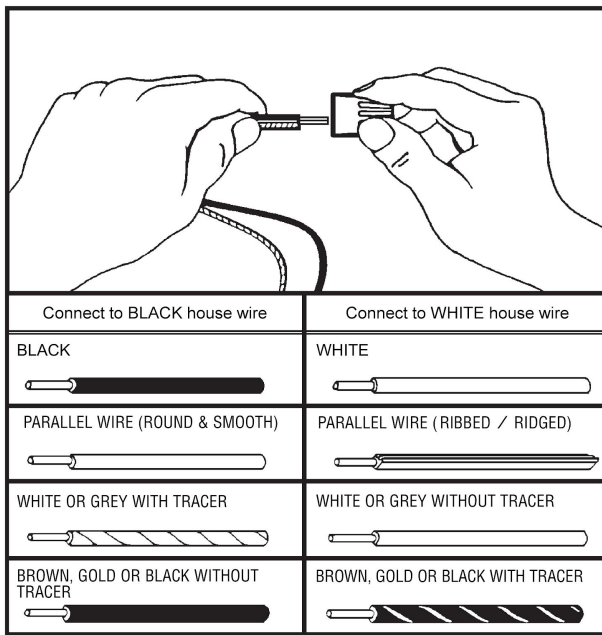

A. Connect the ground wire (bare copper or green) from your fixture to the:

- 1) ground wire in the junction box, or
- 2) ground screw in the junction box

B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/grey with tracer, brown/gold without tracer).

C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/grey without tracer, brown/gold with tracer).

13. Place all Wires (H) and Wire Connectors (C) back into the junction box.

14. Place Canopy (E) against the ceiling, ensuring Canopy Screws (D) are protruding through the holes in Canopy (E). Secure Canopy (E) in place to Mounting Plate (A) with Decorative Caps (F).

Note: If the fixture doesn't sit flush against the ceiling, remove Canopy (E) and readjust Canopy Screws (D) and hex nuts.

15. Install bulbs (not included) into Socket (K).

Enjoy your new fixture!

PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder, Chain Pliers

