





Parts, Hardware, and Suggested Tools

Unit Common Description	Units Per Model
Cross Brace - Square	1
J Frame	4
5/16-18 x 1 1/2" tap bolt w/black xylan	24
5/16-18 nylock nut w/black xylan	24
5/16 uss flat washer w/black ox	48
#vc300-8 5/16" bolt size 1/2" lg vinyl cap	24
38" Concave Seat	4
46" Round Table Top	1

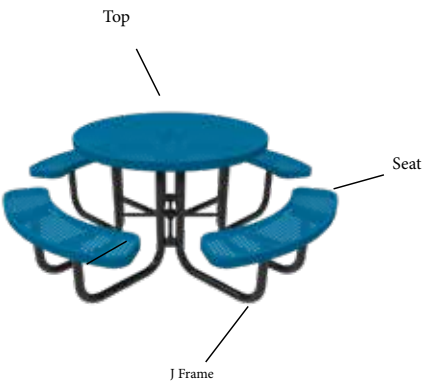

Suggested Tools



Open Face Wrench



Socket Wrench



Tape Measure



Level



Bolt (HW01)



Nut (HW02)



Washer (HW03)



Bolt Cap (HW04)

Assembly Instructions

1. Lay Table Top upsided down (table bracing facing up) on a flat smooth surface. It is Recommended to cover ground under table top to prevent damage.
2. Attachd Frames to table top using provided hardware (1-bolt, 1-nut, and 2-wahers per hole). Table brace should sit inside angle iron on frame. Hand tighten hardware at this time.
3. Attach seats to frames using hardware provided (1-bolt, 1-nut, and 2-wahers per hole. Hand tighten hardware at this time.
4. Attach Cross Braces from to each tab on the center of frame (1-bolt, 1-nut, and 2-wahers per hole). Hand tighten hardware at this time.
5. Flip Table right side up.
6. Level Tops and Seats and use socket and open face wrench to fully tighten hardware. Place Bolt End Caps on bolt ends.