

Bathroom Faucet Instruction Manual



Will this faucet fit my sink?

Max countertop thickness: 1.38"

Pre-drilled hole size requirement:





Hole size 1.26"-1.57"


Max counter top thickness without deck plate:




Deck thickness Ø1.38"

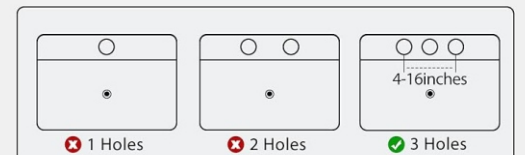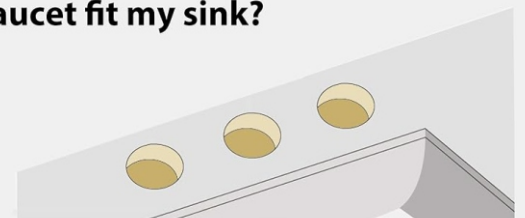


- 1** Insert the spout to the hole of sink/deck platform, align the washer, metal washer and nut as shown, thread the nut onto the shank and wrench tighten.

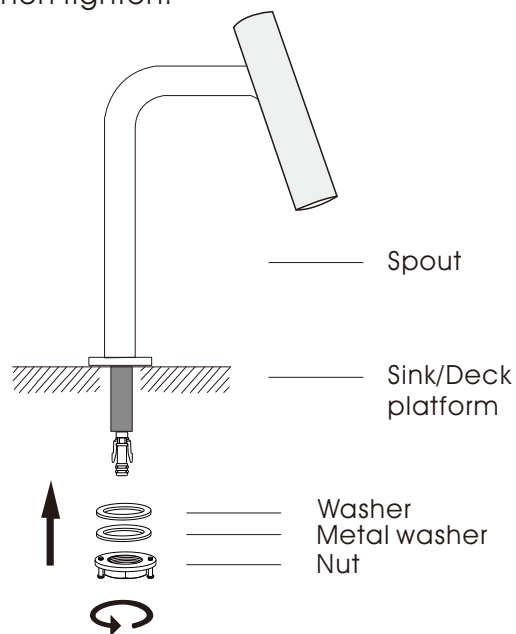

- 2** Insert the "COLD" handle on the right hole of the sink/deck platform, align the washer, metal washer and nut as shown, tighten the nut onto the shank by hands and tighten the screws to secure by tool. The "HOT" handle installation is same as "COLD" handle.

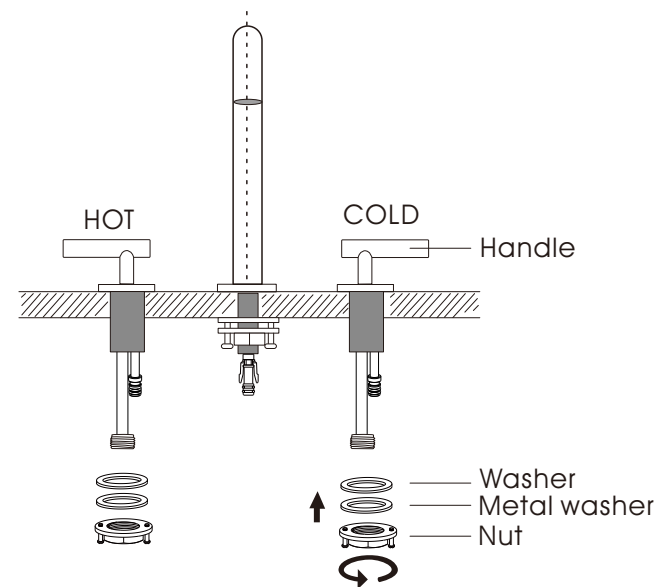


- 3** Align the position as shown, insert the quick-connector of the hose to the shank of the HOT/COLD handle and spout.

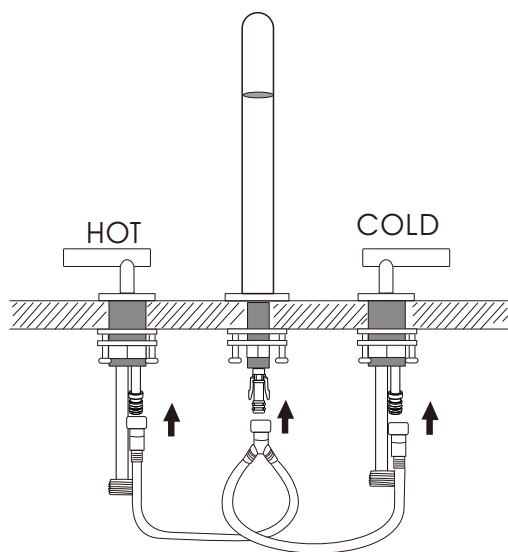

Provided hose W/ quick-connectors

- 4** Connect the water supplies. (Make sure washer is installed inside)

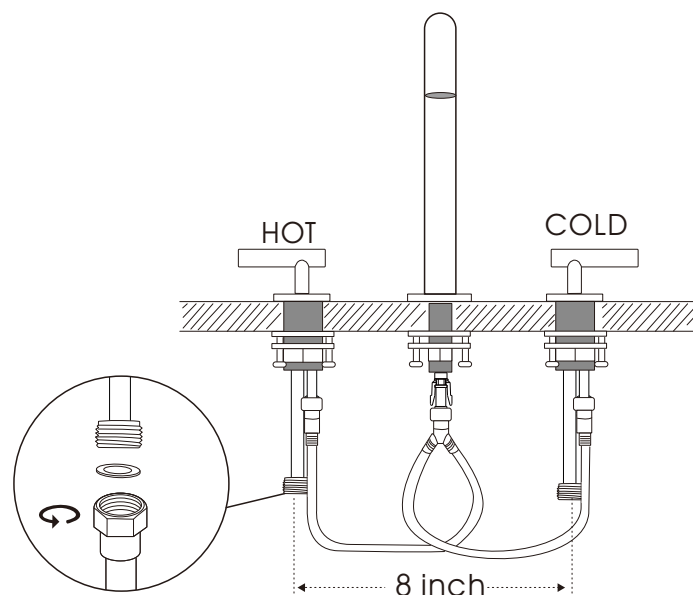

1/2"-14NPSM-2A