


Glass filler handles both paper & glass cups


System limit
temp: 40°F min. to 140°F max.
pressure: 100 psi max. static



unit: inch (mm)

K1033C-M

Flow Adjustment:
To adjust water flow,
loosen nut (2) with
a wrench, then use
screwdriver to
turn screw (1)
to desired for
leaks.

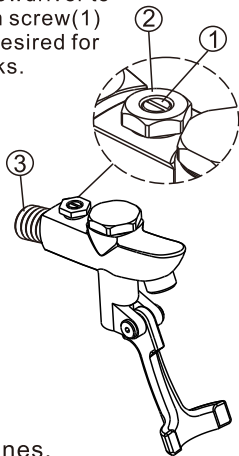

1. Turn off water supply and drain lines.
2. Use the threads (3) of faucet to connect to the device.