


ASSEMBLY INSTRUCTION


4-CYLINDER PENDENT LIGHT

A Lamp Body




1pc

B Lamp Shade




4pcs

C Ring
Ø41*14.5mm



4pcs

D Flat Washer
Ø5/32"*12mm



2pcs

E Bolt
Ø5/32"*25mm



2pcs

F Wire Connector
Ø9.9*17.7mm



2pcs

G Wire Connector
Ø8.6*15.2mm




1pc

H Bolt
Ø5/32"*8mm



3pcs


I Bulb(Not provided)



4pcs


IMPORTANT SAFETY INSTRUCTIONS

THIS FLOOR LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER) AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

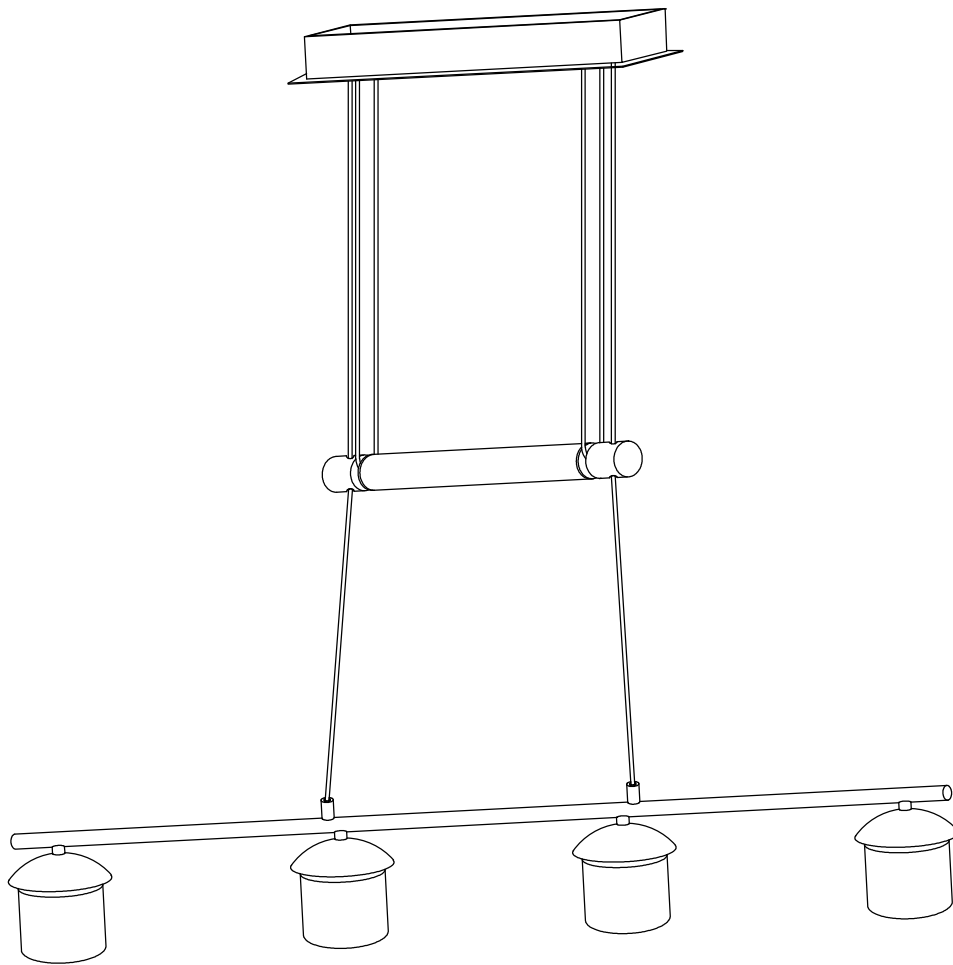


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


1 Take off the Ring (C) from Lamp Body (A).

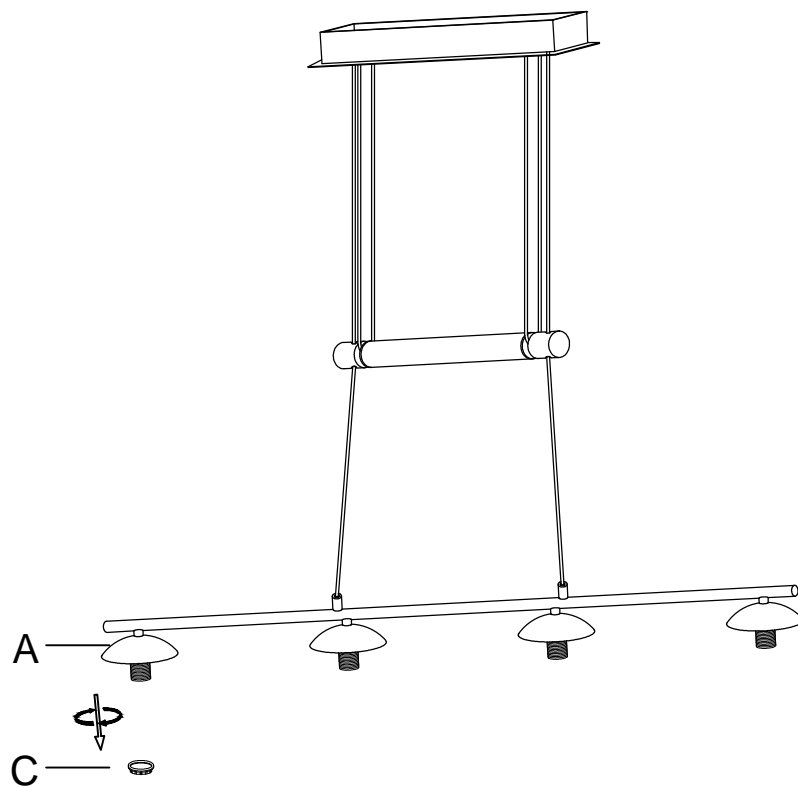

2 Assemble the Lamp Shade (B) to Lamp Body (A) and using the Ring (C) to tight it. Then, assemble the Bulb (I) to the lamp holder in the Lamp Shade (B).

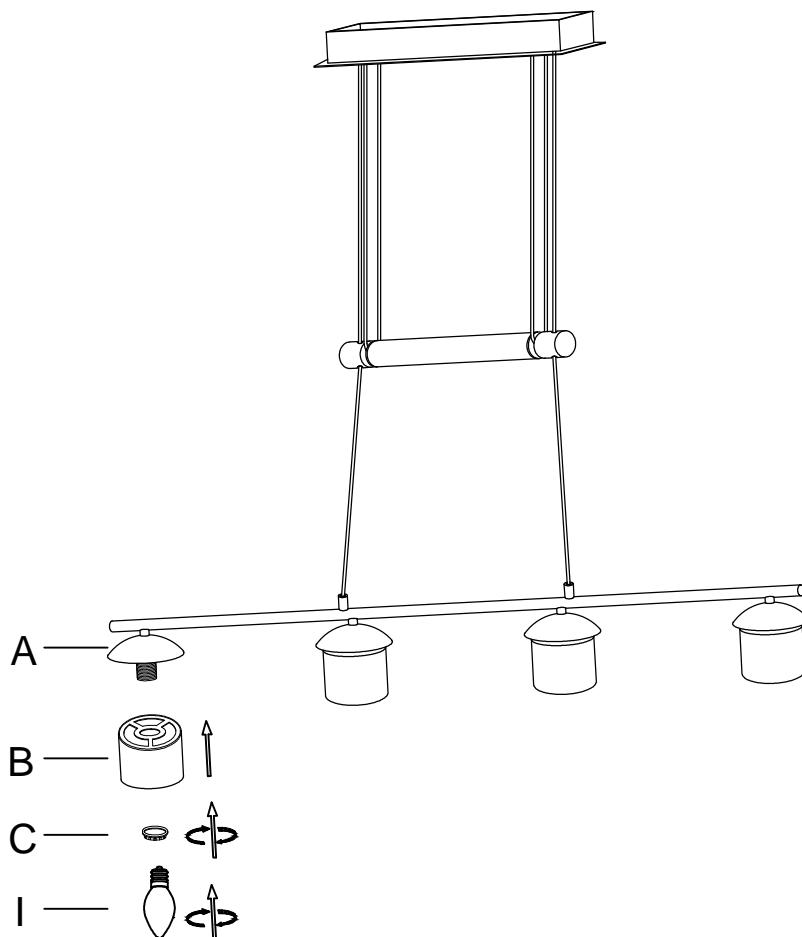

- 3** Firstly, remove Bolt (H) from the ceiling base of Lamp Body (A) and take out the bracket. Secondly, use Bolt (E) and Flat Washer (D) to tight the bracket on the ceiling by screwdriver, connect Wire Connector (F) & Wire Connector (G) together with cable. Finally, put the ceiling base back to cover the bracket and using Bolt (H) by screwdriver to fix them.

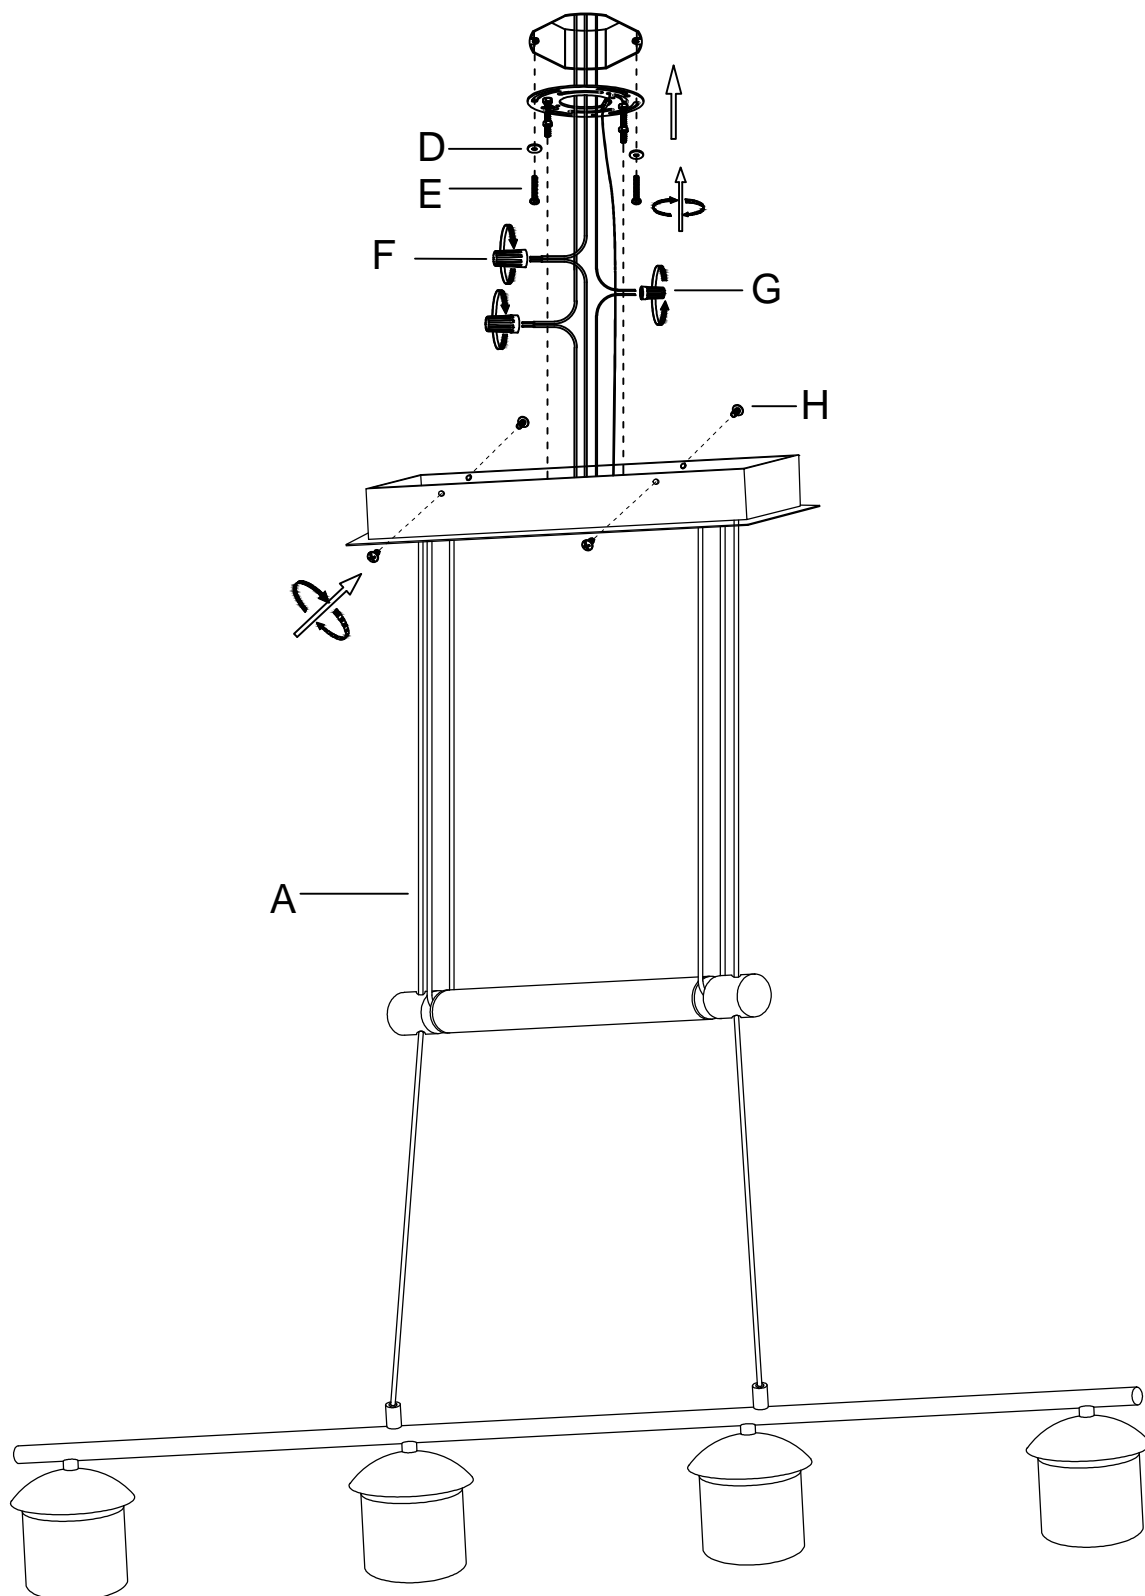

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.