


Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



Care and Cleaning

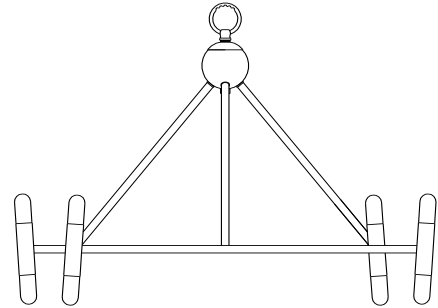






To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

Part List and Hardware List

A	Wire Nut	X3		J	Closable link	X2	
B	Crossbar	X1		K	Chain	X1	
C	Outlet Box Screw	X2		L	Canopy Nut	X1	
D	Green Ground Screw	X1		N	Fixture Loop	X1	
E	Hex Nut	X1		M	Bulb Shield	X16	
F	Nipple	X1		O	Tube	X16	
G	Metal washer	X1		P	G9 Bulb	X16	
H	Canopy	X1		Q	Fixture Body	X1	
I	Hanging Loop	X1					

Installation


Step 1

Unpack all parts from carton carefully.

Place the Canopy (H) onto the Hanging Loop (I)

Screw the Nipple (F) into the threaded portion of the Hanging Loop (I) and fix it by turning the Canopy Nut (F) clockwise till tight.


Attach the Closable Link (J) onto the Hanging Loop (I).

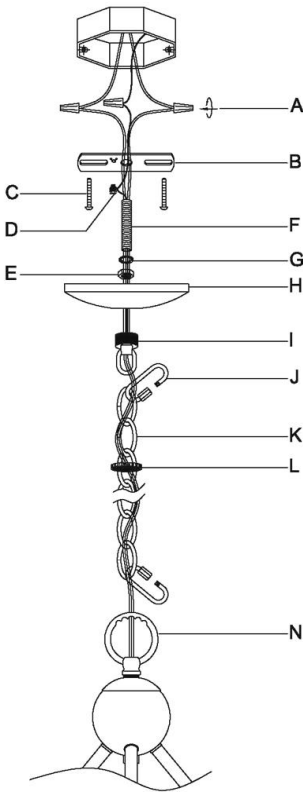

Step 2


Thread the Fixture Loop (N) to top of Fixture Body (Q).

Attach the Closable Link (J) onto the Fixture Loop (N).

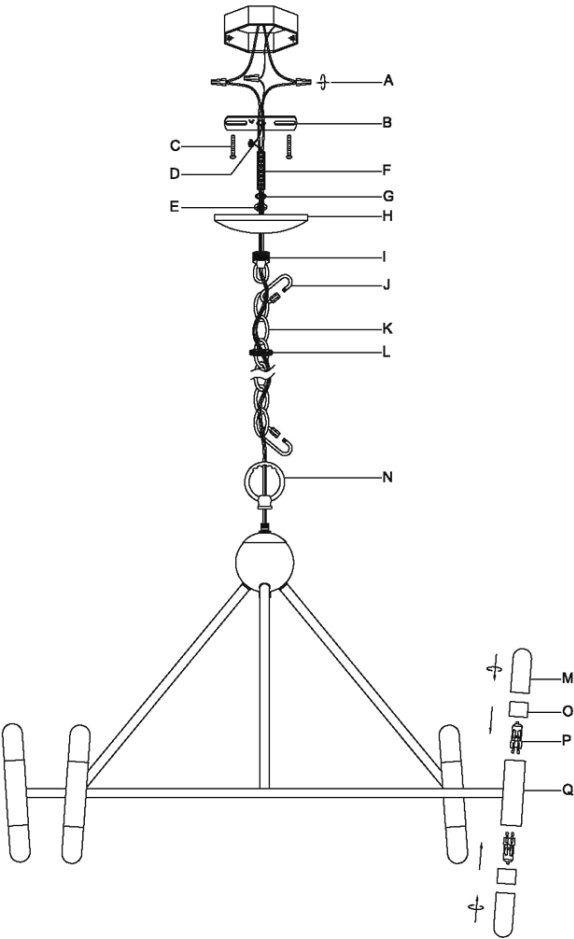


Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)




Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Separate the Crossbar (B) from the Canopy (H) by unscrewing the Canopy Nut (L).

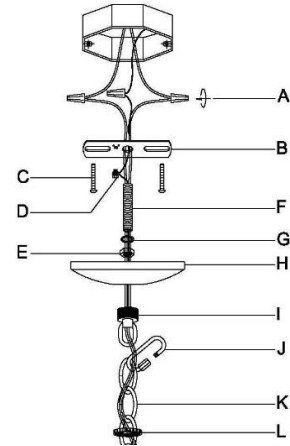


Step 5

Install the Crossbar (B) to the junction box with Outlet Box Screws (C).

Attach the Canopy (H) to the junction box and fix it by turning the Canopy Nut (L) clockwise.

Slide the Tubes (O) over the sockets, Insert the G9 bulbs (P) into the sockets, and then thread the Bulb Shields (M) to the Fixture Body (Q) as shown.

**PLEASE USE TYPE G9 LED BULB MAX. 5-WATT.
THERE ARE 16*2-WATT G9 LED BULBS IN THE BOX.**

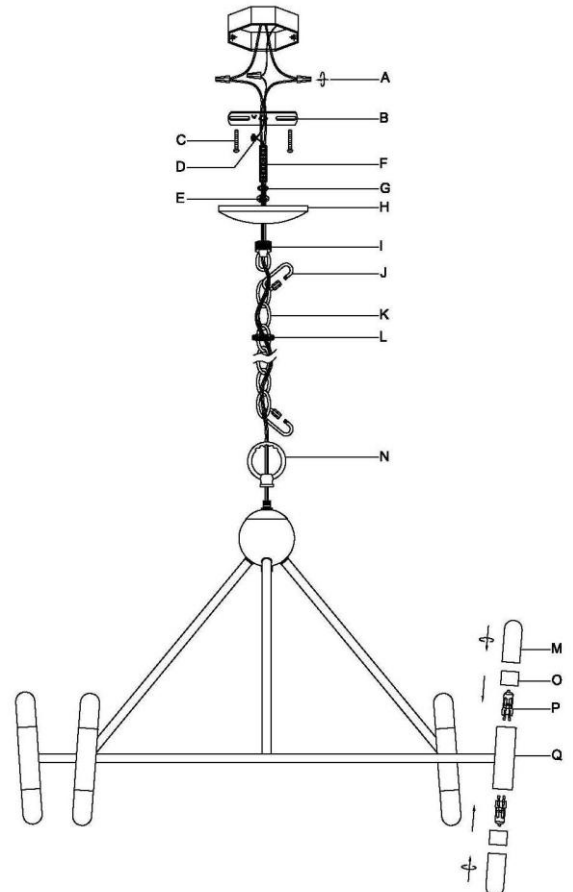

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor.

ENJOY YOUR LAMP