

**24" Garage Wall Cabinet**


## PARTS LIST

Your 24" Garage Wall Cabinet should include the following parts. Please inspect box contents to ensure you have received all components.

If you are missing any parts, need assistance with assembly or have questions, please contact Customer Service.


You will need a Phillips screwdriver for assembly which is not provided.

**A**




**CABINET BODY (1)**

**B**




**TOP PANEL (1)**

**C**




**BOTTOM PANEL (1)**

**D**




**DOOR (1)**

**E**




**SHELF (1)**

**F**




**DOOR HINGE-F (1)**

**G**




**DOOR HINGE-G (1)**

**H**



**SHELF SUPPORT (4)**

**I**



**KEY (2)**

**J**




**BLACK SCREW  
(24) + (2) extra**

**K**




**MOUNTING SCREW (4)**

**L**



**ANCHOR (4)**

**M**




**WALL BRACKET (1)**


# ASSEMBLY INSTRUCTIONS

## STEP 1

Unfold CABINET BODY (A).



A (1)

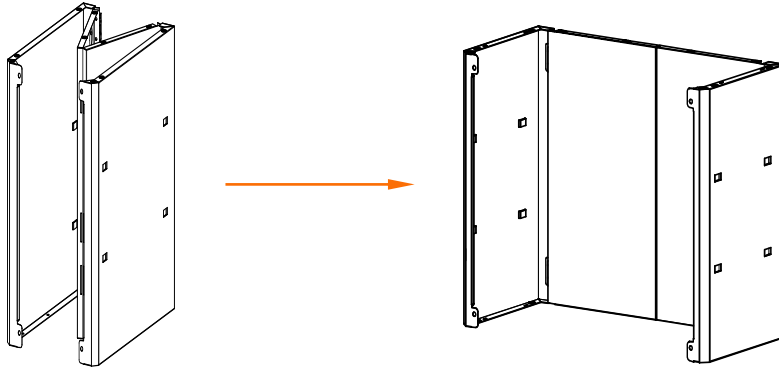

## STEP 2


Two people are recommended for ease of assembly. Stand the unfolded CABINET BODY (A) upside down on the floor.

Note: There is a 40mm diameter hole on the back panel of the CABINET BODY (A). When the CABINET BODY (A) is upside down, this hole should be in the upper left corner of the back panel.

Turn BOTTOM PANEL (C) upside down. Tilt the front diagonally downward. First, insert the lip into the inner side of the tab of CABINET BODY (A) at the right side, then insert into the left side.


Note: Do not install screws in the two holes at the right or left front corners of BOTTOM PANEL (C) until instructed.

Follow the order indicated, insert (6) BLACK SCREWS (J) through the hole on each back corner and four holes on the back side of BOTTOM PANEL (C). Tighten them fully with a Phillips screwdriver. Insert (2) BLACK SCREWS (J) through the tabs on front of CABINET BODY (A) and tighten them fully to BOTTOM PANEL (C).



C (1)

J (8)

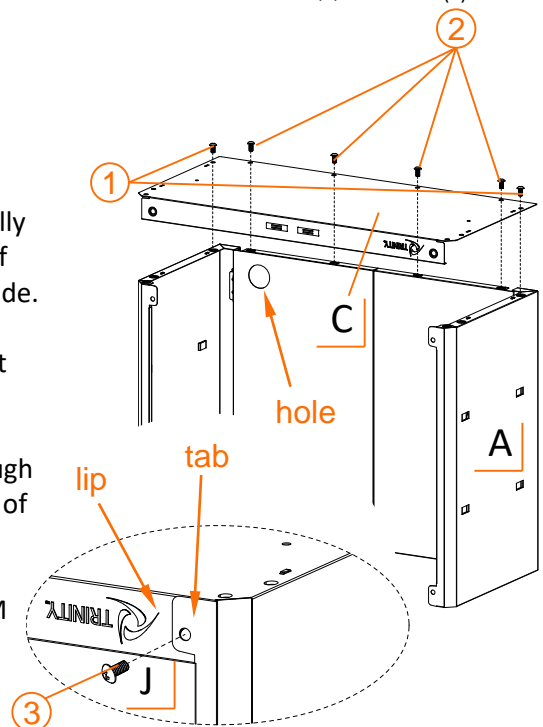

# ASSEMBLY INSTRUCTIONS

## STEP 3

DOOR (D) can be installed on the left **OR** right side of the cabinet. Only install one hinge in this step.


### RIGHT INSTALLATION:

Position DOOR HINGE-G (G) on the left front corner of the outside of BOTTOM PANEL (C) and align the holes. Make sure the pivot of hinge faces down.

### LEFT INSTALLATION:

Position DOOR HINGE-F (F) on the right front corner of the outside of BOTTOM PANEL (C) and align the holes. Make sure the pivot of hinge faces down.

Insert (2) BLACK SCREWS (J) through the DOOR HINGE (F or G) and (2) through BOTTOM PANEL (C). Tighten fully with a Phillips screwdriver.

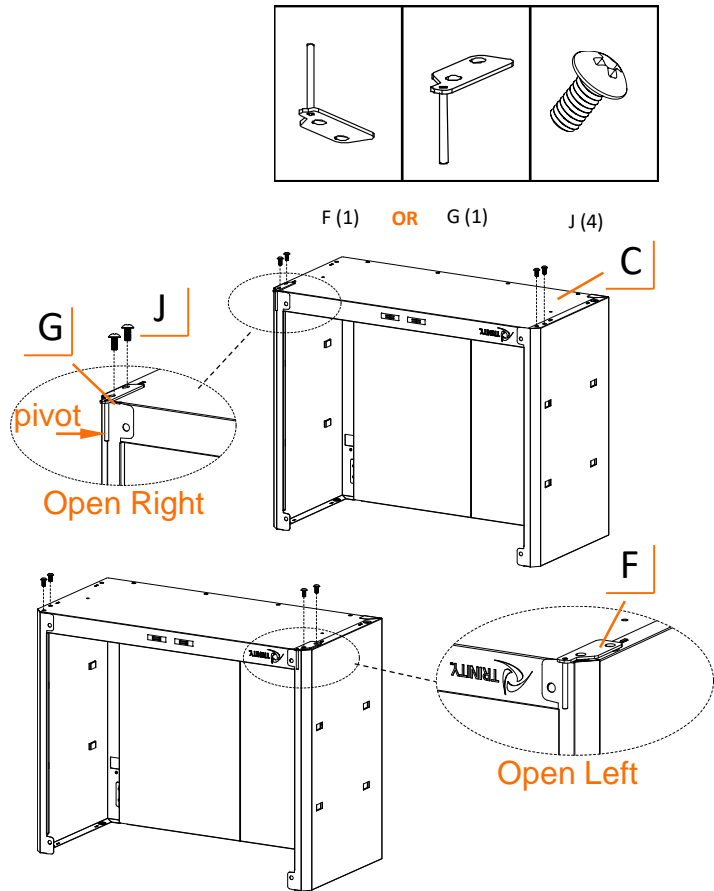


## STEP 4

Stand the unit right side up.

Tilt front of TOP PANEL (B) diagonally downward. First, insert the lip into the inner side of the tab of CABINET BODY (A) at the right side, then insert into the left side.

Note: Do not install screws in the two holes at the right or left front corners of TOP PANEL (B) until instructed.

Follow the order indicated, insert (6) BLACK SCREWS (J) through the hole on each back corner and four holes on the back side of TOP PANEL (B). Tighten them fully with a Phillips screwdriver. Insert (2) SCREWS (J) through the tabs on front of CABINET BODY (A) and tighten them fully to TOP PANEL (B).

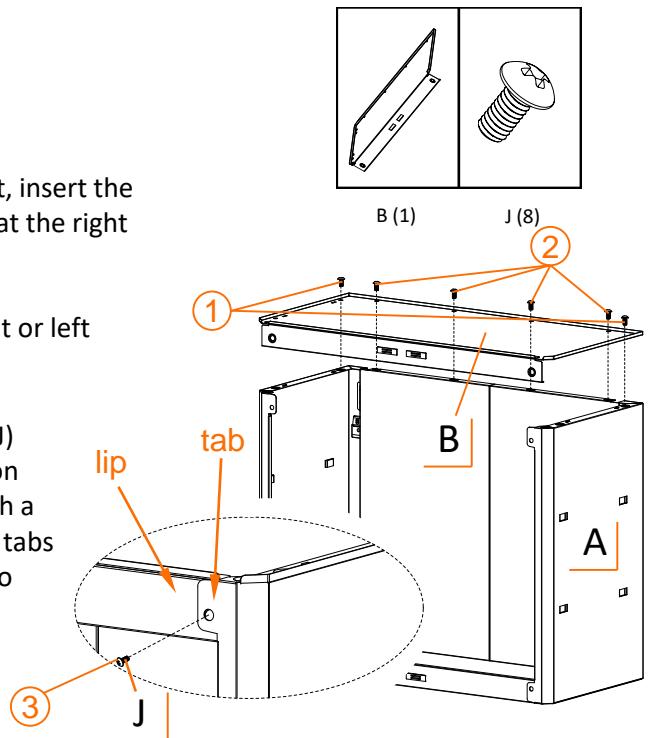


# ASSEMBLY INSTRUCTIONS

## STEP 5

Attach DOOR (D) to the cabinet front by sliding the bottom door cylinder over the DOOR HINGE (F or G) installed in Step 3.

Position remaining DOOR HINGE (G or F) to the left or right front corner of TOP PANEL (B). Make sure to insert the pivot of DOOR HINGE into the top door cylinder first.

Align holes on DOOR HINGE (G or F) to pre-installed nuts on frame of CABINET BODY (A). Insert (2) BLACK SCREWS (J) through the DOOR HINGE (G or F) and (2) through TOP PANEL (B). Tighten fully with a Phillips screwdriver.

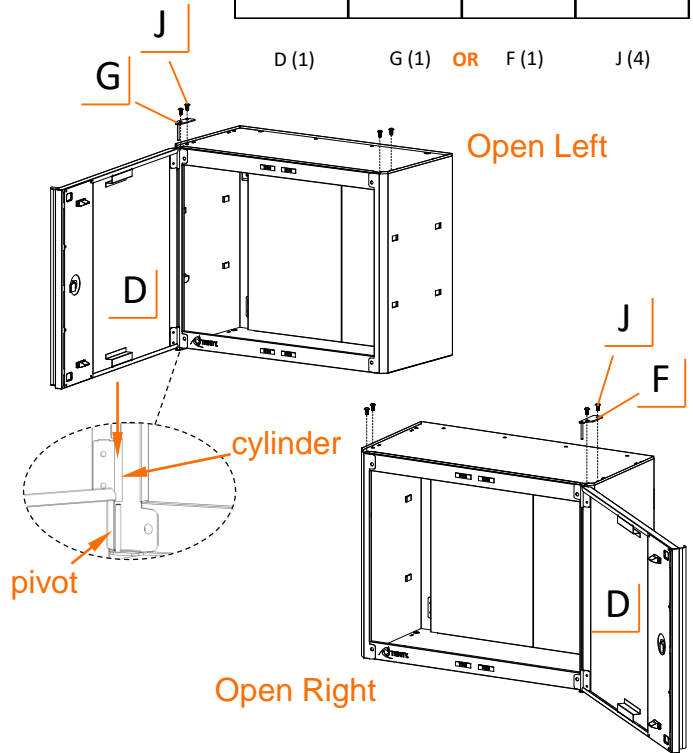


## STEP 6

Position WALL BRACKET (M) on the wall at the desired height.

If needed, use a pencil to mark off the mounting location on the wall through one of the oval holes on each end of WALL BRACKET (M). Drill holes in marked locations. Insert ANCHOR (L) completely into each drilled hole.

Fasten SCREWS (K) through the oval holes on WALL BRACKET (M) into the wall or anchors tightly with a Phillips screwdriver.

Note: Please consult a local contractor if you are unsure if your wall is able to bear the load of the wall cabinet.

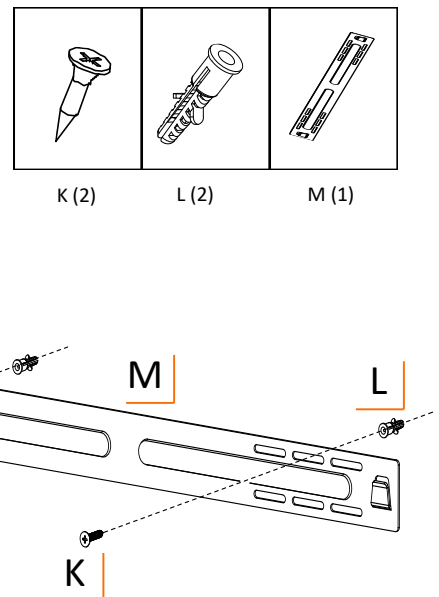


# ASSEMBLY INSTRUCTIONS

## STEP 7


Lift the cabinet and hang it carefully on two hooks of WALL BRACKET(M) through two square holes on the back side of cabinet. Two people are needed, DO NOT attempt this alone.

There are two small round holes on the back side of cabinet. Use a pencil to mark off the fastening location on the wall through the holes. Drill holes in marked locations. Insert ANCHOR (L) completely into each drilled hole. Insert SCREWS (K) through the round holes on cabinet into anchors. Fasten the screws tightly with a Phillips screwdriver.



K (2)


L (2)

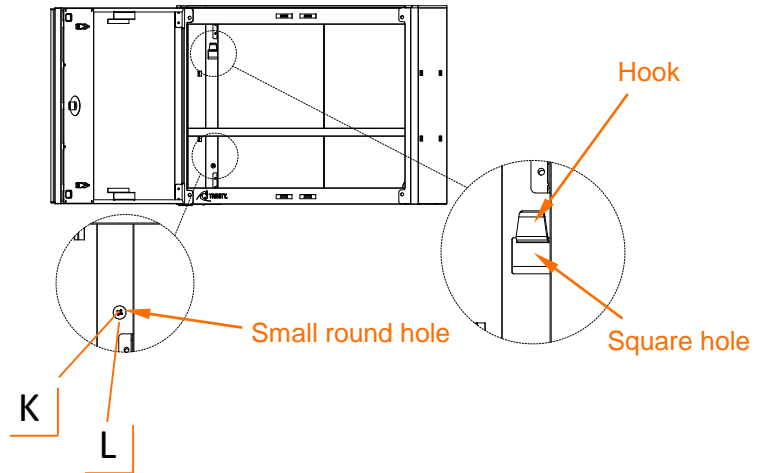

## STEP 8



Attach SHELF SUPPORT (H) by hooking it over the position tab at your desired height. Make sure all four SHELF SUPPORTS (H) are at the same level.

Tilt SHELF (H) diagonally to move it inside the cabinet. Place SHELF (E) on top of all four SHELF SUPPORTS (H).



H (4)

E (1)

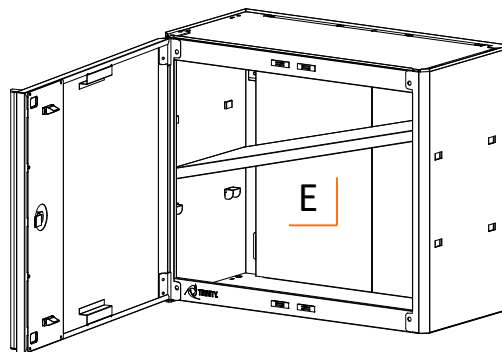

Shelf supports hooked on position tabs


# USAGE INSTRUCTIONS

## SHELF ADJUSTMENT

Ensure all products have been removed from the shelf.

To adjust the shelf, take the shelf out of the cabinet and re-attach the shelf supports to the position tabs at your desired height.


Tilt the shelf diagonally to move it inside the cabinet. Place the shelf on top of all four shelf supports.

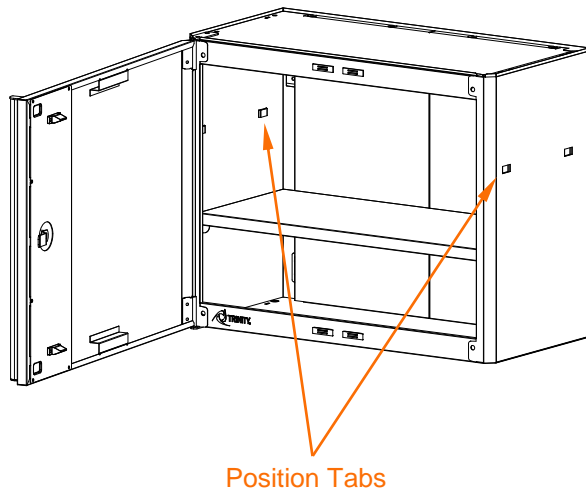


## LOCK AND UNLOCK

Insert the key into the lock on the right door. Turn it clockwise 90 degree to lock the door. Turn it counter-clockwise 90 degree to unlock the door.

Before locking the unit, make sure the doors are fully closed.



Red indicates locked



Green indicates unlocked

# SERVICE PARTS LIST

Part Number	Description	Part Number	Description
1) PBK-16-004-2411	Top Panel	9) PBK-08-008-2319	Door
2) PBK-18-018-2412	Cabinet Body	10) AMA-05-019-1850	Door Handle
3) XBK-02-001-0003	Magnetic Catcher	11) PBK-09-012-0001	Door Hinge-G
4) PBK-03-052-2410	Shelf	12) XBK-01-004-0612	Black Screw
5) XSV-02-017-0001	Shelf Support	13) PBK-19-005-2402	Wall Bracket
6) PBK-16-003-2411	Bottom Panel	14) ZSV-01-003-0530	Mounting Screw
7) XBK-10-001-0XXX	Key	15) XWH-01-032-0630	Anchor
8) PBK-09-011-0001	Door Hinge-F		

