



# Underscore® Rectangle

60" x 32" BubbleMassage™ air bath and whirlpool  
K-1168-XH2G

## Features

- 122 airjets release thousands of bubbles that surround, support, and massage the body.
- Variable-speed blower lets you adjust airjet massage intensity to 18 levels.
- Zones of Control™ feature allows you to target massage to back, midsection, or feet.
- 8 hydromassage jets can be individually adjusted for water flow and direction.
- Variable-speed pump for adjusting hydromassage intensity.
- Built-in heater.
- Lighted keypad controls.
- Sloping backrest provides comfort.
- Slotted overflow allows for deep soaking.
- Automatic and manual purge cycles remove residual water from air channels after use.

## Material

- Acrylic.

## Hydrotherapy

- BubbleMassage™.
- Whirlpool.

## Installation

- Reversible drain.
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain and K-9698 jet trim kit (sold separately).
- Drop-in or undermount.
- Requires 240 V hard-wired electrical service.
- Under-mount installation requires kit K-590 (sold separately).

## Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain  
K-9698 Flexjet® Whirlpool Trim Kit

or

K-7272 PVC Slotted Overflow Bath Drain

## Recommended Products/Accessories

K-1491 Bath/Whirlpool Pillow  
K-1601 Bath/whirlpool footstop, removable  
K-9497 2-1/2" Keypad Trim  
K-9498 3" Keypad Trim  
K-24916 Wireless Music Kit  
K-590 5' under-mount installation kit  
1184460 Undermount installation kit  
K-1177 Vinyl Tiling-in Bead  
K-23726 Drain treatment  
K-23732 Tub & shower cleaner



## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
EPA TSCA Title VI

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description


	0	White
--	---	-------



# Underscore® Rectangle

## 60" x 32" BubbleMassage™ air bath and whirlpool

### K-1168-XH2G

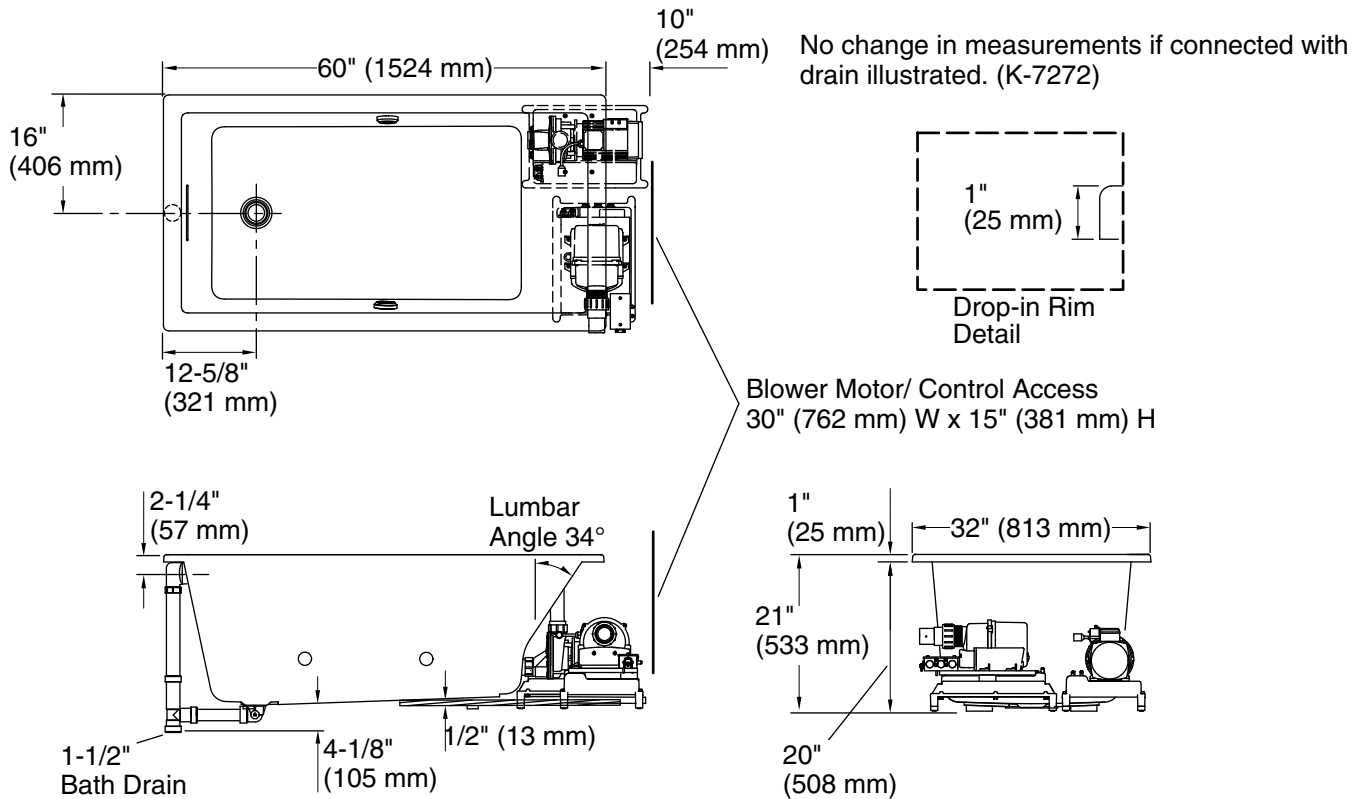

### Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Pump, 220-240 V, 20 A, 50/60 Hz  
Heater:

### Technical Information

All product dimensions are nominal.

Installation: Drop-in, Under-mount  
 Drain location: End  
 Basin area, bottom: 42" x 23-1/2" (1067 mm x 597 mm)  
 Basin area, top: 55-1/8" x 27-1/8" (1400 mm x 689 mm)  
 Weight: 163 lbs (73.9 kg)  
 Minimum floor load: 63.8 lbs/ft² (311.5 kg/m²)  
 Water depth: 17-1/8" (435 mm)  
 Water capacity: 81 gal (306.6 L)  
 Cutout: Drop-in, 59-1/2" x 31-1/2" (1511 mm x 800 mm)  
 Template: Under-mount, K-590, not required, not included  
 Electrical component rating: Blower: 220-240 V, 5 A, 50/60 Hz  
 Pump: 220-240 V, 11 A, 50/60 Hz

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

**IMPORTANT!** Dry fit the drain assembly prior to installing the bath. The bath cannot be installed with all drain components attached.

Kit is required for under-mount installations (sold separately).

The pump base extends 10" (254 mm) beyond the edge of the rim. Modify the framing as needed.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com).

5-29-2021 14:38 - US//CA

