ASSEMBLY AND INSTALLATION INSTRUCTIONS

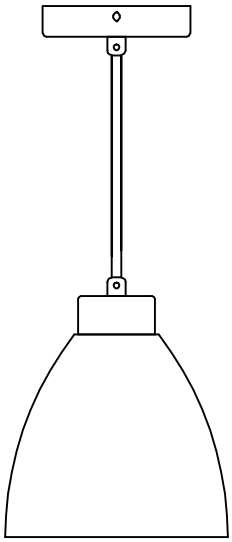
Item No: DD072-1-BN

WARNING:TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTES:


1. Before installing,consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.
4. Min. 90°C supply conductors.consult a qualified electrician to ensure correct branch circuit conductor.

1-LIGHT FLUSH MOUNT





TOOLS REQUIRED



Flathead Screwdriver



Phillips Screwdriver


Ladder


Wire Strippers


Pliers


Electrical Tape


Wire Cutters


Safety Glasses

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product.When the lamp is not installed finish,please don't throw away the package,so as not to leave the parts in the package.

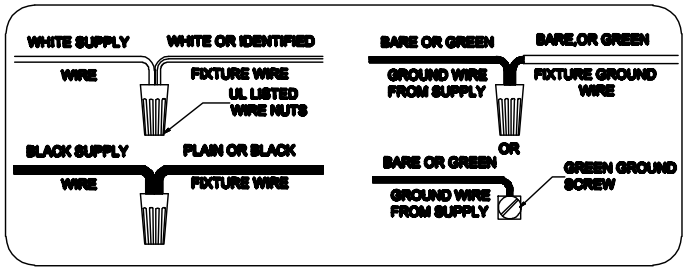
PART LIST AND HARDWARE LIST

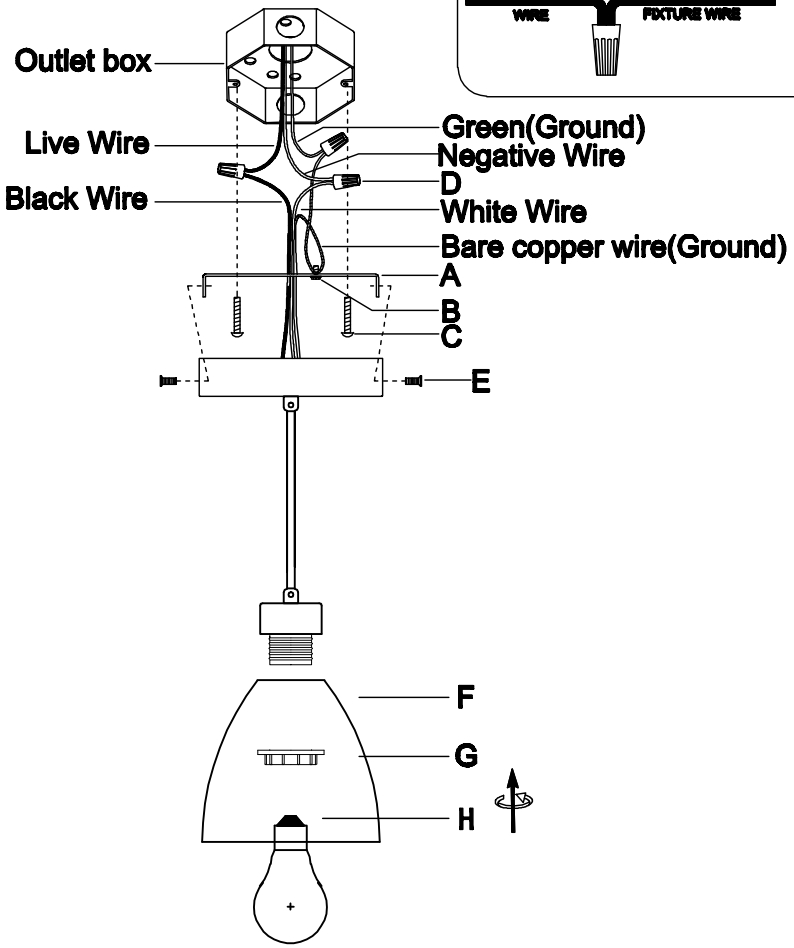
PIECE	DESCRIPTION	QUANTITY
A	Cross bar	1
B	Green ground screw	1
C	Outlex box screw	2
D	Wire nut	3

PIECE	DESCRIPTION	QUANTITY
E	Screw	2
F	Glass	1
G	Fixture body	1

INSTALLATION

1. Attach the cross bar (A) to the junction box with outlex box screw (C) then fix it.
2. Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire,black to (black) and white to (white).
3. Attach the fixture body to the cross bar (A), secure with canopy screw (E)
4. Install the 40W MAX bulb (included) into socket





If you have any issues with use this product, please email us.Be sure include your order number and photos of the issues. This will help us provide you with faster support and solve your problem.

lighting_service@outlook.com