

LED Portable Undercabinet Light



Specifications:

Description:

120V LED Undercabinet Light provides versatile lighting in line voltage.
Frosted glass diffuser eliminates glare for task and accent lighting applications.
Available in five different sizes and three different finishes. 5' power cord included.
Portable or hardwired, linkable

Features:

- Metal housing, frosted glass diffuser
- On/Off switch with high/low setting
- 120V, no external driver required


Performance:

Input Power	5W / 7W / 9W / 13W / 16W
Input Voltage	120V
Input Frequency	60Hz
Lumens	470 / 660 / 850 / 1200 / 1500
CCT	3500K
CRI	80+
LPW	76
Life Hour	40,000 hrs
Warranty	5 years Limited
Dimension	12"x3.5"x1", 21"x3.5"x1", 24"x3.5"x1", 33"x3.5"x1", 42"x3.5"x1"
Certification	cETLus Classified
Accessories	Dia. 0.15" x 0.63" L Screw x 2 for LEDUC12P/21P, Dia. 0.15" x 0.63" L Screw x 3 for LEDUC33P/42P

Catalog Number:

Base	Watt	Lumens	Finish	Dimension
LEDUC12WHT	5W	470	White	12"x3.5"x1"
LEDUC12BZ	5W	470	Bronze	12"x3.5"x1"
LEDUC12NKL	5W	470	Nickel	12"x3.5"x1"
LEDUC21WHT	7W	660	White	21"x3.5"x1"
LEDUC21BZ	7W	660	Bronze	21"x3.5"x1"
LEDUC21NKL	7W	660	Nickel	21"x3.5"x1"
LEDUC24WHT	9W	850	White	24"x3.5"x1"
LEDUC24BZ	9W	850	Bronze	24"x3.5"x1"
LEDUC24NKL	9W	850	Nickel	24"x3.5"x1"
LEDUC33WHT	13W	1200	White	33"x3.5"x1"
LEDUC33BZ	13W	1200	Bronze	33"x3.5"x1"
LEDUC33NKL	13W	1200	Nickel	33"x3.5"x1"
LEDUC42WHT	16W	1500	White	42"x3.5"x1"
LEDUC42BZ	16W	1500	Bronze	42"x3.5"x1"
LEDUC42NKL	16W	1500	Nickel	42"x3.5"x1"

Image:

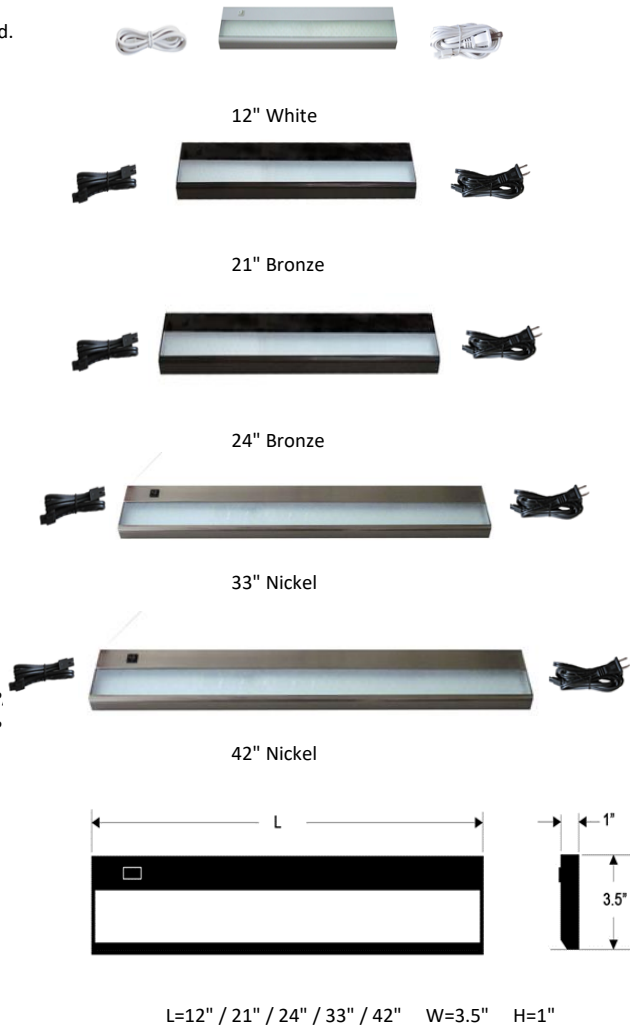

Electrical Data:

Input Voltage	120V
Input Frequency	60Hz
Power Factor	≥0.90



Amax Lighting, Inc.

10268 Santa Fe Springs Road, Santa Fe Springs, CA 90670

Tel: 562-945-5221 Fax: 562-464-1664

www.amaxlighting.com