
Meaning of LED Lights

State of LED Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the cover of the power supply on the back of the mirror to test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables)
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.

RGB LED Bathroom Mirror



Before Installation

Please Note Before Installation:

- 1. Please read all instructions carefully before assembling the item.
- 2. After opening the package, first check if there is transit damage or missing parts.
- 3. Please power the mirror with plug to test the mirror and each functions before installation.
- 4. Assembly by two or more adults is highly recommended.
- 5. Disconnect power before installing, adding or changing any components.
- 6. Ensure that the fixing location is able to take the weight of the complete fittng.
- 7. Keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.
- 8. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.
- 9. Before cleaning the mirror, make sure that the power supply is disconnected.


Please Notes:

Due to the workmanship production process of the items, the size error does not exceed 1-2 inches.


Specifications and Parameters

Product No.	Size	Thickness	Touch Button	LED Stripe Model	Color Temperature	Lumen	CRI	Power(W)	Input Voltage (V)	Weight (kg)
	20"x28"	1.5″	3	5050-60-RGB	RGB	3409	90	60	100-120V	5.55
	24"x32"	1.5″	3	5050-60-RGB	RGB	4161	90	75	100-120V	7.10
	24"x36"	1.5″	3	5050-60-RGB	RGB	4586	90	75	100-120V	7.80
	28"x36"	1.5″	3	5050-60-RGB	RGB	4962	90	100	100-120V	8.55
	30"x36"	1.5″	3	5050-60-RGB	RGB	5200	90	90	100-120V	8.75
	32"x32"	1.5″	3	5050-60-RGB	RGB	5007	90	90	100-120V	8.55
	36"x36"	1.5″	3	5050-60-RGB	RGB	5666	90	100	100-120V	10.95
	38"x38"	1.5″	3	5050-60-RGB	RGB	6135	90	100	100-120V	12.28
	40"x24"	1.5″	3	5050-60-RGB	RGB	4962	90	100	100-120V	8.60
	40"x28"	1.5″	3	5050-60-RGB	RGB	5327	90	90	100-120V	9.58
	40"x30"	1.5″	3	5050-60-RGB	RGB	5543	90	90	100-120V	10.16
	40"x32"	1.5″	3	5050-60-RGB	RGB	5666	90	100	100-120V	10.95
	40"x36"	1.5″	3	5050-60-RGB	RGB	6113	90	100	100-120V	11.90
	48"x32"	1.5″	3	5050-60-RGB	RGB	6466	90	150	100-120V	15.20
	48"x30"	1.5″	3	5050-60-RGB	RGB	6343	90	150	100-120V	16.07
	48"x36"	1.5″	3	5050-60-RGB	RGB	6926	90	150	100-120V	17.15
	48"x40"	1.5″	3	5050-60-RGB	RGB	7015	90	150	100-120V	20.95
	55"x30"	1.5″	3	5050-60-RGB	RGB	7002	90	150	100-120V	16.40
	55"x36"	1.5″	3	5050-60-RGB	RGB	7589	90	150	100-120V	18.63
	60"x28"	1.5″	3	5050-60-RGB	RGB	7170	90	150	100-120V	16.55
	60"x30"	1.5″	3	5050-60-RGB	RGB	5311	90	150	100-120V	17.48
	60"x36"	1.5″	3	5050-60-RGB	RGB	7923	90	150	100-120V	20.45
	72"x32"	1.5″	3	5050-60-RGB	RGB	8793	90	150	100-120V	22.30
	72"x36"	1.5″	3	5050-60-RGB	RGB	9087	90	150	100-120V	24.70
	72"x40"	1.5″	3	5050-60-RGB	RGB	9512	90	150	100-120V	27.11
	77"x36"	1.5″	3	5050-60-RGB	RGB	9686	90	150	100-120V	26.42
	84"x32"	1.5″	3	5050-60-RGB	RGB	9922	90	150	100-120V	25.80
	84"x40"	1.5″	3	5050-60-RGB	RGB	10677	90	150	100-120V	30.32
	88"x38"	1.5″	3	5050-60-RGB	RGB	10893	90	150	100-120V	31.03
	96"x36"	1.5″	3	5050-60-RGB	RGB	11384	90	200	100-120V	32.05

Installation Instruction

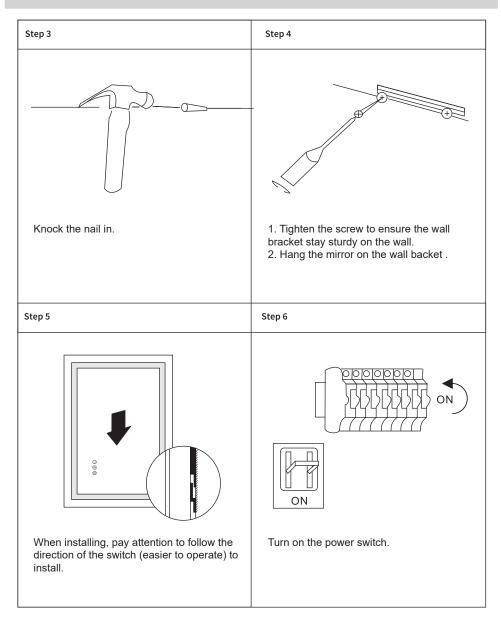

Check Functions



Before installation, please check to make sure these functions work properly:

Anti-fog Switch:

1. After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after its turned on , so you can turn it on 10 minutes before taking a bath.

2.Auto off after 1 hour.

Front Light Dim Switch:

1.Sh light

(¥)

1.Short press this button to change the color temperature among cold light, white light, warm light and turn on/off the light.

2.Long press this button to adjust the brightness of the light. Dimmable range 20%-100%.


RGB Backlight Dimming:




1. Short press this button to change the color among colorful, cold light, white light, warm light, pink, red, green, blue.

2. Long press this button to adjust the brightness of the light.


User Manual

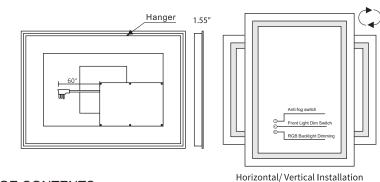

PACKAGE CONTENTS

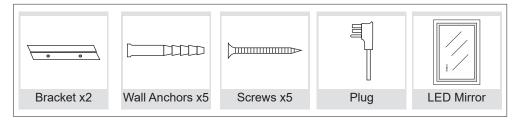

YOU MAY NEED THESE TOOLS

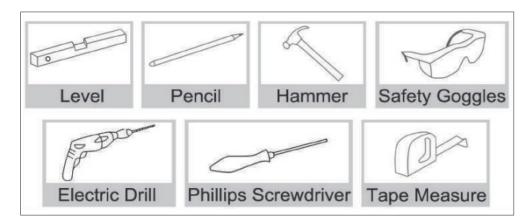

Installation Instruction

