


# MT-4LD116 - 1 Light

## 4" LED Precision Modules Energy Star®

**WAC LIGHTING**  
Responsible Lighting®

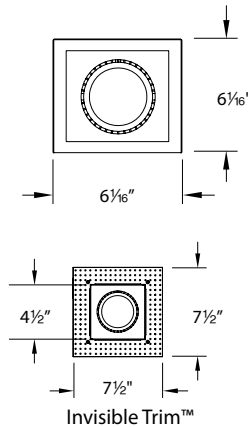

### PRODUCT DESCRIPTION

Retractable spot lights adjustable up to 90° from vertical

### FEATURES

- Energy Star® rated
- Non-IC rated housings\*
- Invisible Trim™ is designed to sit flush with the ceiling for a clean, architectural look
- Spot and Flood beam spreads
- 90° vertical adjustment and 350° horizontal rotation
- Accepts one replacement lens
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

### FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Watts	Lumens	Efficacy	CRI
MT-4LD116N-S927	20°	2700K	16W	736	46 Lm/W	90
MT-4LD116N-S927	40°			724	45 Lm/W	
MT-4LD116N-S27	20°	2700K	16W	920	58 Lm/W	85
MT-4LD116N-F27	40°			905	57 Lm/W	
MT-4LD116N-S930	20°	3000K	16W	768	48 Lm/W	90
MT-4LD116N-F930	40°			752	47 Lm/W	
MT-4LD116N-S30	20°	3000K	16W	960	60 Lm/W	85
MT-4LD116N-F30	40°			940	59 Lm/W	
MT-4LD116N-S35	20°	3500K	16W	975	61 Lm/W	85
MT-4LD116N-F35	40°			960	60 Lm/W	
MT-4LD116N-S40	20°	4000K	16W	1100	69 Lm/W	85
MT-4LD116N-F40	40°			1080	68 Lm/W	

### HOUSING ORDER NUMBER

Model #	Beam	Color Temp	Rated	Finish
MT-4LD116N	S 20° F 40°	<b>927</b> 2700K (90 CRI)	Non-IC	<b>BK</b> Black
		<b>27</b> 2700K		
		<b>930</b> 3000K (90 CRI)		
		<b>30</b> 3000K		
		<b>35</b> 3500K		
		<b>40</b> 4000K		

**MT-4LD116N** -  -  - **BK**

Example: MT-4LD116N-S27-BK

WAC Lighting  
www.waclighting.com  
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive • Port Washington, NY 11050  
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center  
1750 Archibald Avenue • Ontario, CA 91760  
Phone (800) 526.2588 • Fax (800) 526.2585

Fixture Type:

Catalog Number:

Project:

Location:

### SPECIFICATIONS

**Construction:** Die-cast aluminum heat sink painted black. Trim, housing and junction box are 20 gauge steel. Frame and hanger bars are heavy gauge galvanized steel.

**J-Box:** Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch wiring.

**Driver:** Universal (120V - 277V)

**Light Source:** High output LED (included with housing)

**Dimming:** 0-10V dimmer. Dim from 100%-10%


**Mounting:** Supplied with hanger bars, adjustable from 14 1/2"-24 1/2" to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for ease of installation. Accommodates surface up to 1" thick. 5 1/8" x 5 1/8" cutout with trim, 5 1/8" x 5 1/8" cutout for Invisible Trim™. See instruction sheet for details on installation using spackle ring.

**Finish:** Abrasion resistant powder coat paint in Black (BK).

**Standards:** ETL & cETL listed.

### Lenses

Lenses	Color
<b>LENS-16</b> Colored Lens	<b>AMB</b> Amber
	<b>BLU</b> Blue
	<b>GRN</b> Green
	<b>RED</b> Red
	<b>YEL</b> Yellow
<b>LENS-16-UVF</b> UV Filter Lens	
<b>LENS-16-FR</b> Frosted Lens	
<b>LENS-16-SPR</b> Spread Lens	
<b>LENS-16-BEL</b> Beam Elongating Lens	

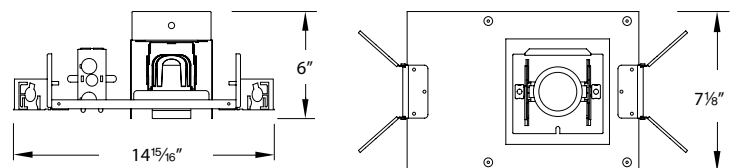

### TRIM ORDER NUMBER

Trim

**MT-4LD116T-WT**

Invisible Trim™

**MT-4LD116TL-WT**