



# Underscore® | K-1849-GHW

60" x 36" drop-in Heated BubbleMassage™ air bath with Bask® heated surface

## Features

- 122 airjets release thousands of heated bubbles that surround, support, and massage the body
- Variable-speed blower lets you adjust massage intensity to 18 levels
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Built-in heater
- Automatic and manual purge cycles remove residual water from air channels after use
- 60-minute automatic shutoff timer
- Slotted overflow allows for deep soaking
- Integral lumbar support
- Keypad control
- Textured bottom surface
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck



## Available Colors/Finishes

*Color tiles intended for reference only.*

|    |             |
|----|-------------|
| 0  | White       |
| 96 | Biscuit     |
| 95 | Ice Grey    |
| 7  | Black Black |



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-30-2026 01:55 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
 CSA B45.5/IAPMO Z124  
 ASTM E162  
 ASTM E662  
 UL 1795  
 CSA C22.2 No. 218.2  
 cUL Listed  
 UL Listed

## Technical Information

*All product dimensions are nominal.*

|                        |                                               |
|------------------------|-----------------------------------------------|
| Drain Location:        | Reversible                                    |
| Drain Hole Diameter:   | 2-3/16" (56 mm)                               |
| Minimum Flat for Door: | 2-3/8" (61 mm)                                |
| Basin Area, Bottom:    | 39-9/16" x 24-3/4" (1005 mm x 628 mm)         |
| Basin Area, Top:       | 53-5/8" x 29-1/2" (1362 mm x 750 mm)          |
| Water Depth:           | 17-1/8" (435 mm)                              |
| Water Capacity:        | 81.1 gal (307 L)                              |
| Minimum Floor Load:    | 54 lbs/ft²                                    |
| Weight:                | 106 lbs (48.1 kg)                             |
| Cutout:                | Drop-in, 59-1/2" x 35-1/2" (1511 mm x 902 mm) |

## Material

- Acrylic

## Recommended Products/Accessories

K-1491 Bath/whirlpool pillow, removable  
 K-1601 Bath/whirlpool footstop, removable  
 K-1177 Tiling-in bead, 144" length  
 K-534 Undermount kit for select 60" Underscore bath models  
 K-706000-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass  
 K-706000-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass  
 K-706003-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass  
 K-706004-D3 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Frosted glass  
 K-706004-L 56-5/8"-59-5/8" W x 62" H bypass bath door with 1/4"-thick Crystal Clear glass  
 K-706007-L 56-5/8"-59-5/8" W x 62" H sliding bath door with 3/8"-thick Crystal Clear glass

## Required Products/Accessories

- K-7271 Slotted overflow brass bath drain
- or
- K-7272 Slotted overflow bath drain

## Technology

- Heated BubbleMassage™ technology warms and humidifies air before it enters the bath



## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Blower, Heated surface: 120 V, 15 A, 60 Hz

Heater: 120 V, 15 A, 60 Hz

## Electrical Component Ratings

Blower: 120 V, 10 A

Heated surface: 120 V, 0.5 A, 60 Hz, 65 W


Heater: 120 V, 5 A, 60 Hz

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited  
Warranty|KOHLER® Hydrotherapy Components Five-Year  
Limited Warranty



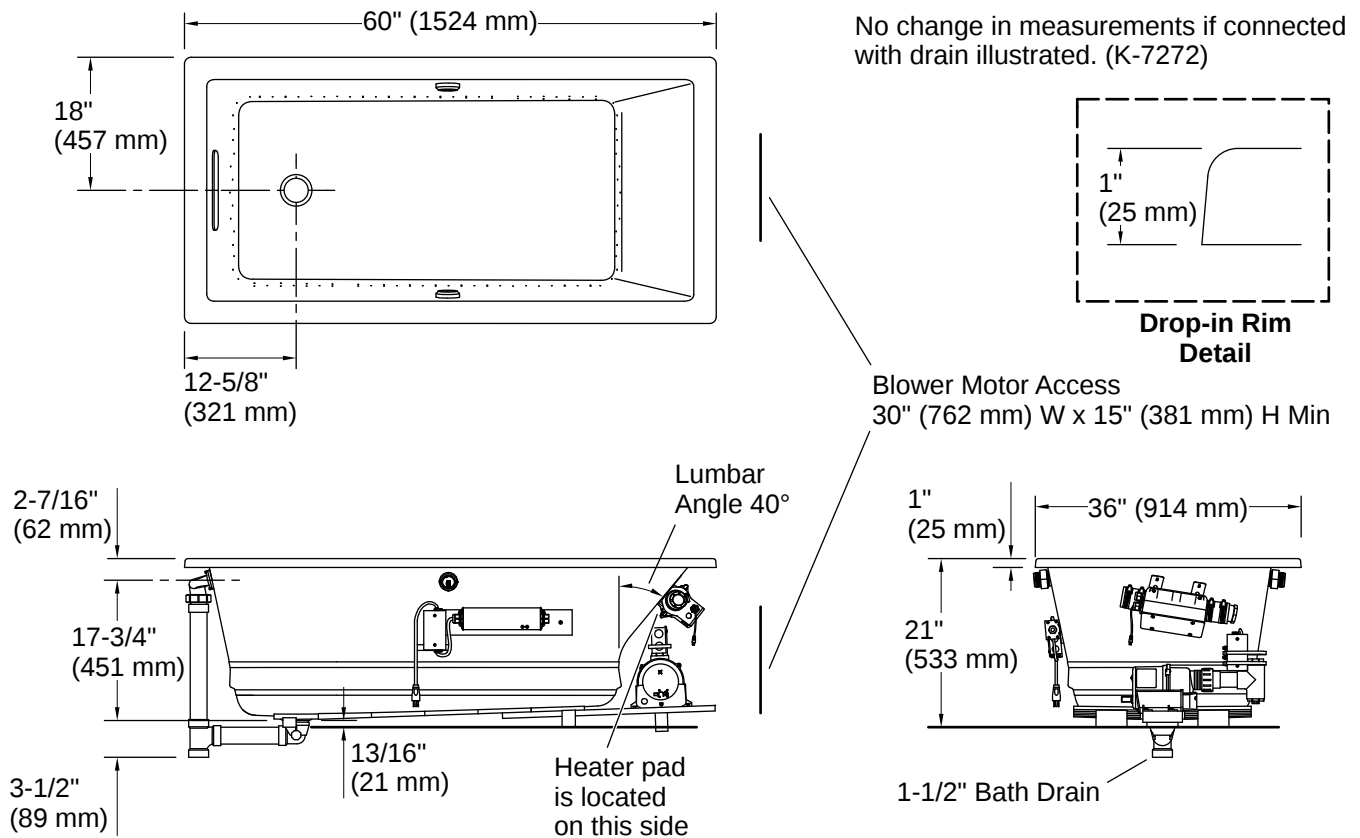

## Installation

- Drop-in or undermount
- Reversible drain
- 120 V electrical requirement allows for easy installation with standard outlet
- Requires two dedicated circuits
- Requires Clearflo slotted overflow bath drain (sold separately)

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.  
The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

