


Installation Instructions

V1.0

Available for various colors

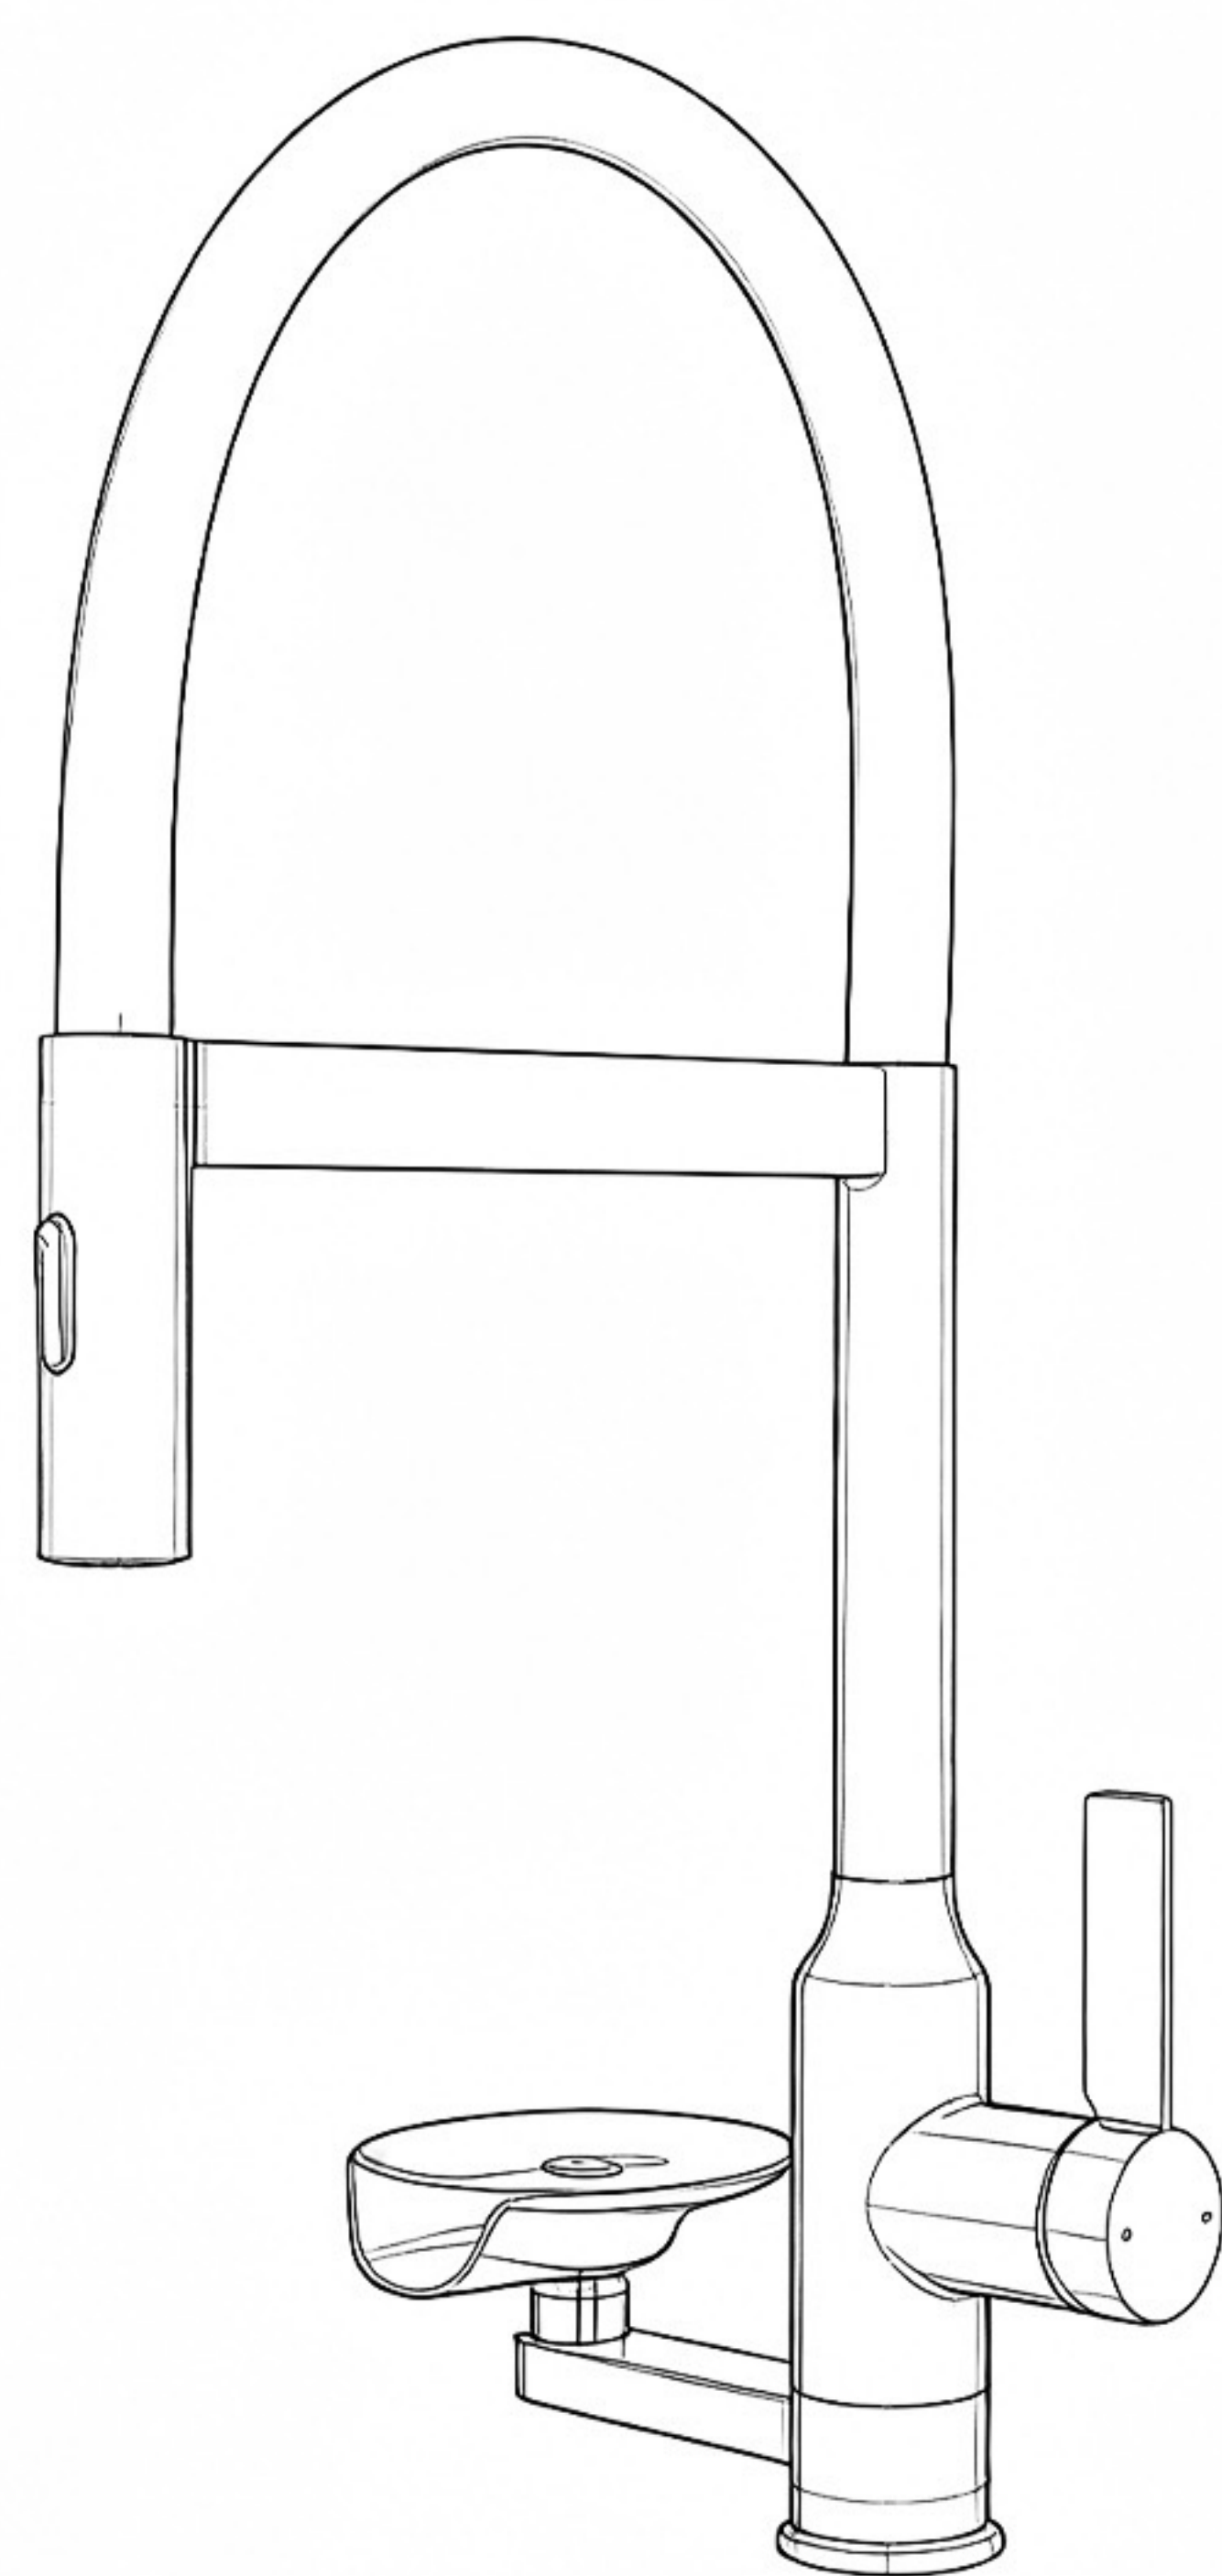

Note

- 1. The sprayer head button activates once water flows through.
- 2. The sprayer head can retract properly once the weight is attached.
- 3. Before installing the new faucet, flush any contaminants from your supply lines for 30–60 seconds until the water runs clean.



x1




x1



x1


For safety and ease of faucet installation, recommends using these helpful tools.

Step 1

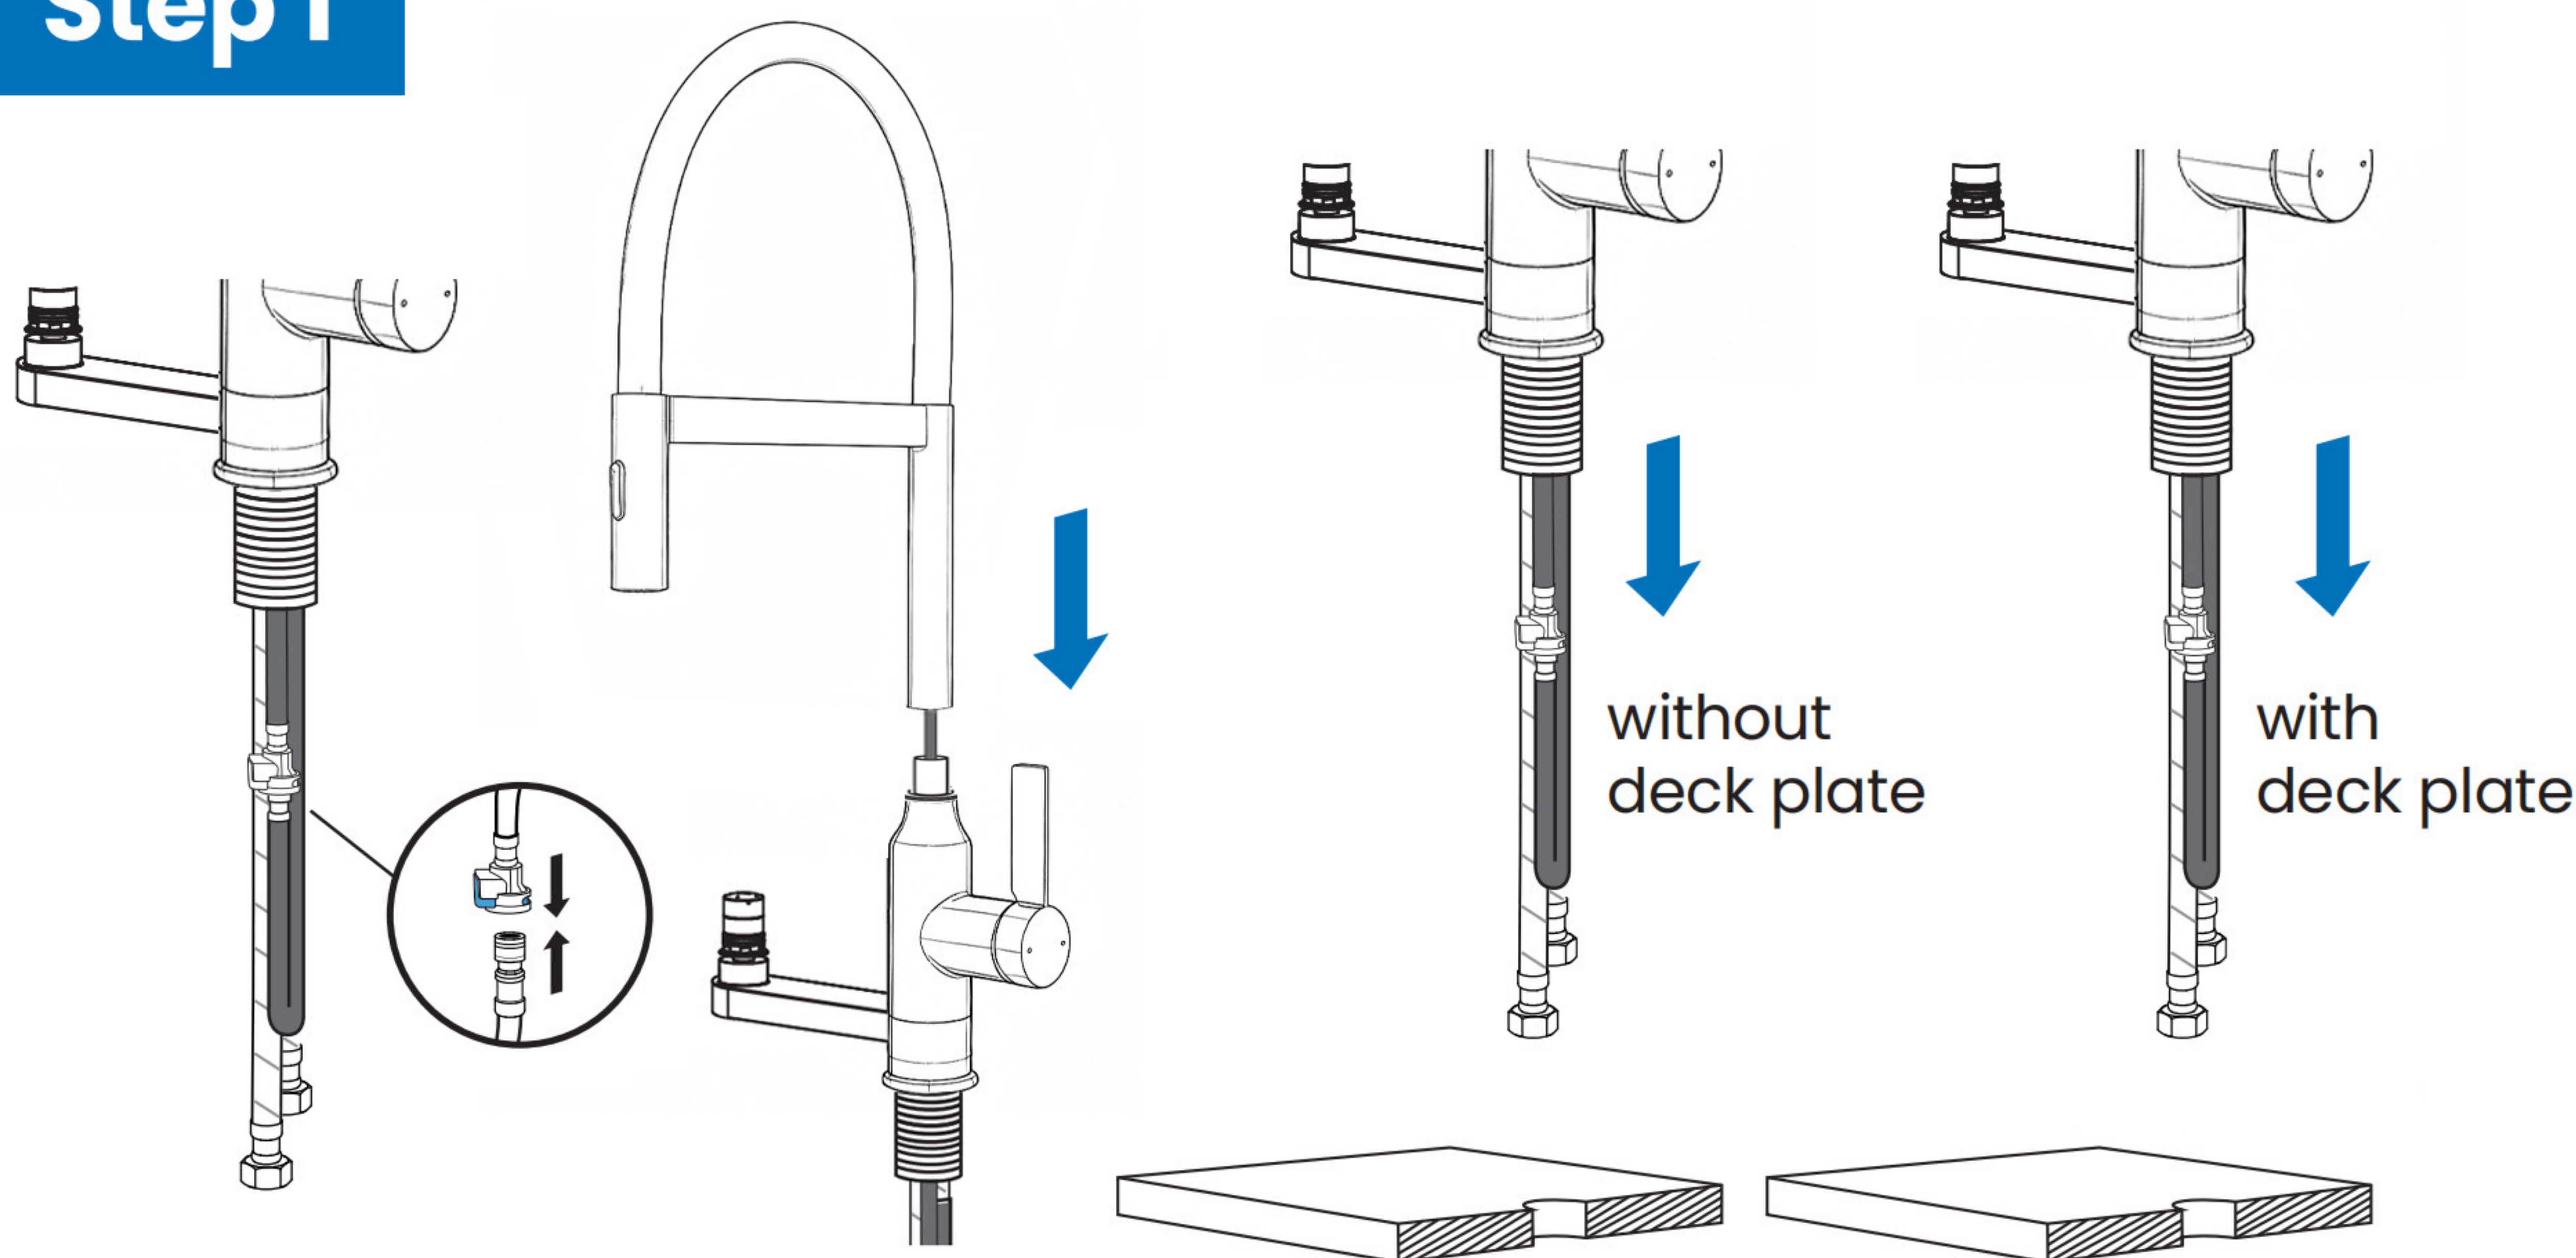


1. Lock the quick-conector and attach the goose neck to the faucet base. Insert the faucet into the countertop. If you have a three-hole countertop, use the center hole. The white foam inside the deck plate helps prevent water from leaking through. Do not remove it.

Step 2

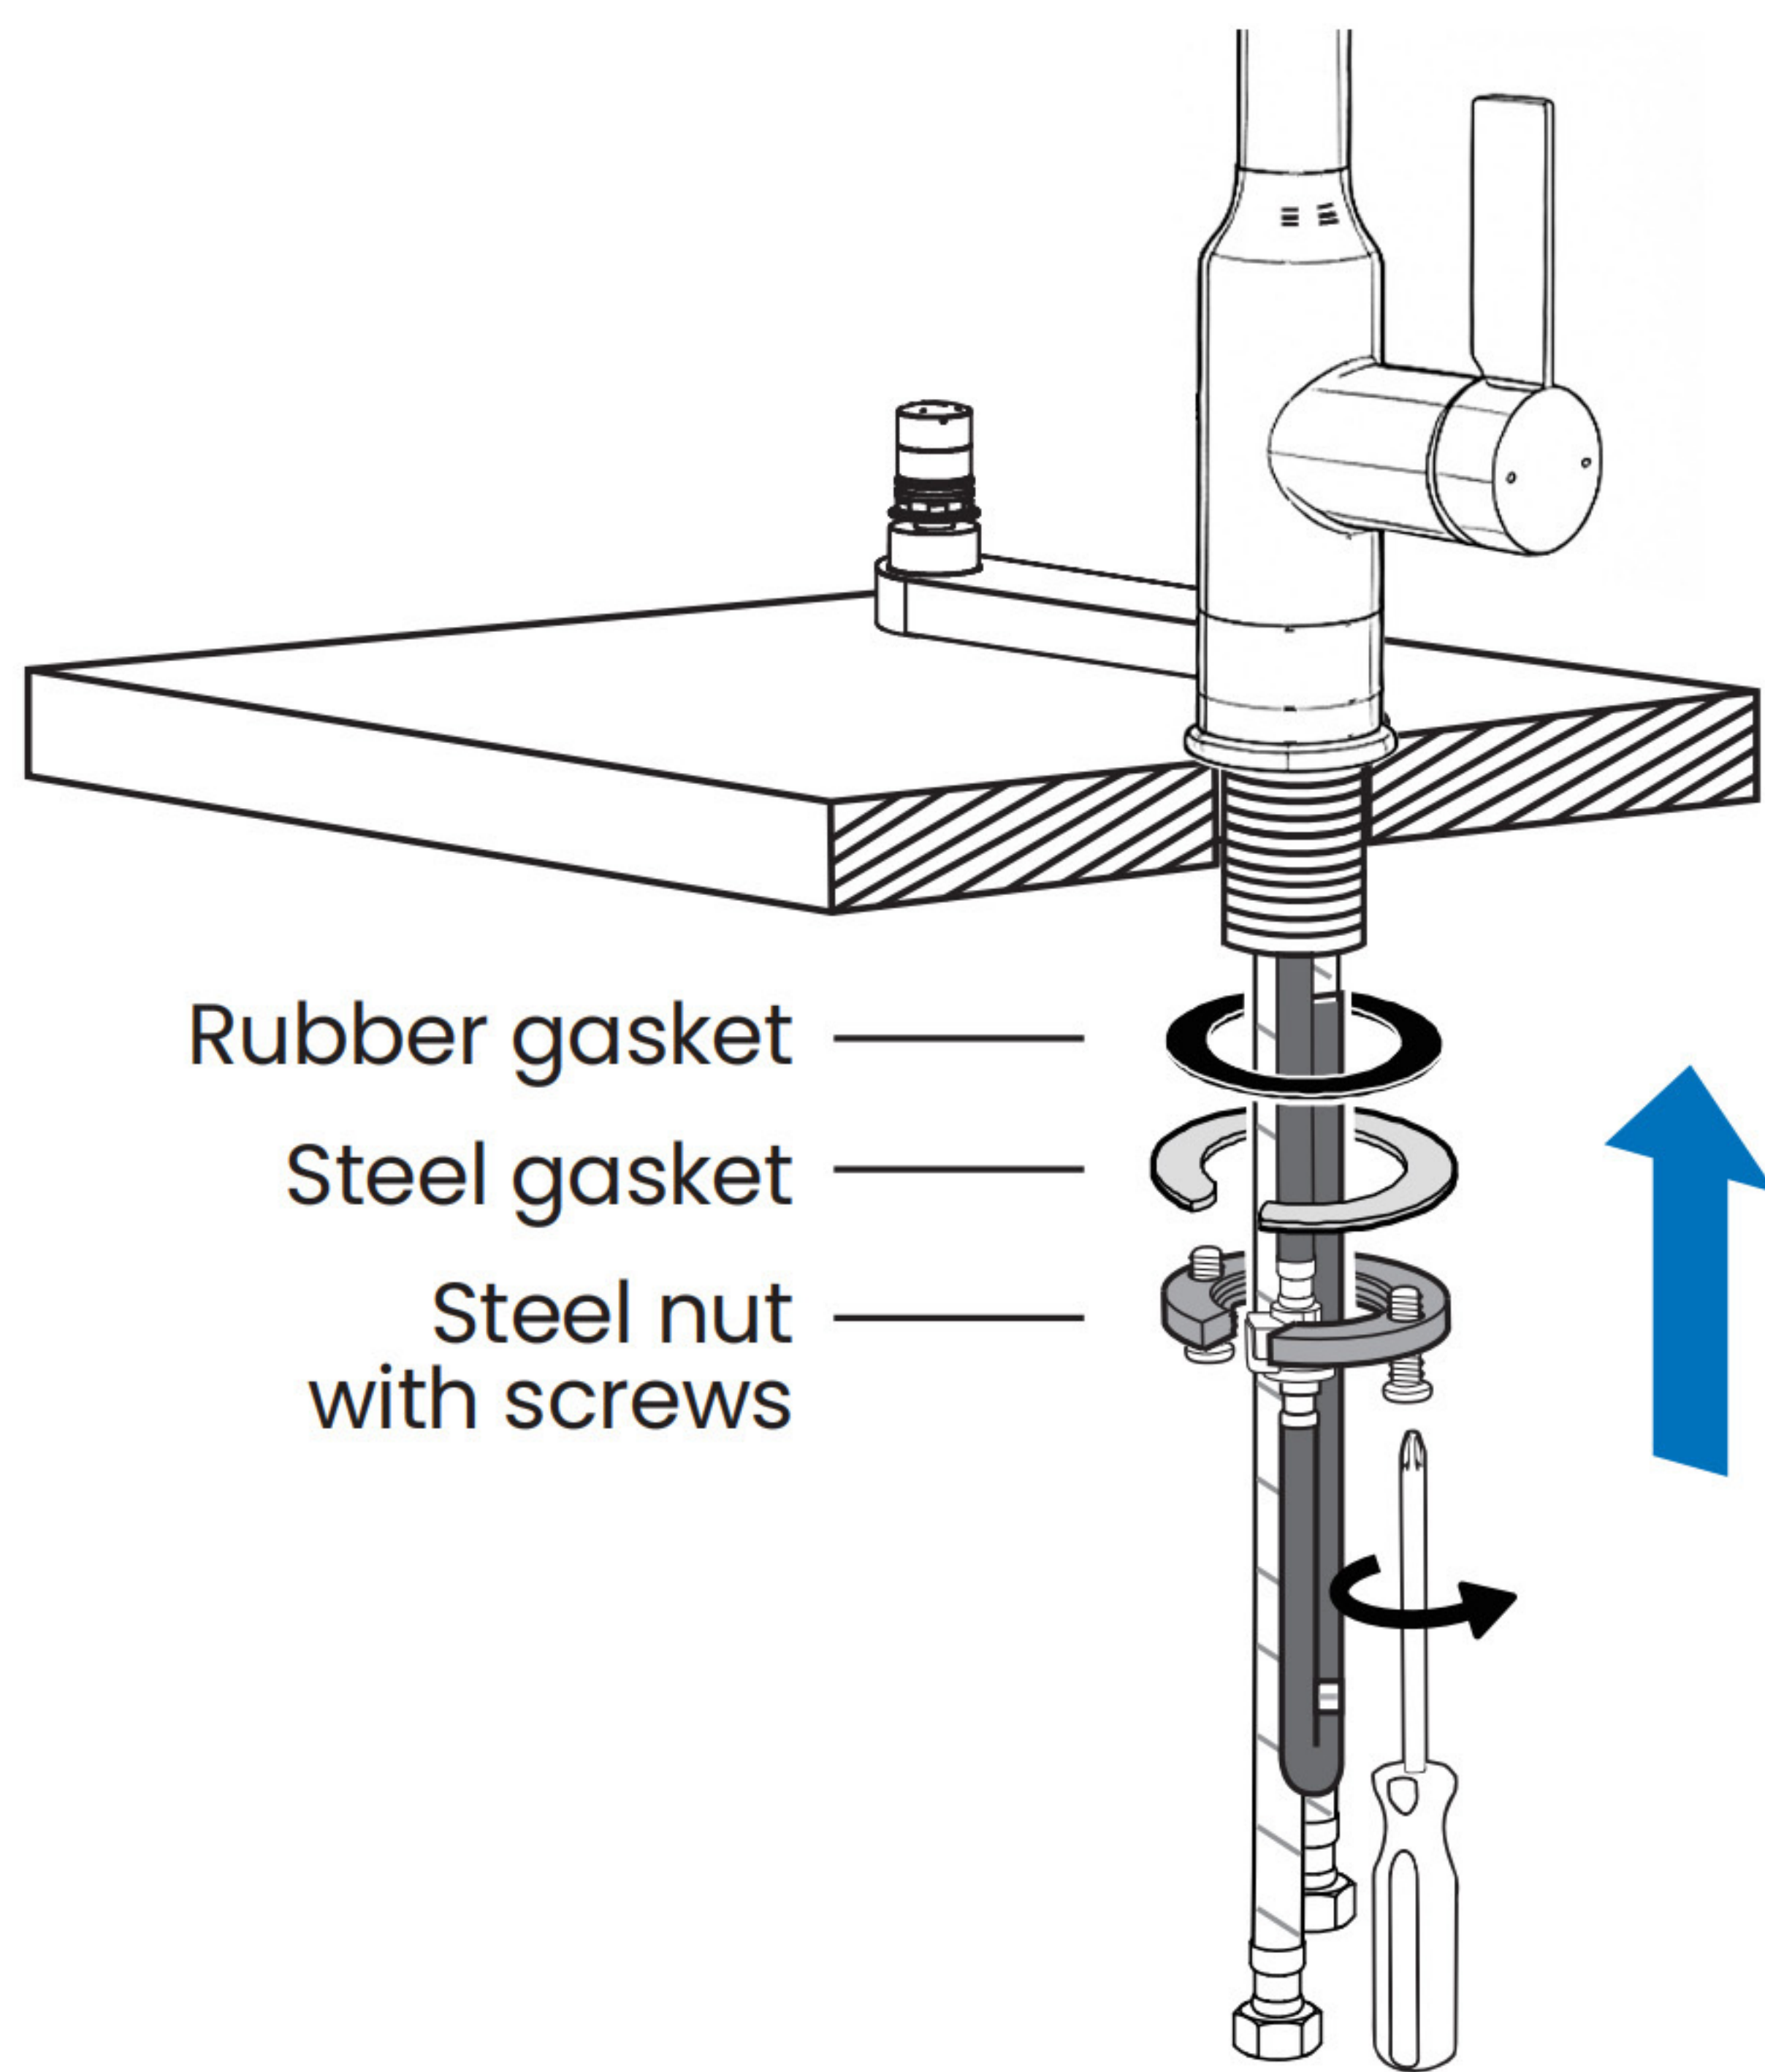


2. Install the rubber gasket, steel gasket, and steel nut in sequence. Push the steel nut upward, then tighten the screws with a screwdriver.

Step 3

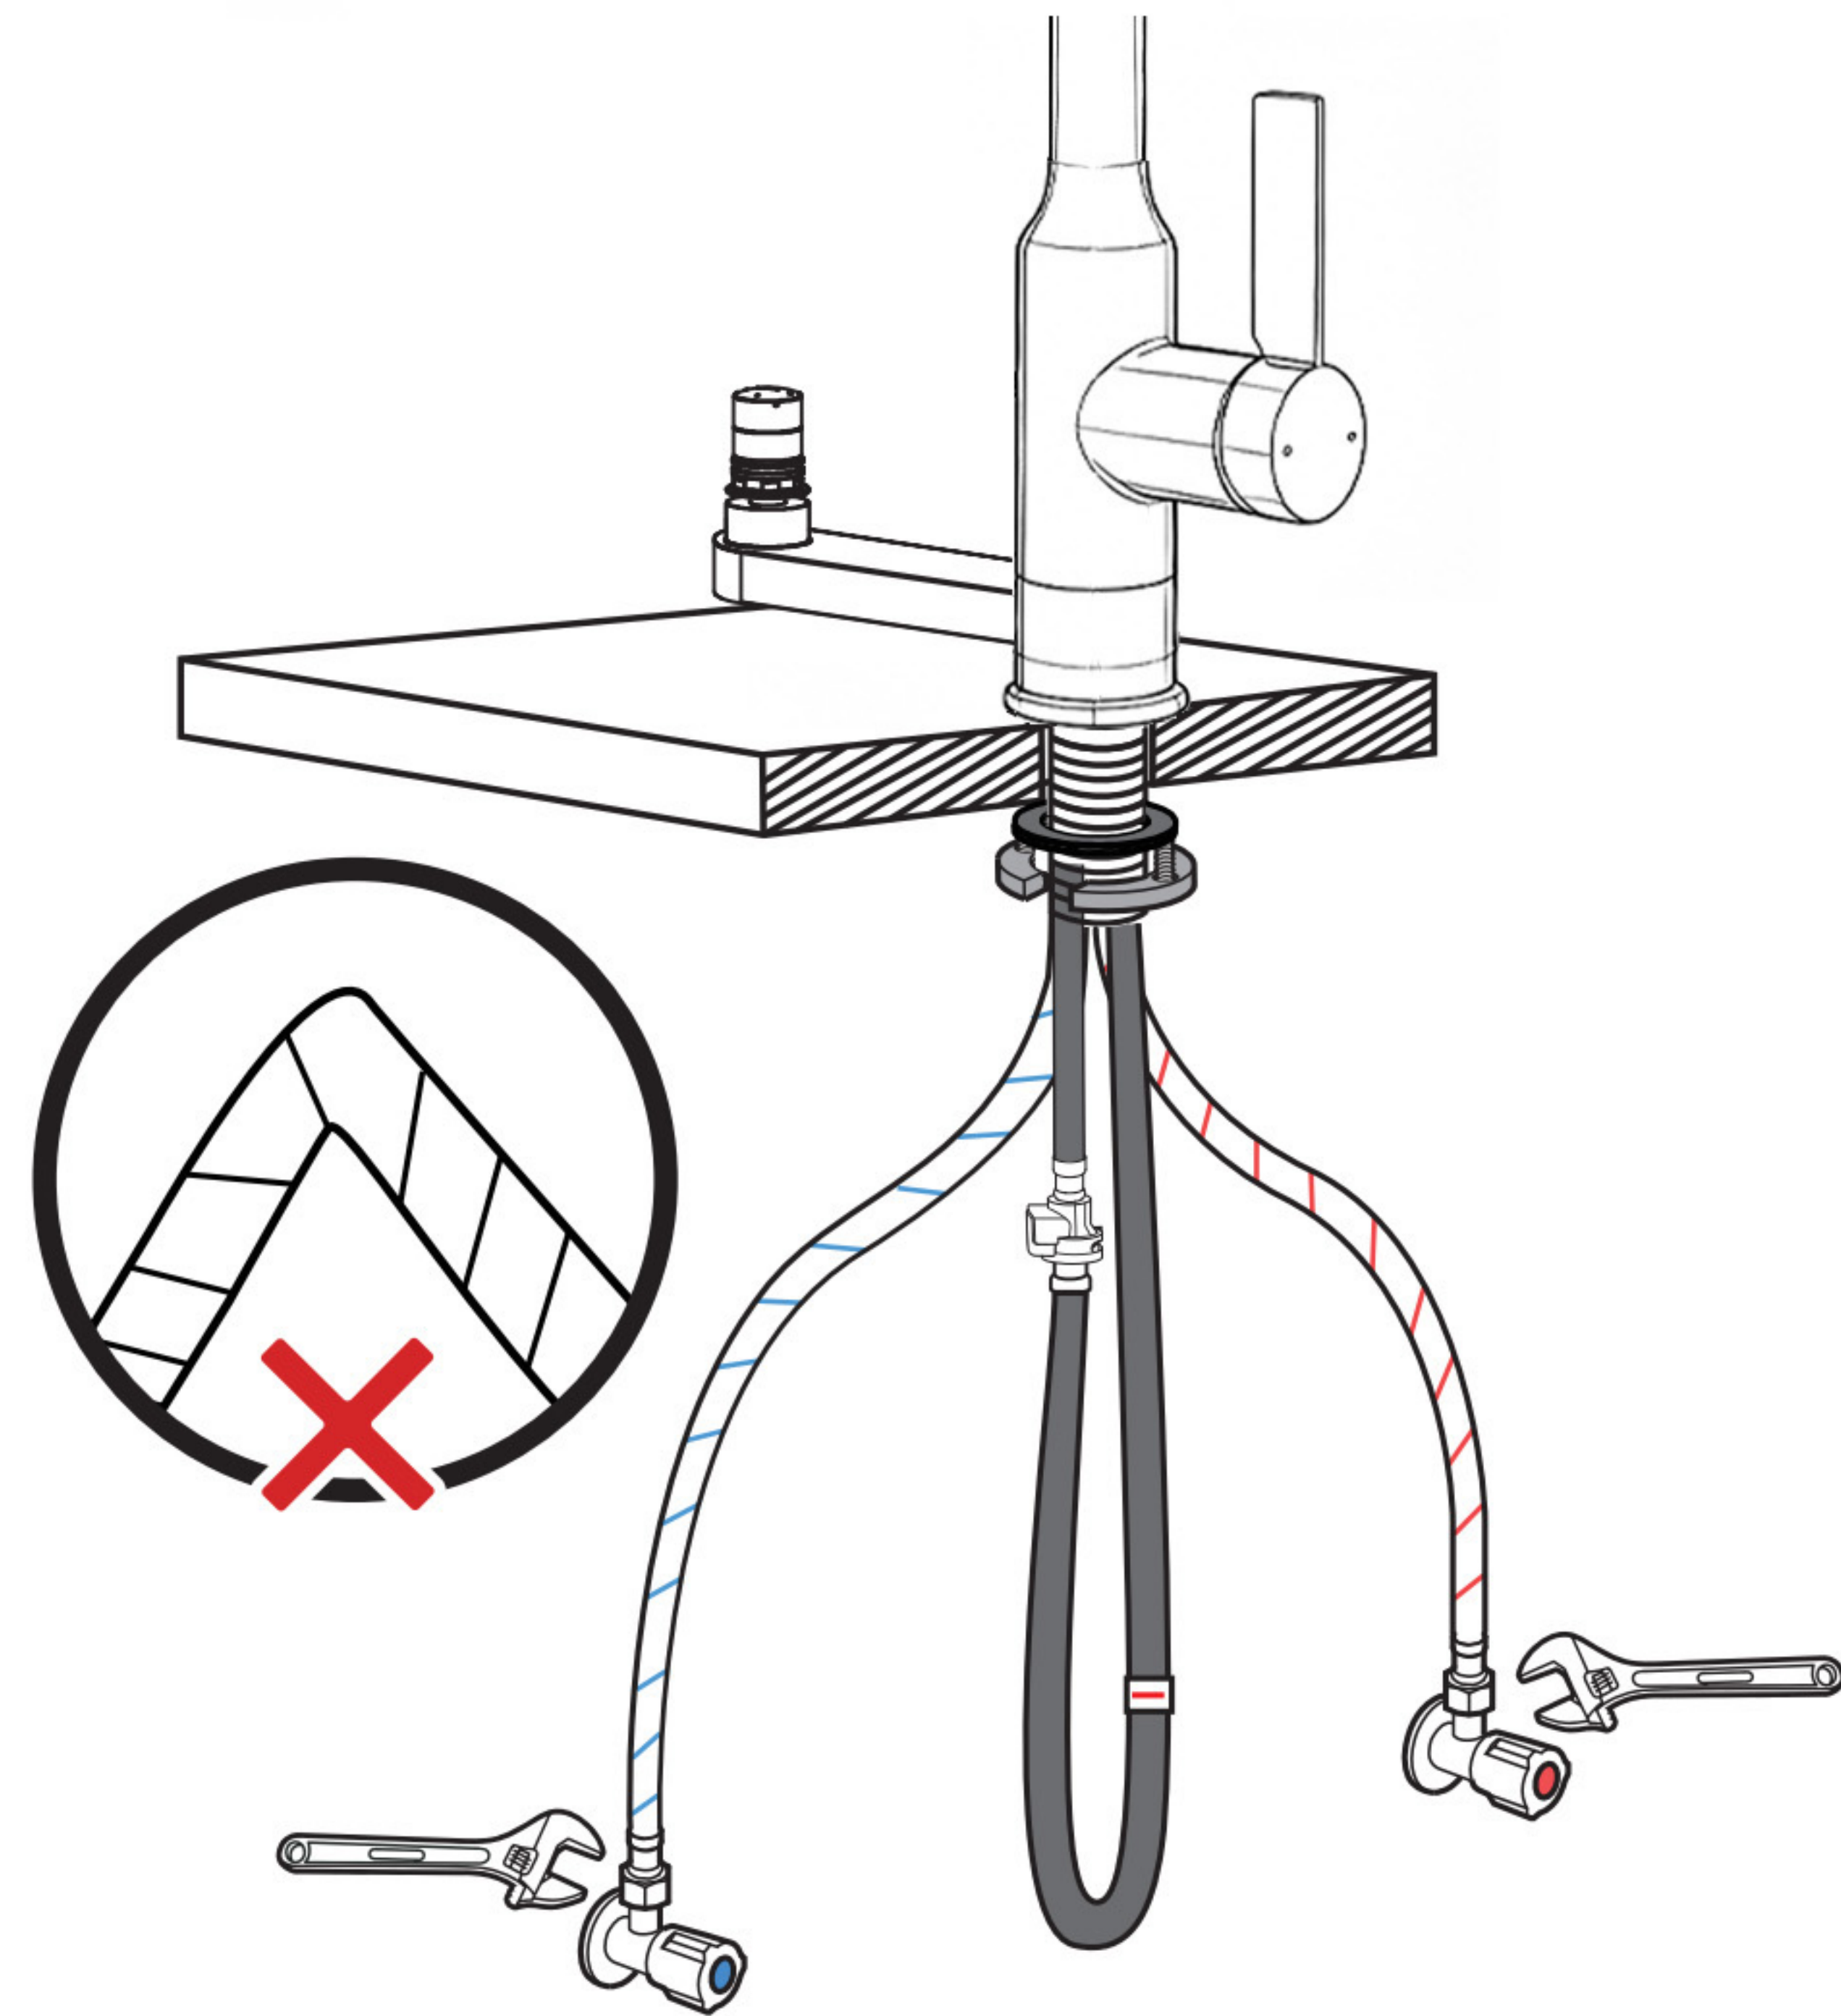



3. Use a wrench to connect the hot and cold water hoses to the supply valves. Do not over-tighten. There are washers inside the hoses, so there is no need to use Teflon tape for the connections.

Step 4

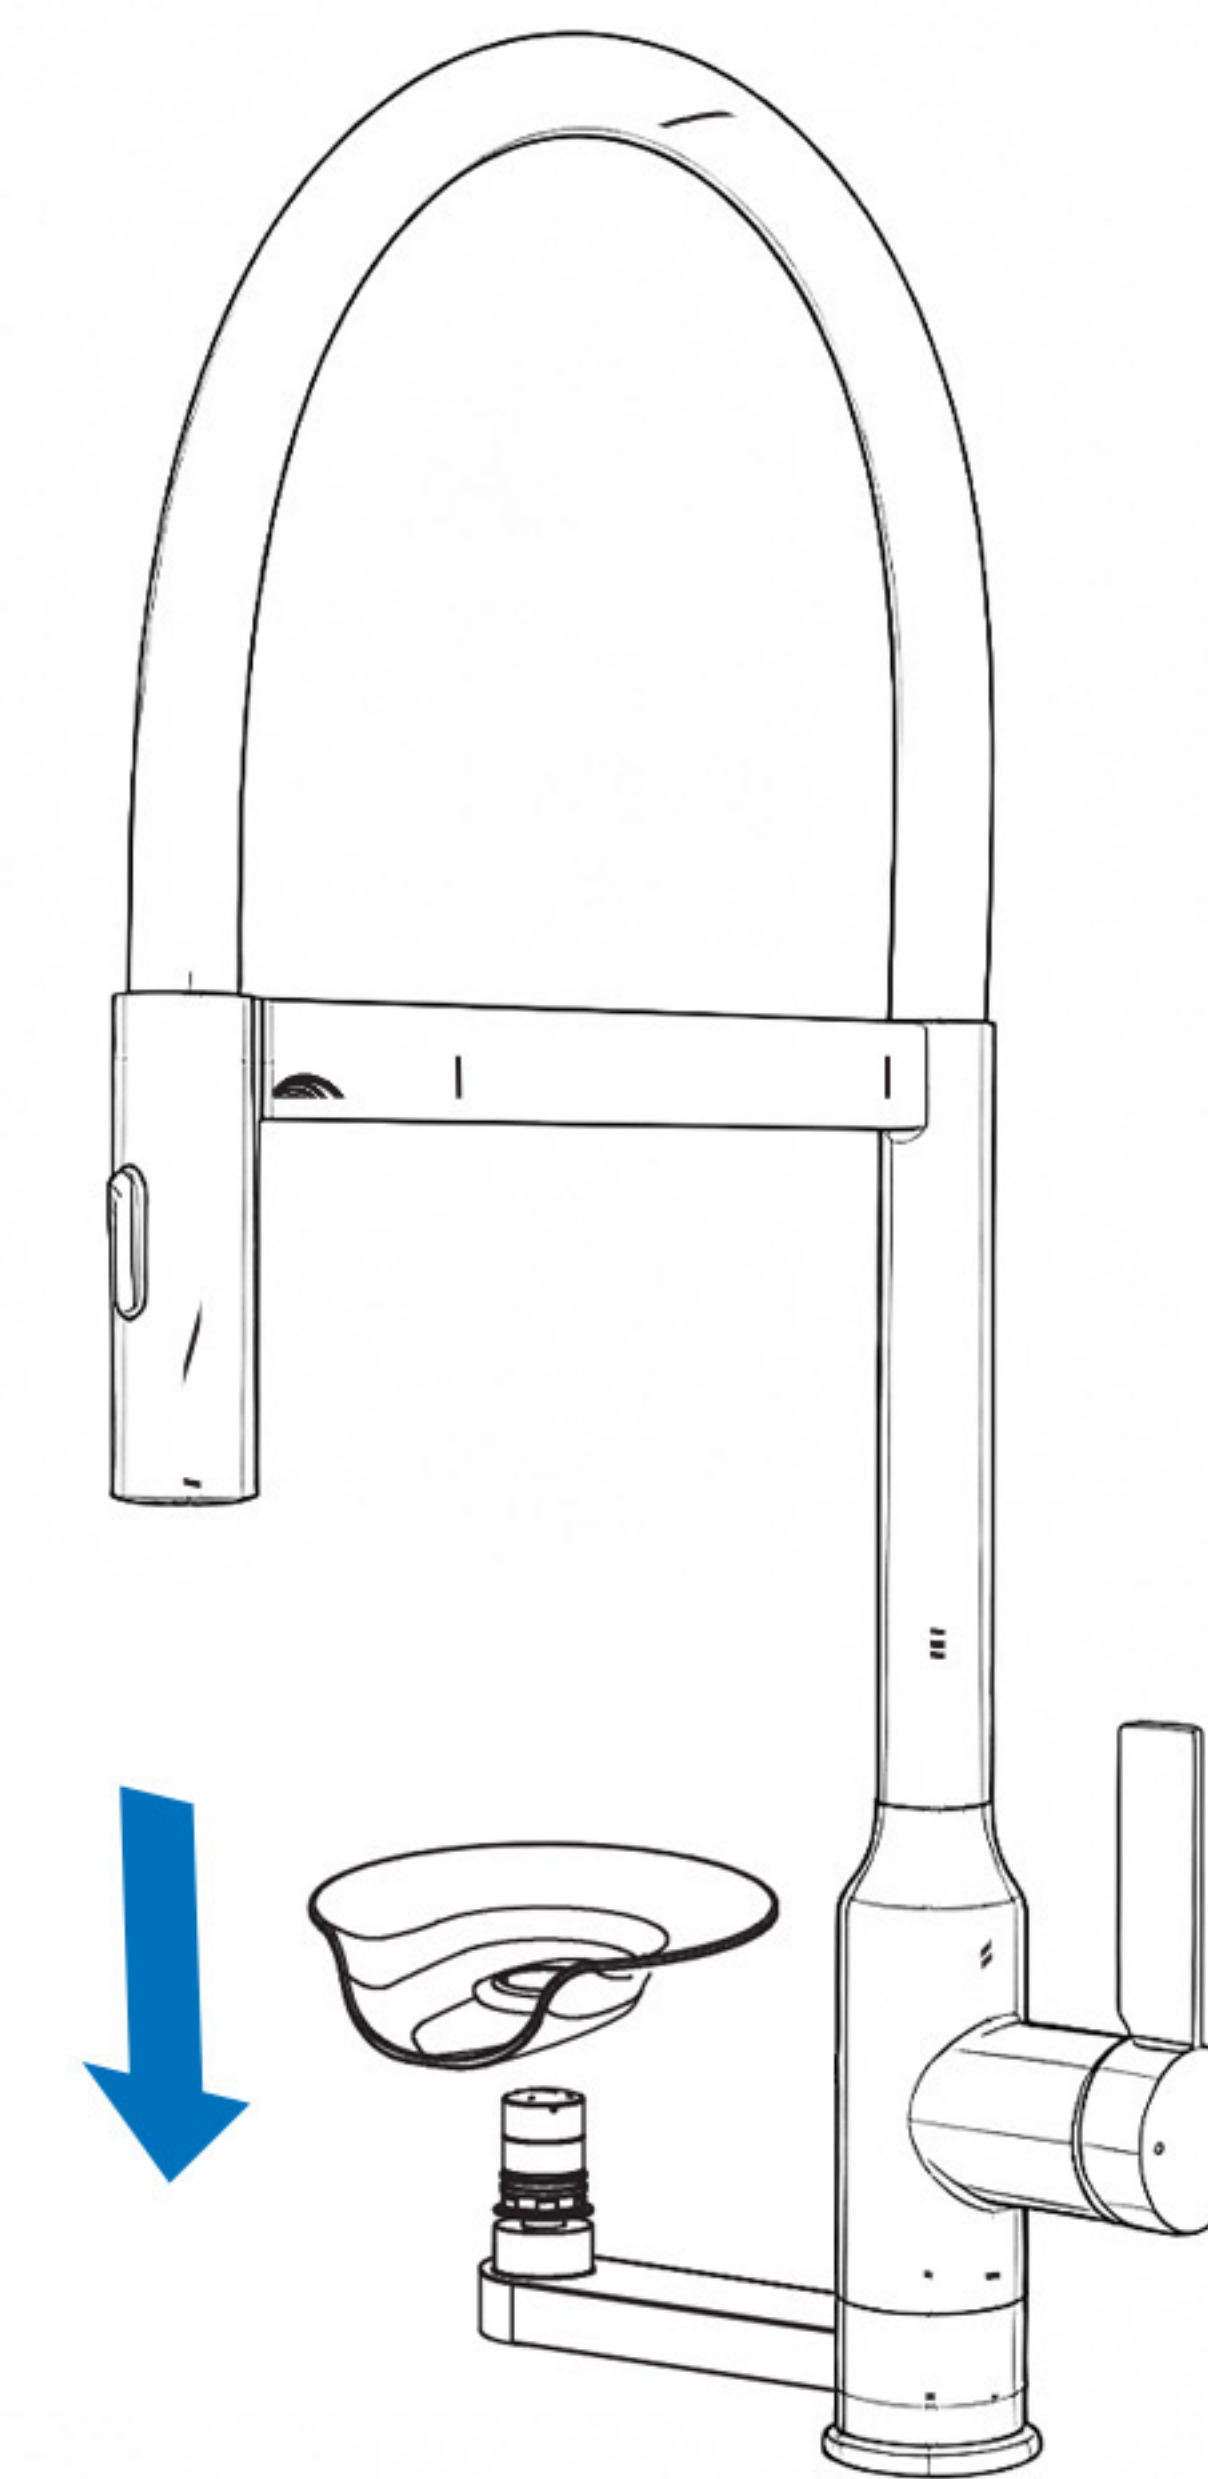

5. Finally, press the tray firmly onto the faucet arm to complete the installation.

User Guide

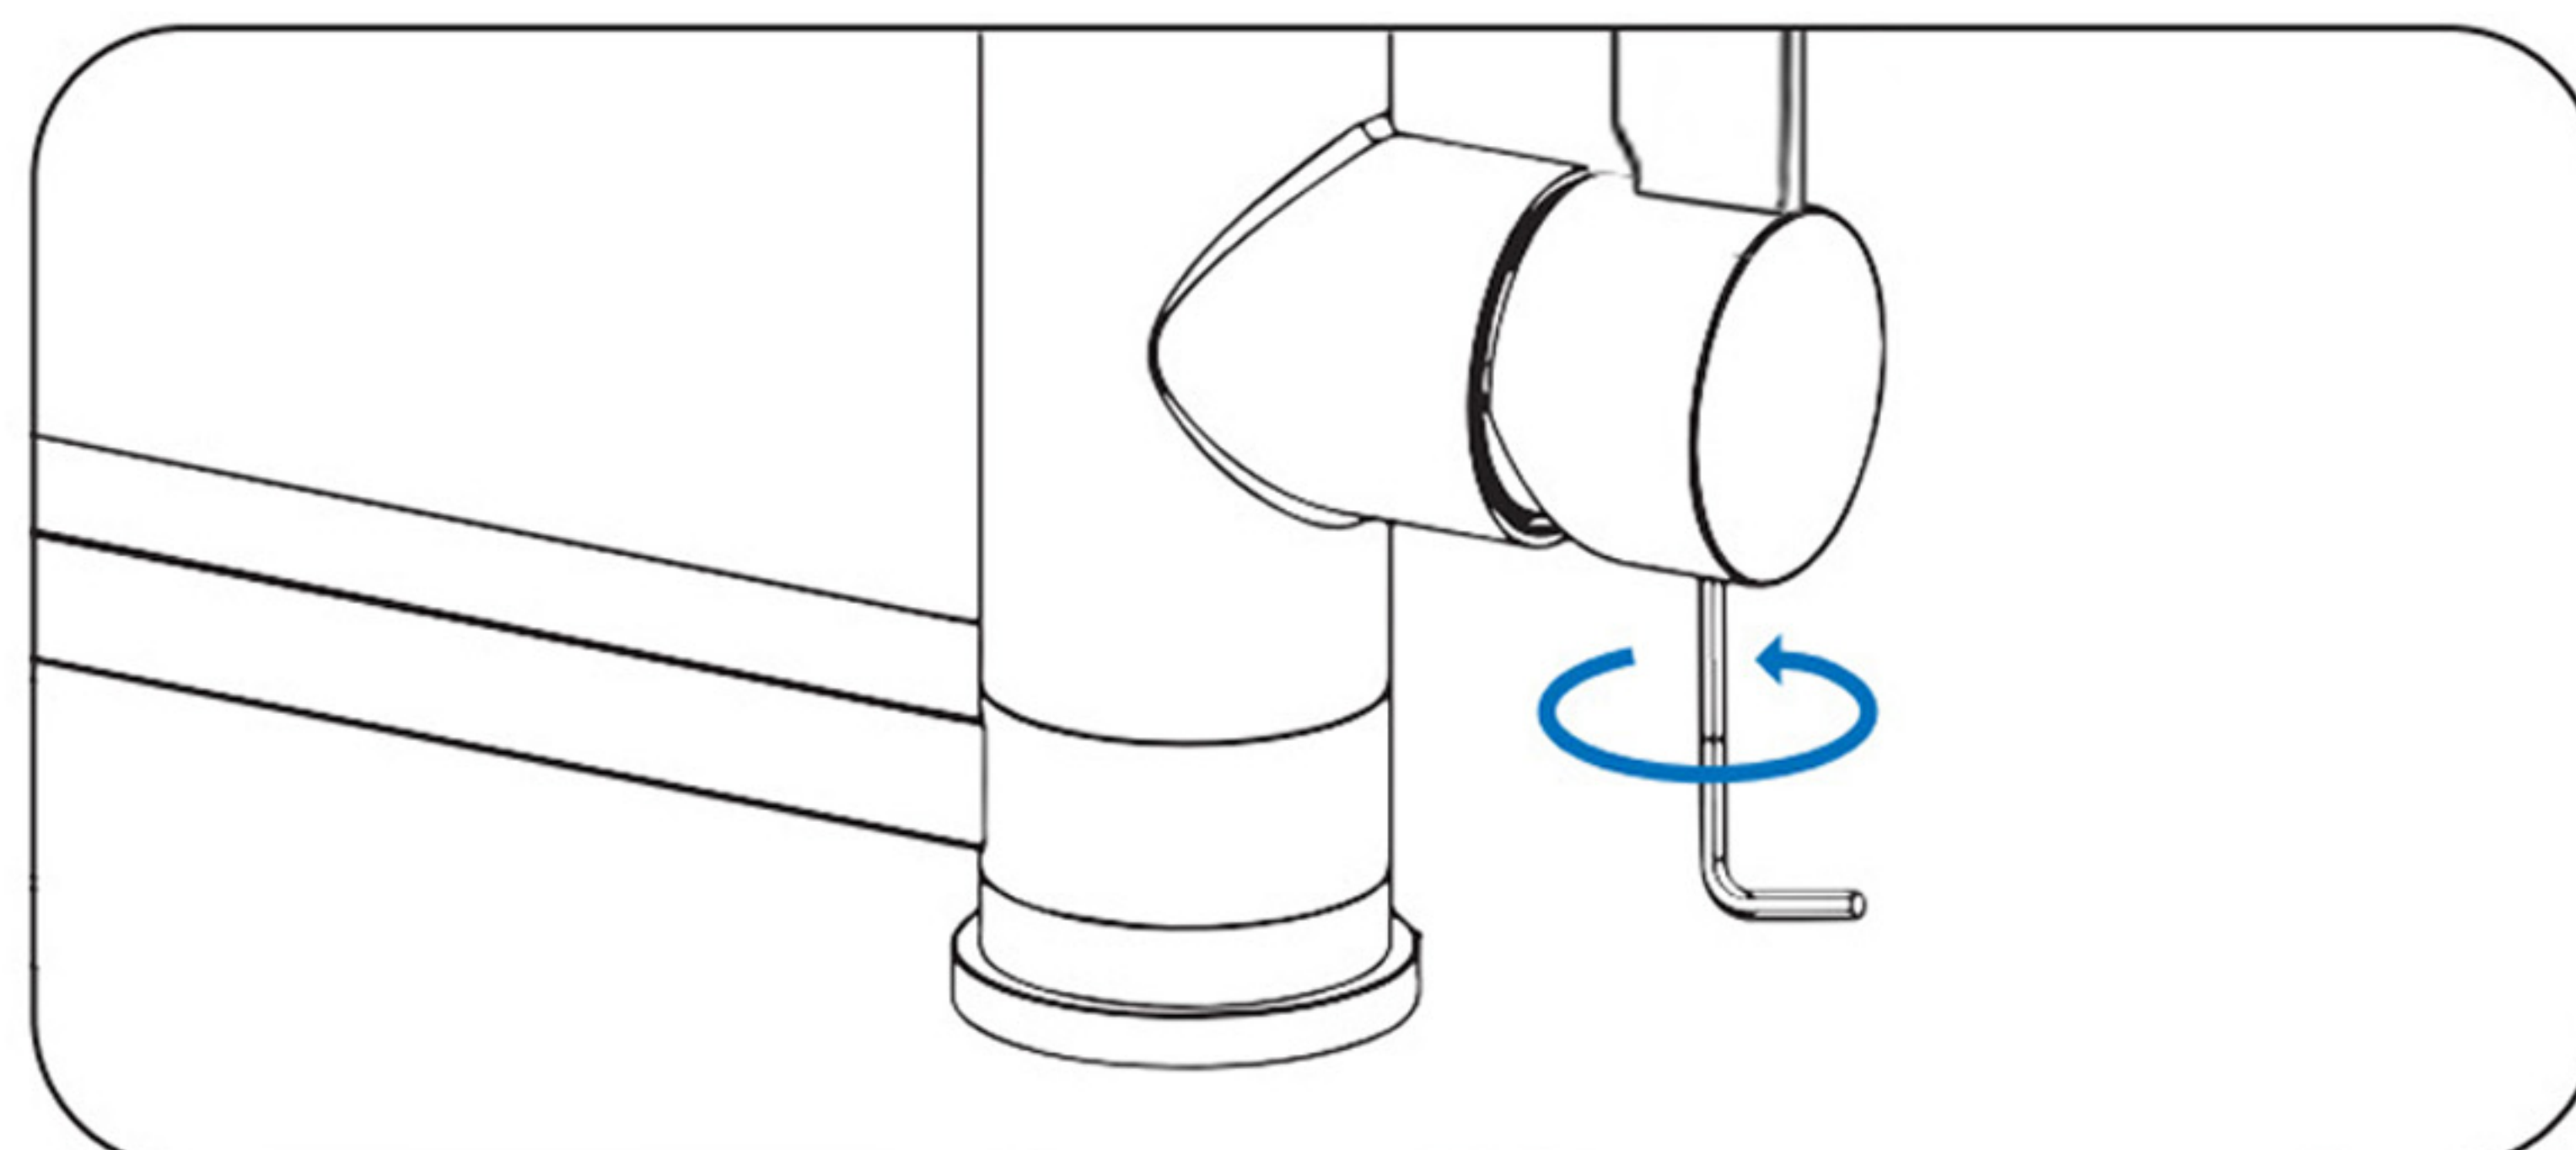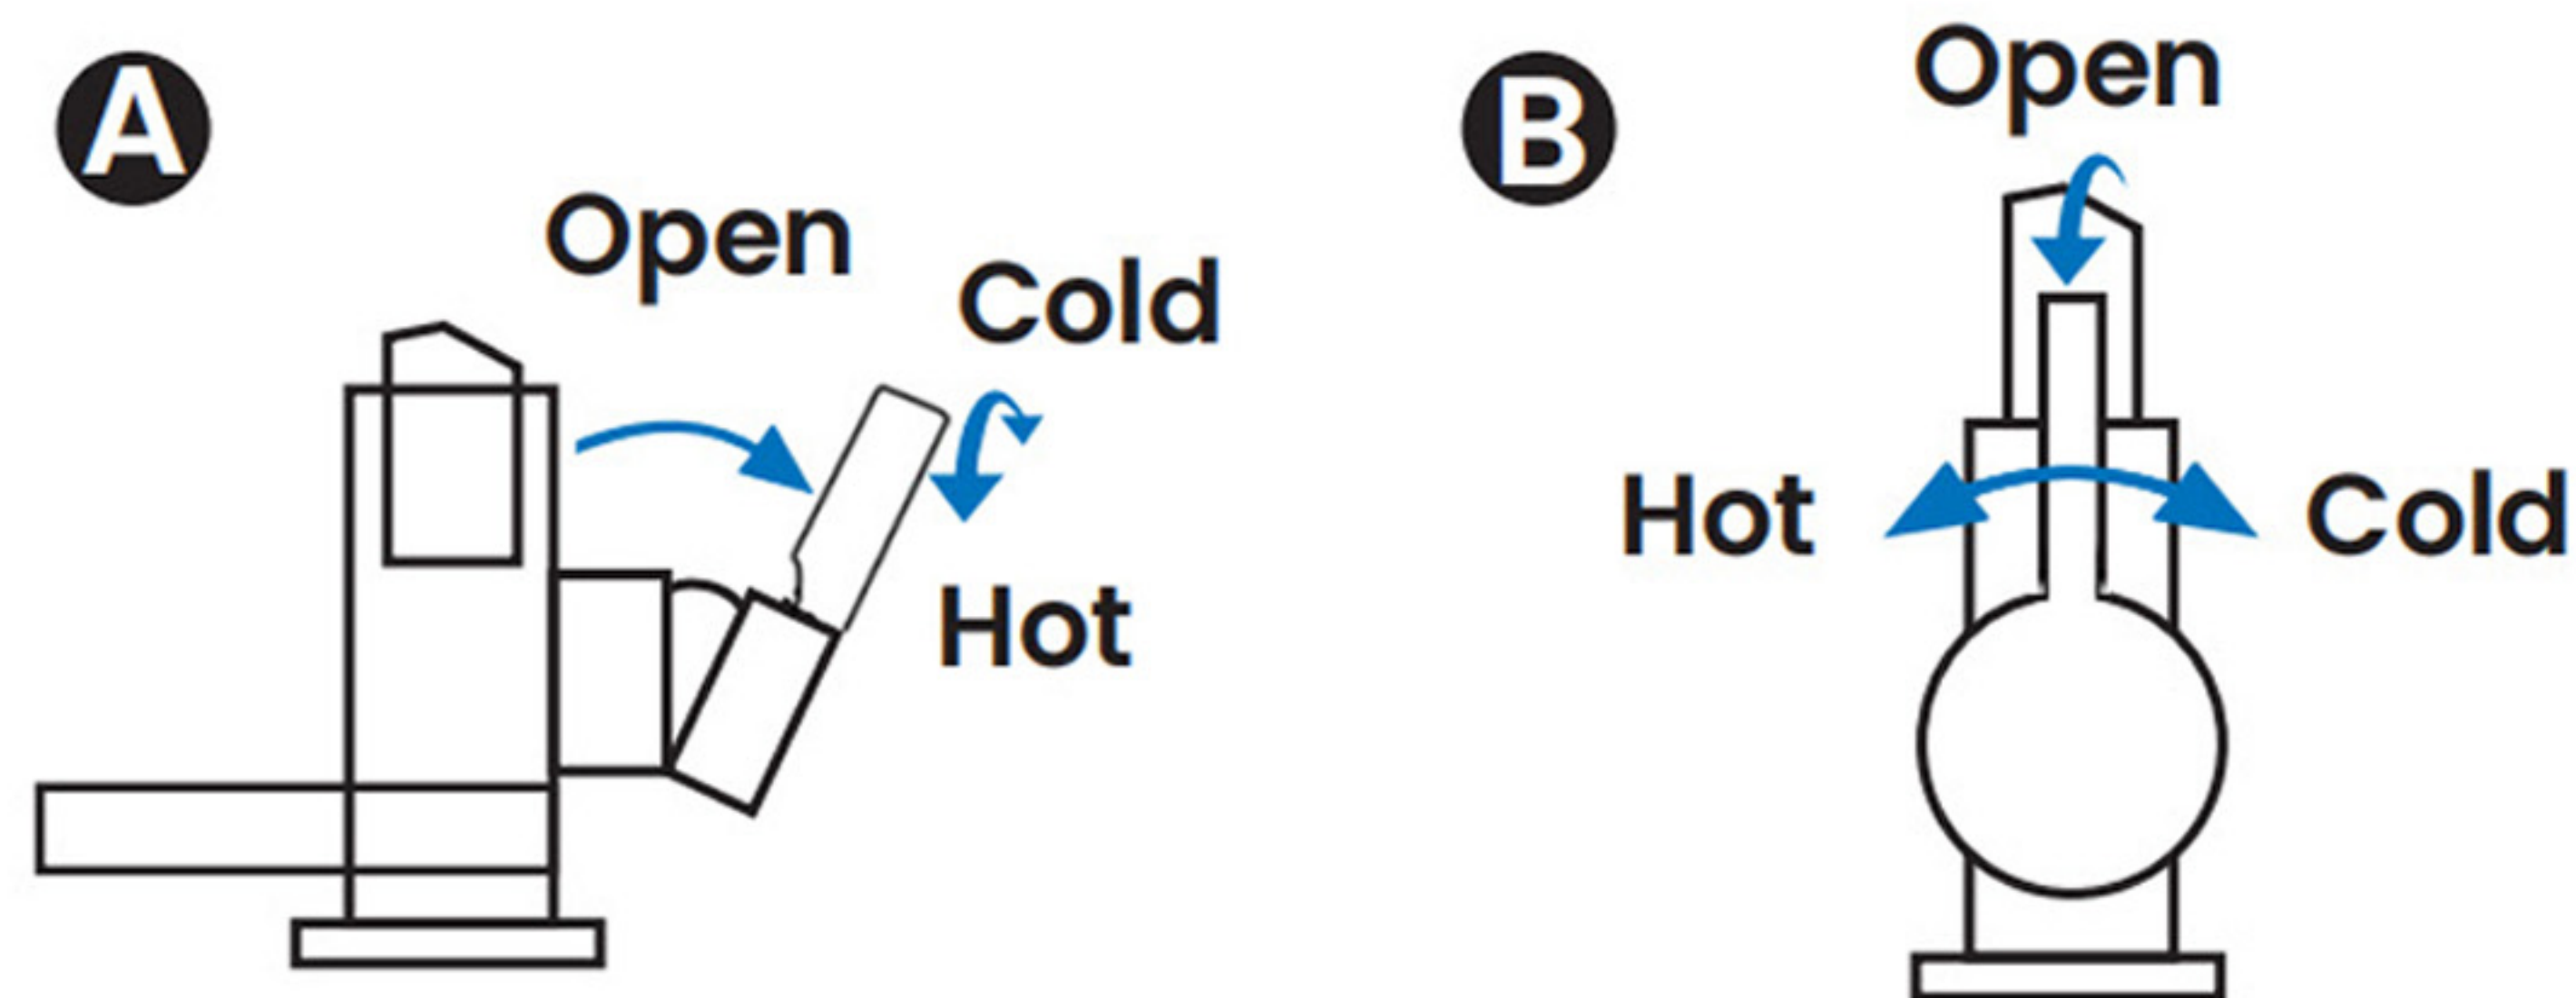

1. Open the handle as shown to turn on the water. The hot and cold water directions can be changed by switching the water hose connections.

2. If the handle is loose, use the hex wrench to tighten it.

*Product specifications are subject to change without notice.