


ASSEMBLY GUIDE





SAFETY AND CARE ADVICE

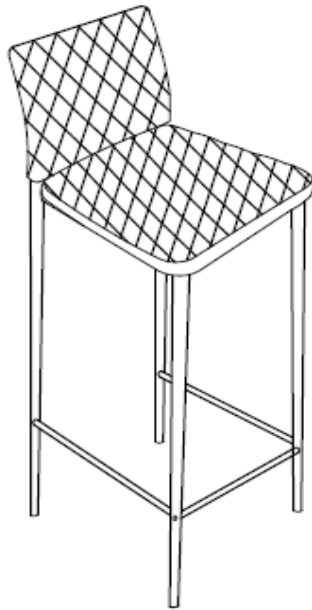

NO POWER TOOLS

SAFETY AND CARE ADVICE

- Check you have all the components and tools listed.
- Remove all fittings from the plastic bags and separate them into their groups.
- We do not recommend the use of power drills/drivers for inserting screws, as this could damage the unit. Only use hand screwdrivers and Allen keys.
- Keep children and animals away from the work area, small parts could cause choking if swallowed.
- Make sure you have enough space to layout the parts before starting.
- Assemble the item as close to its final position (in the same room) as possible.
- Do not overtighten the nuts to avoid causing damage to the threads.
- Only clean using a damp cloth and mild detergent, do not use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit
- This product should not be discarded with household waste. Take to your local authority waste disposal centre

IMPORTANT INFORMATION
















30 MINUTE
BUILD



MAXIMUM
CAPACITY 150Kg

PLEASE CHECK CAREFULLY AND MAKE SURE YOU HAVE ALL
FITTINGS AND TOOLS LISTED BELOW BEFORE YOU START.
PLEASE BE AWARE THAT QUANTITIES ARE PER CHAIR

 X08	 X02	 X02	 X04	 X06	 X10	 X01
 X01	 X01	 X01	 X01	 X01	 X02	

NOTE: The quantities above are the correct amount to complete the assembly. In some cases more fittings may be supplied than are required.


STEP 1

Attach the top cross-bar piece between the 2 separate leg frame pieces using 1 x curved washer [E] followed by 1x spring washer [F] and then 1 x screw [B] on each side. Finger tighten screws until all pieces are in the correct place.

Then attach the foot bar rest at the bottom front of the leg frame - use 1 x screw [C] on each side.

Next, slot the seat back into the holes of the leg frame. Secure each side with 1x curved washer [E] followed by 1 x spring washer [F] and then 1 x screw [A].



Once all components are in place, tighten screws with Allen keys [G and H]

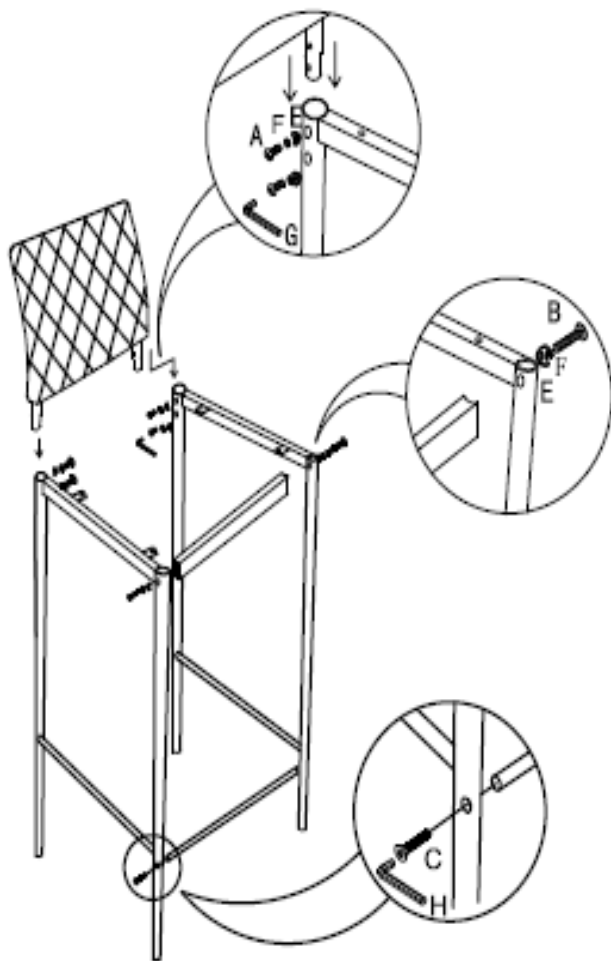

STEP 2

Attach the seat pad. Carefully align with holes in the underside of the seat pad with the holes in the seat frame and connect using 1 x washer [D] followed by 1 x spring washer [F] then 1 x screw [A] for each of the 4 holes.

Once all screws are in place and finger tight, you can fully tighten them with Allen key [G].

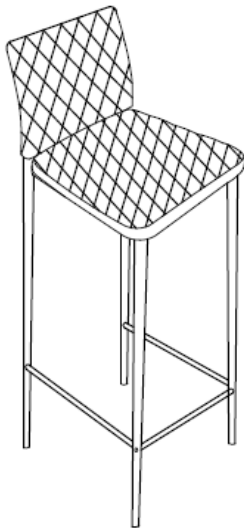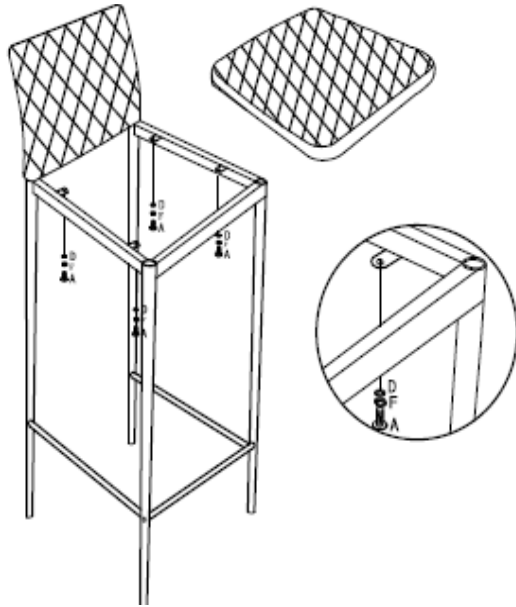


STEP 3

Check stability. Your stool is now ready to use!



furniturebox

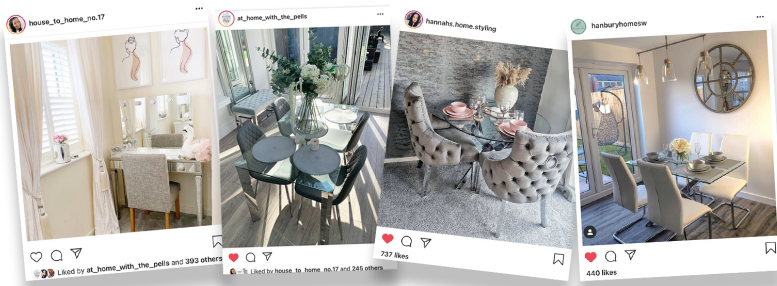

WE **L♥VE** INTERIORS! SHARE
YOURS WITH US ON SOCIAL MEDIA

1. follow us on Instagram
2. post your interior
3. tag us to be featured



OUR 2 YEAR* GUARANTEE

our products come with a 2 year guarantee
to give you peace of mind shopping at
Furniturebox

*excludes some garden furniture items
which have a 1 year guarantee



WHAT THE GUARANTEE COVERS



PRE-INSERTED FIXINGS
e.g. lose metal threads



FAULTY JOINTS
e.g. legs bending



EXTERNAL FIXING FAULTS
e.g. bonding/glue



STRUCTURAL INTEGRITY
e.g. the frame of the
product

ACTIVATE YOUR GUARANTEE ONLINE

scan this QR code with your phone to read
the full guarantee online and register your
product. It only takes a moment to fill out.
Or visit: furniturebox.co.uk/our-guarantee