



ASSEMBLY INSTRUCTION

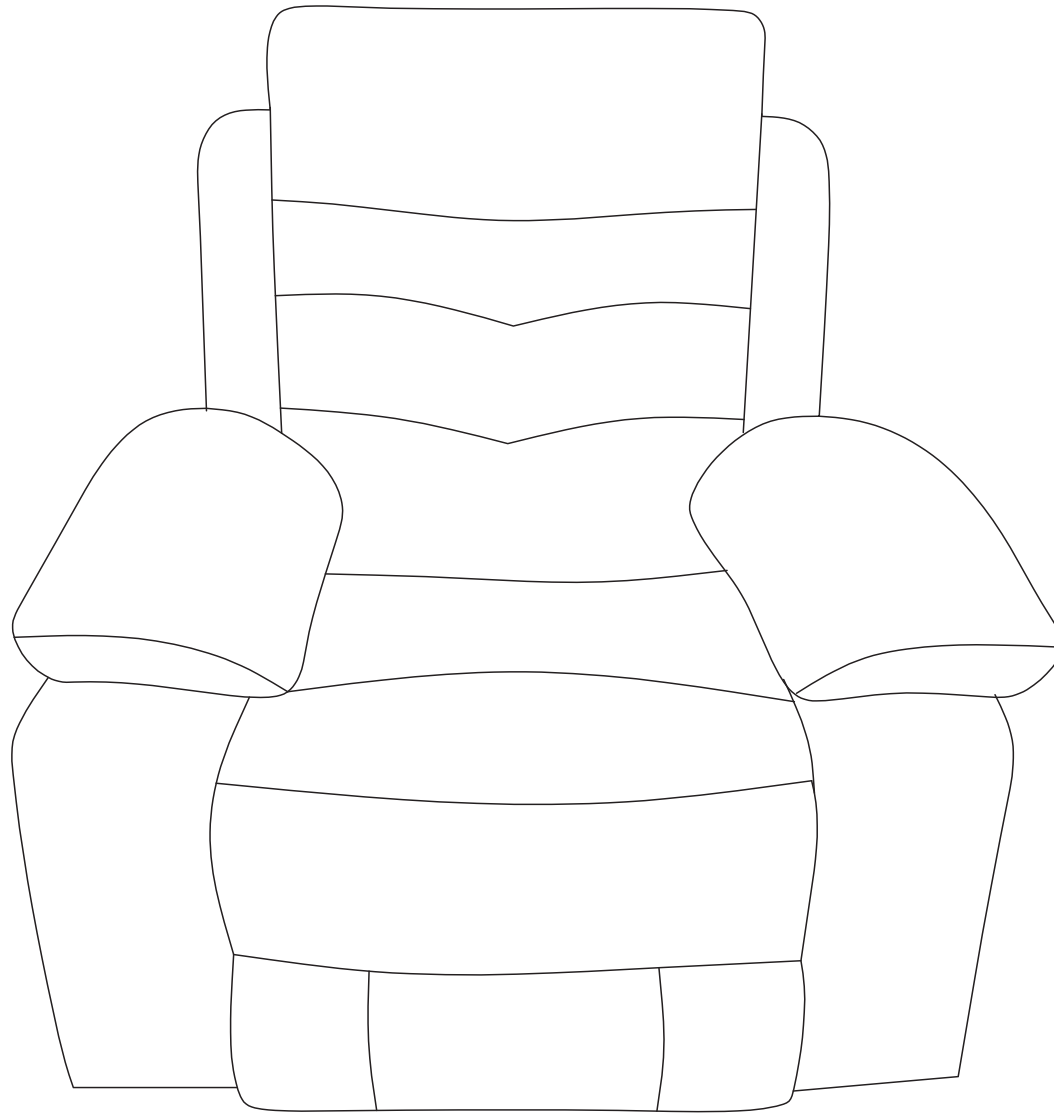


A

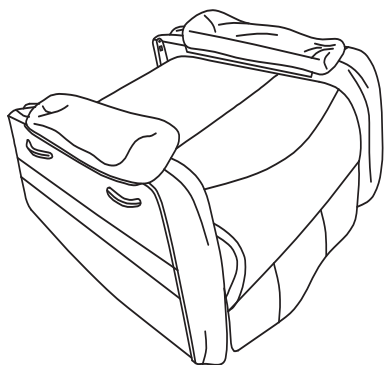


seat

B

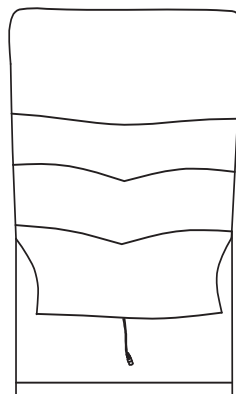

back

C

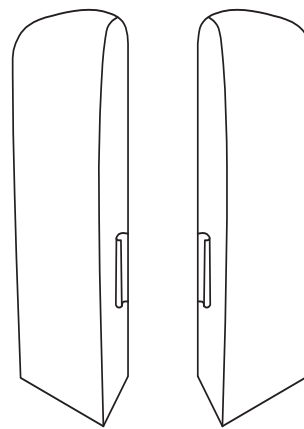


C1

C2


back ears

D

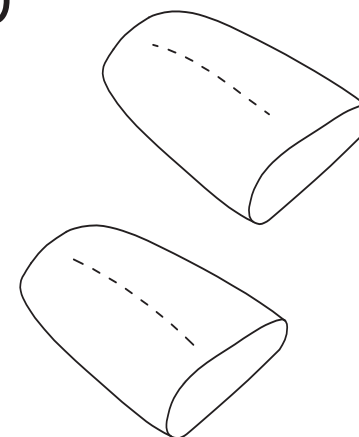


arm pads

E

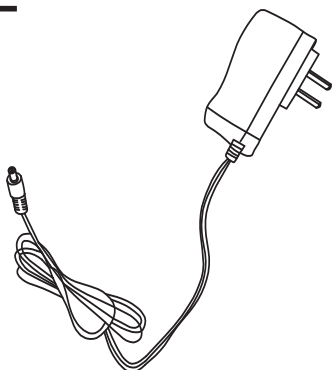


Plug

F



spring pocket



G

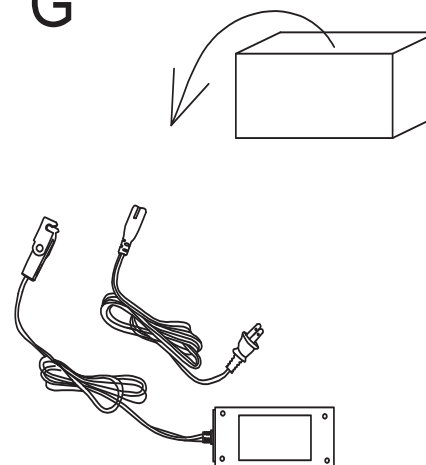

adaptor and plug

1



Open the carton, cut off pack tape, and take out each part.

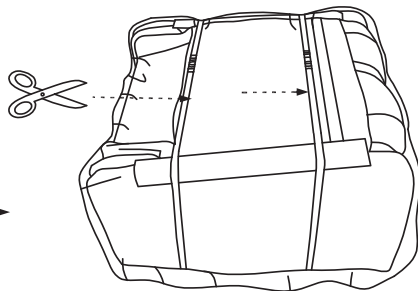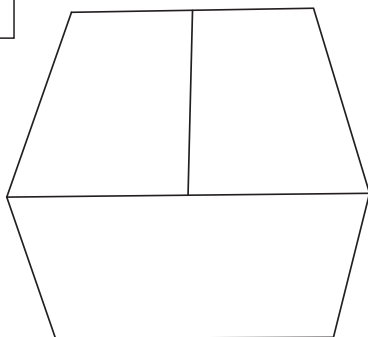

B




A



D

F









C

2

A

Open arm.


Pull hard

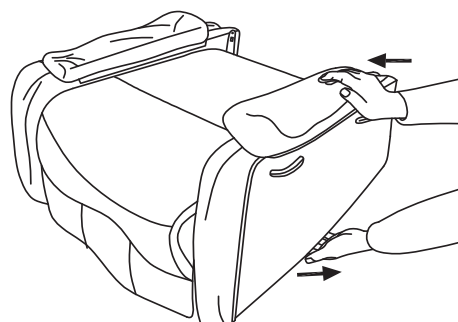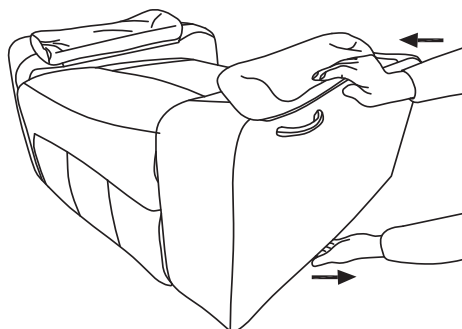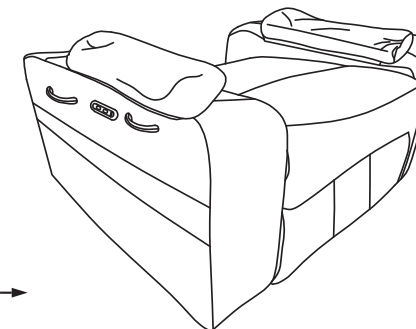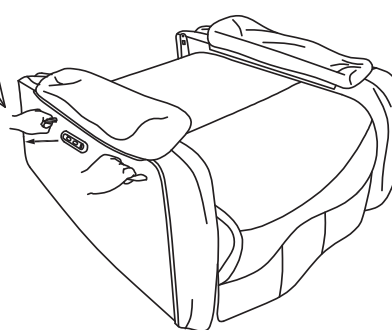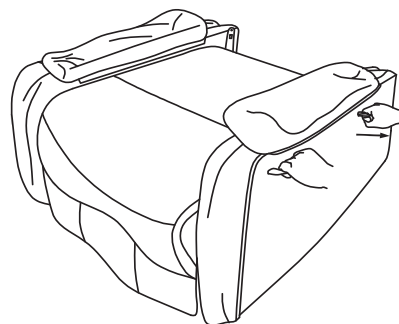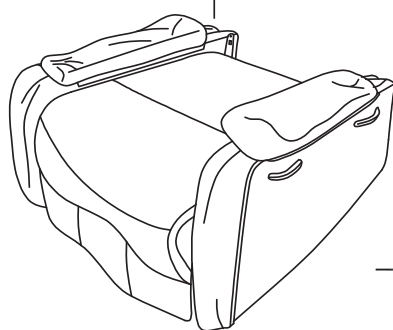


hold the handle of the arm and pull hard to make it stretch out, when you need fold it pull hard from the bottom and push the top at the same time

3

Open the compressed bag and install the seat cushion.



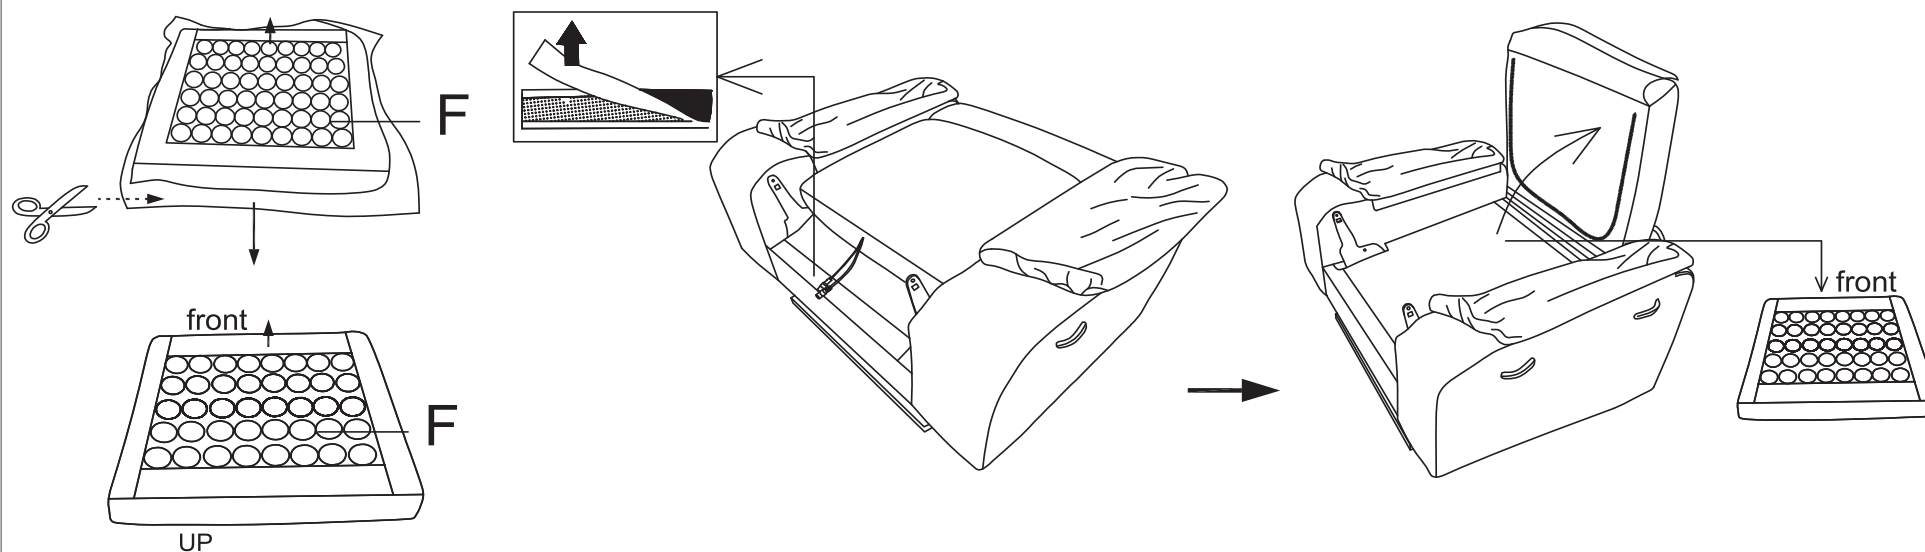


4

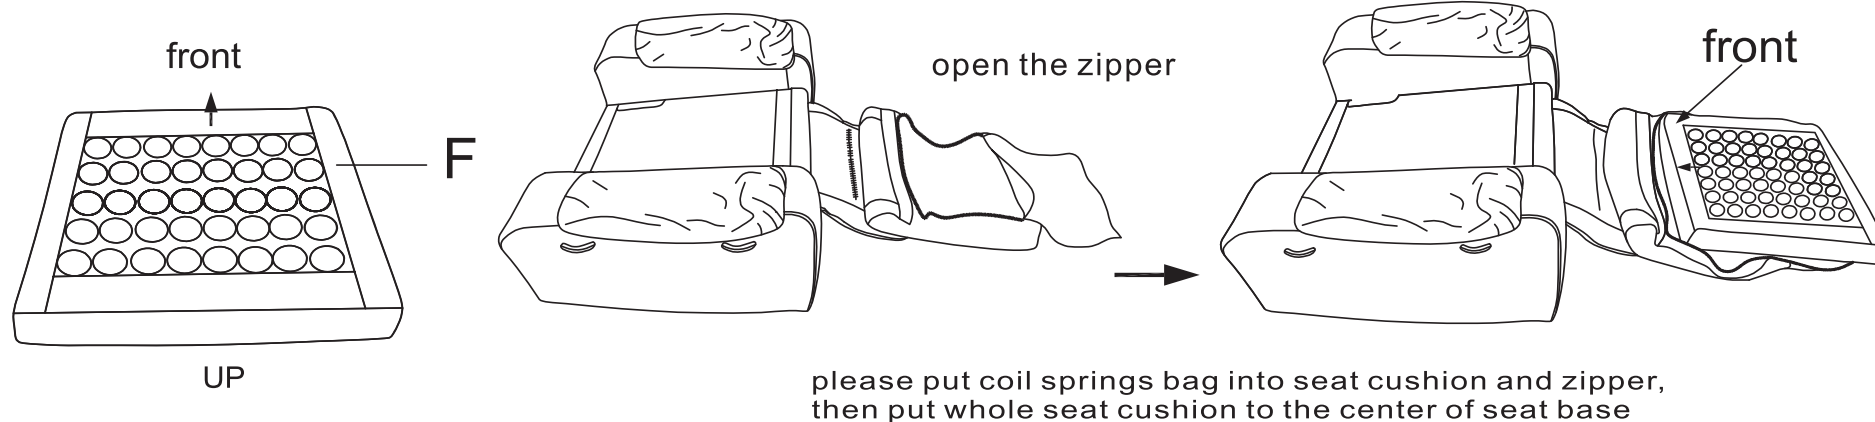

5


Assemble the seat cushion

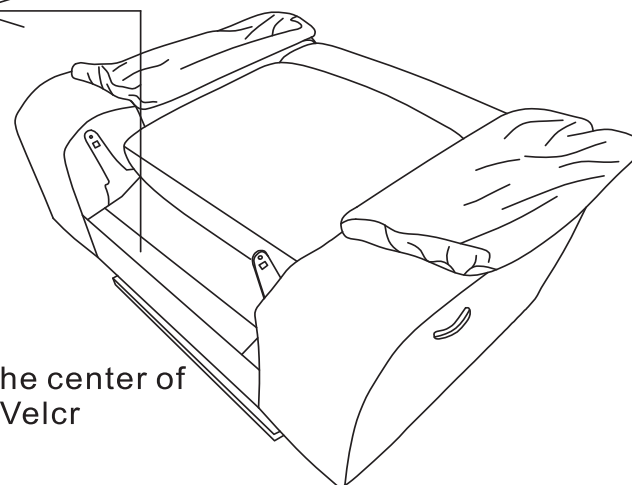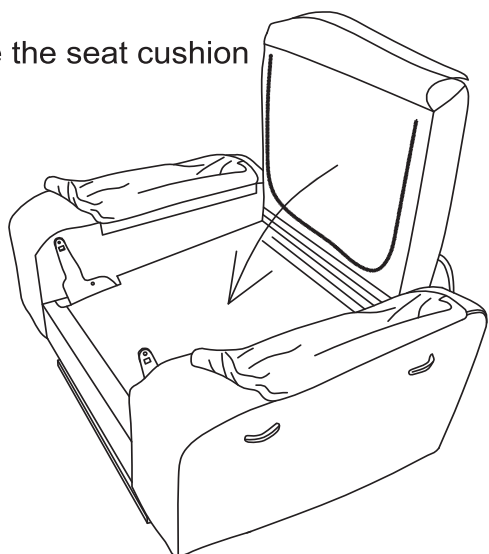

please put seat cushion to the center of
and tight with Velcr



6

Assemble armrest

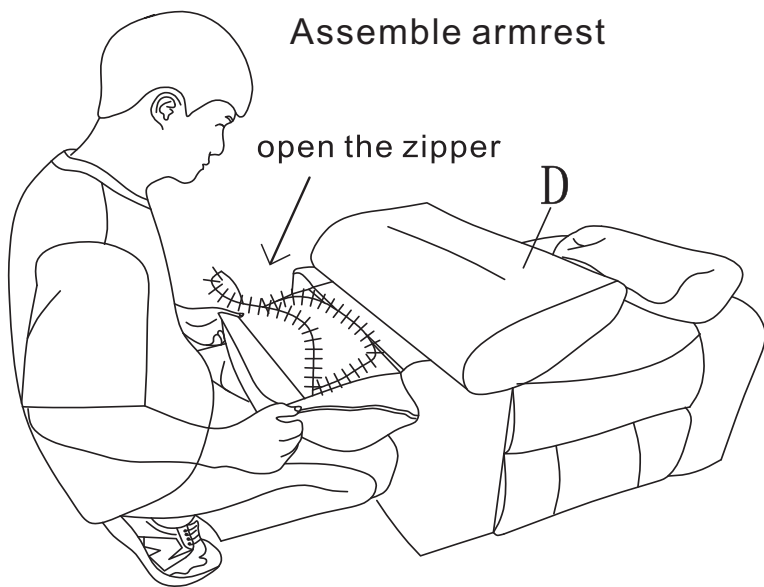




open the zipper

D

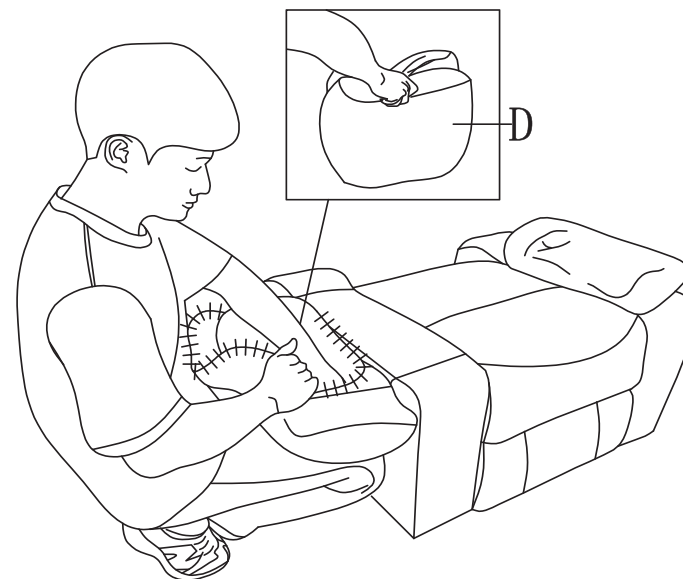





D

7

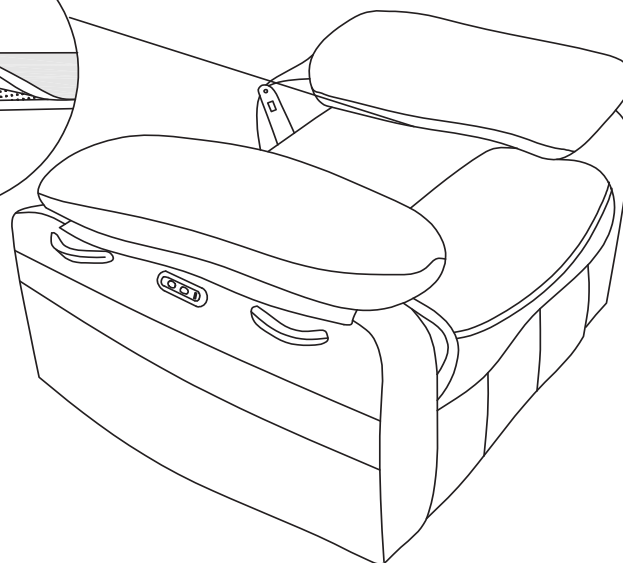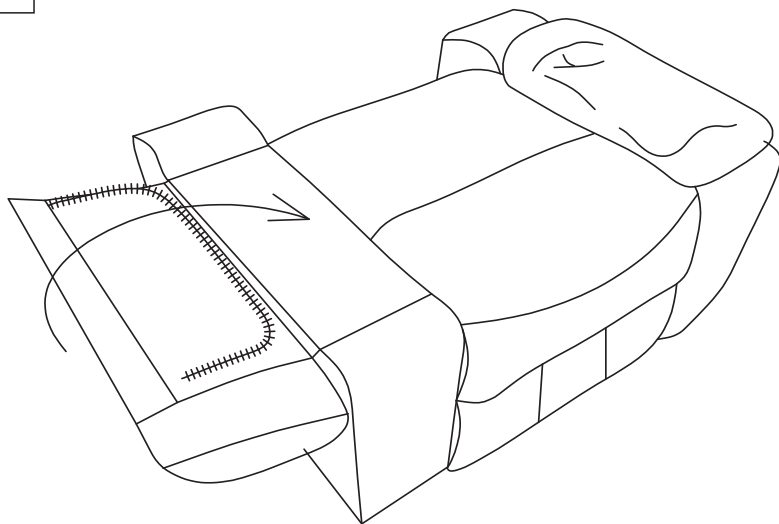


8

Assemble the backrest.

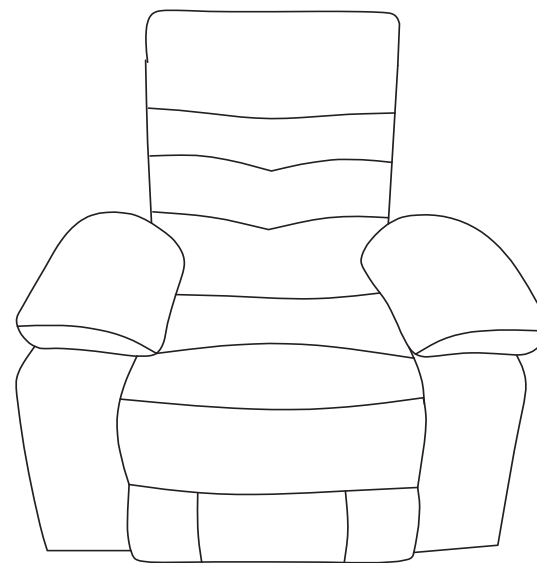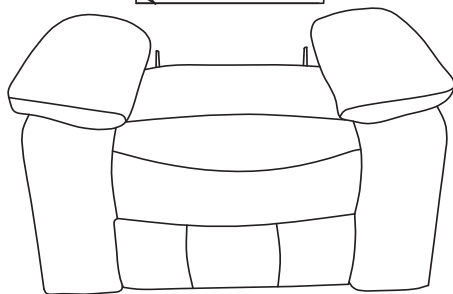


9

Assemble the back ears

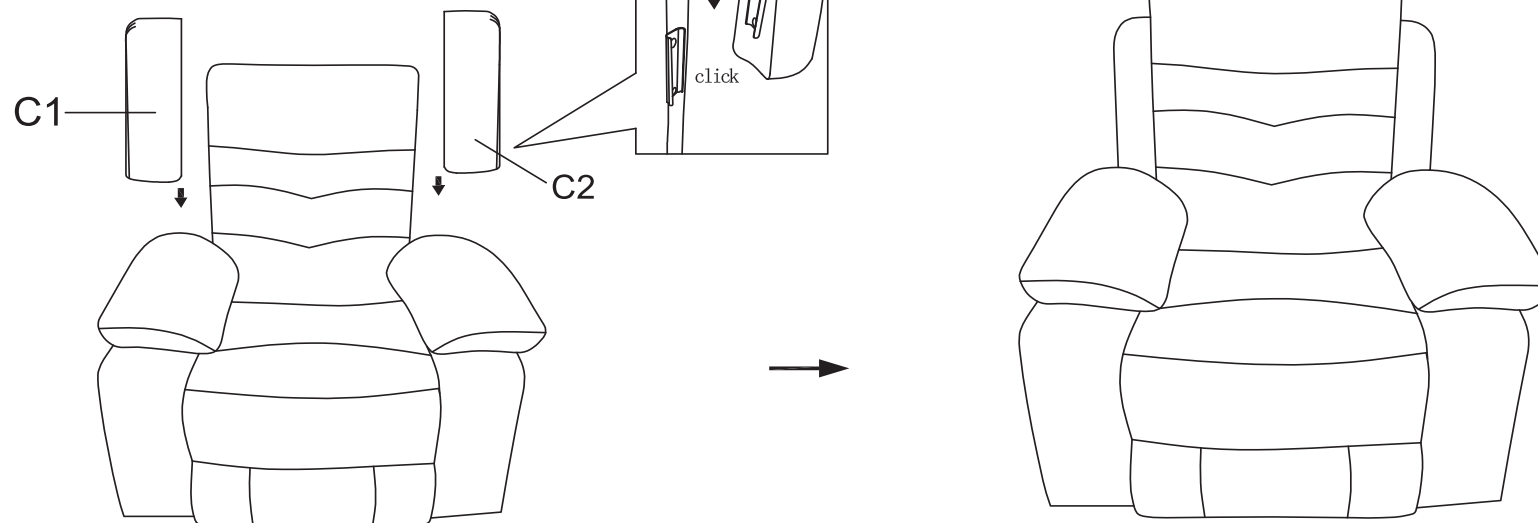


10

Connect the cord accordingly.

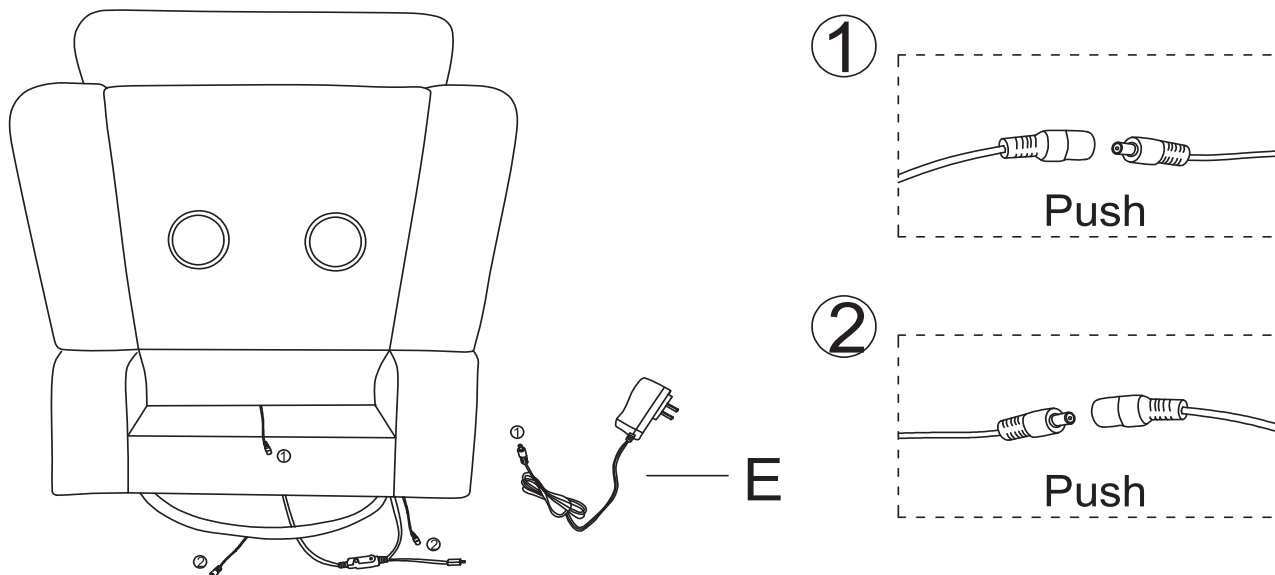

11

Connect the cord accordingly.

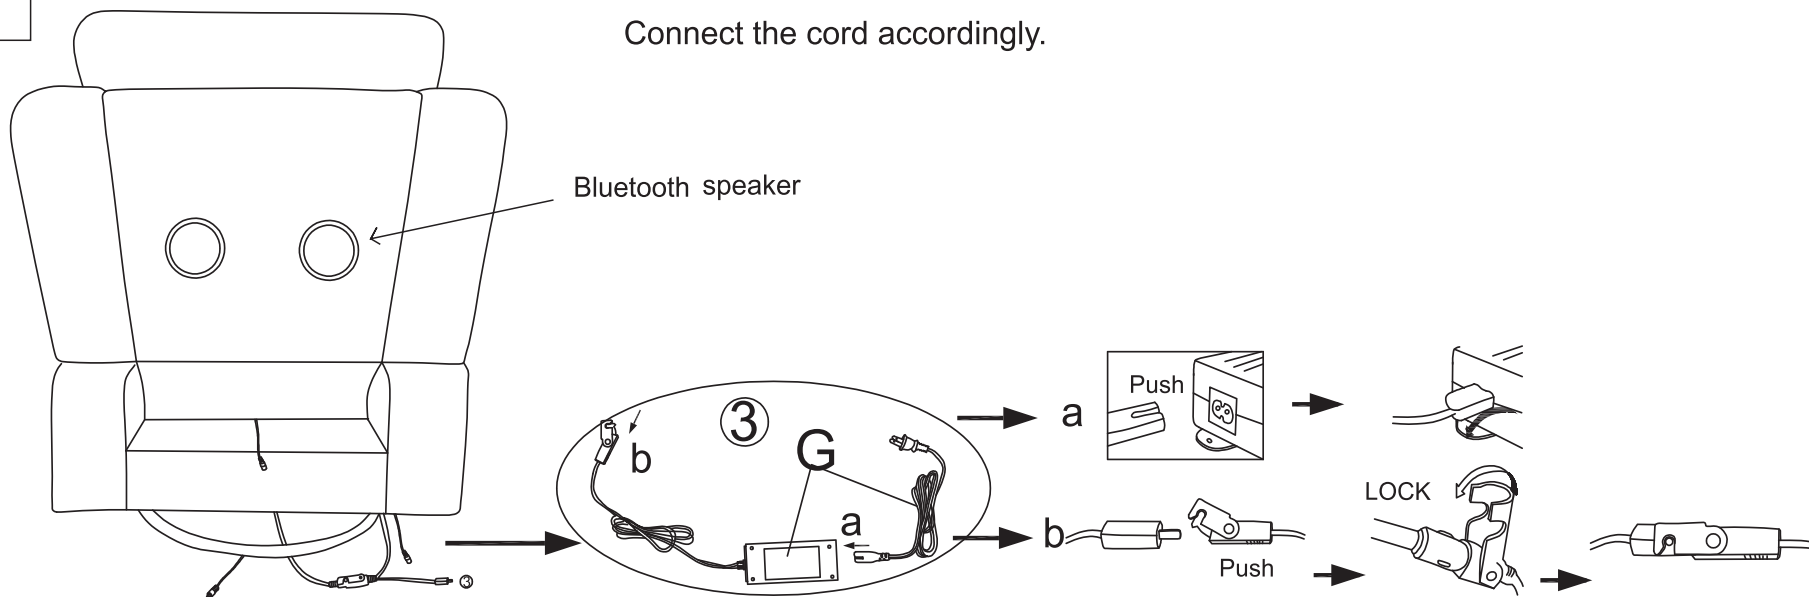

12

The function introduction

