


INSTALLATION INSTRUCTIONS

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.

1. Shut off the power at the circuit breaker and remove existing fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.
3. Put all the lamp heads up and the tube into the lamp heads. (See Fig. 1)
4. Pull the fixture loop screw into the fixture.
5. Install the four pulleys on the fixture and outlet box respectively. (See Figure 2 & Figure 3)
6. Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4"). Lock into place with hexnut.
7. Run another hexnut down threaded pipe almost touching first hexnut. Now screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Screw third hexnut onto end of threaded pipe protruding from back of mounting strap.
8. Connect mounting strap to outlet box.
9. Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
10. After desired position is found, tighten both top and bottom hexnuts up against the bottom and top of the mounting strap.
11. Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
12. Weave electrical wire and ground wire through chain links no more than 3 inches apart. Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
13. Now connect the electrical wires as follows:
Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture ground wire to it. Otherwise, connect fixture ground wire directly to the mounting plate using the green screw provided. Tuck the wire connections neatly into the outlet box.
14. Raise canopy to ceiling.
15. Secure canopy in place by tightening threaded ring onto screw collar loop.
16. Install the bulb (not included). Please follow the wattage label located on the fixture body. Do not exceed the recommended wattage.

INSTALLATION METHOD

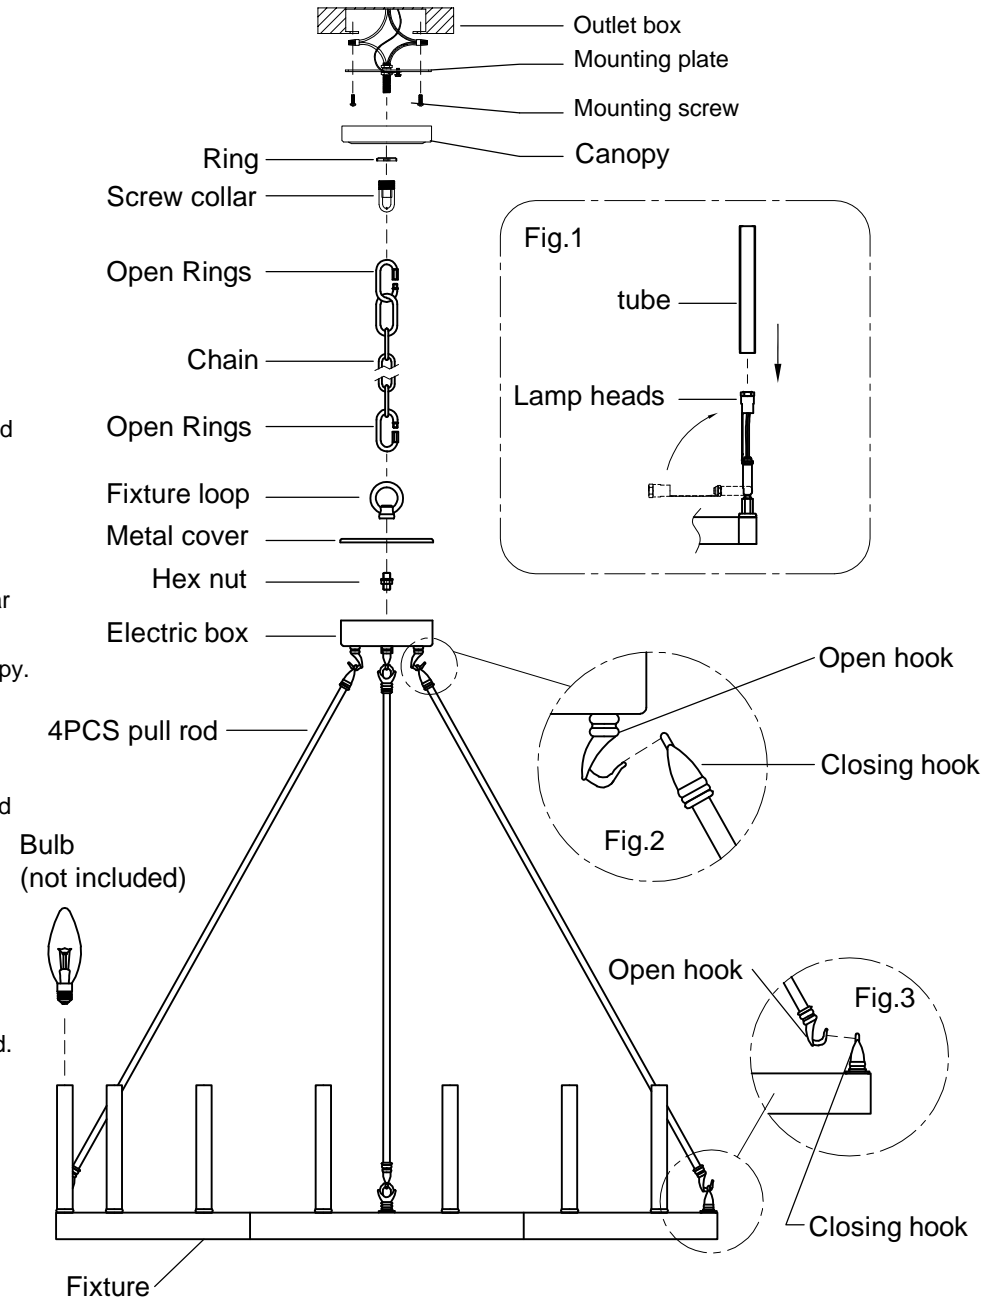

NOTE: Keep your receipt and these instructions for proof of purchase.