


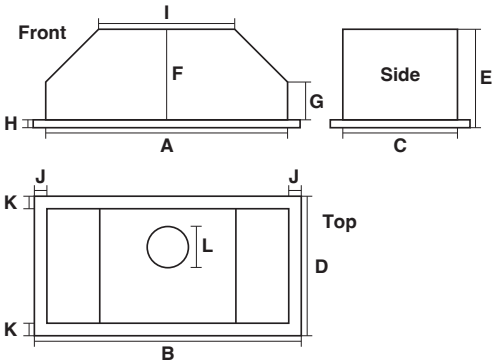

PLJL.INS 15 Perfect for compact kitchens, the PLJL 15" insert delivers impressive performance in a space-saving design. Choose between a 600 CFM single blower or a powerful dual 1200 CFM setup to match your cooking style. Even at maximum speed, the hood produces just 7 sones—about the volume of normal conversation—so you can cook comfortably without raising your voice. Sleek stainless steel push button controls give you four-speed flexibility, while the time-delay shut-off function automatically clears lingering smoke and grease after you're done. For small spaces that demand big performance, the PLJL 15" delivers.

Configuration and Dimensions

	28	34	40	46	52	58
A	26.5	32.375	38.25	44.25	50.125	56
B	28.125	34.125	39.875	45.875	51.75	57.625
C	13.625	13.625	13.625	13.625	13.625	13.625
D	15	15	15	15	15	15
E	14.375	14.375	14.375	14.375	14.375	14.375
F	13.75	13.75	13.75	13.75	13.75	13.75
G	3.625	3.625	3.625	3.625	3.625	3.625
H	.625	.625	.625	.625	.625	.625
I	17.25	17.25	19.5	22.5	22.5	22.5
J	.75	.75	.75	.75	.75	.75
K	.625	.625	.625	.625	.625	.625
L	6 or 8	6 or 8	6 or 8	6 or 8	6 or 8	6 or 8

Hood Type Insert

Features

Control Type Stainless Steel Push Buttons

Lighting LED

Ventilation System

Maximum Air Flow Capacity 600 or 1200 CFM

Speed Levels 4 Speeds

Airflow (Quiet/Low/Med/High) 150/300/450/600
or 300/600/900/1200

Noise Level 48.0 db or 4 Sones Max
or 53.8 db or 6 Sones Max

Duct Type/Size 6 (600 CFM) or 8 (1200 CFM)


Voltage 110v

Motor Single or Dual

Filter Type Stainless Steel Baffle (Dishwasher Safe)

Material High Quality 430 Stainless Steel

Warranty 3 Year Parts Warranty

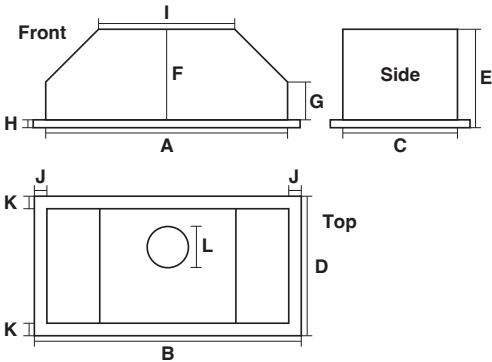

PLJL.INS 18 For medium-sized kitchens, the PLJL 18" insert strikes the perfect balance between performance and quiet operation. Choose from a 600 CFM single blower or a dual 1200 CFM option, both designed to clear the air quickly and efficiently. Even at its highest speed, the hood produces just 7 sones, so you can enjoy easy conversation while you cook. With four-speed stainless steel push button controls, you have complete flexibility over airflow, whether simmering or searing. The time-delay shut-off button makes cleanup effortless, ensuring lingering smoke and grease are gone without you lifting a finger. Designed for everyday cooking and entertaining, the PLJL 18" keeps your kitchen fresh and inviting.

Configuration and Dimensions

	28	34	40	46	52	58
A	26.5	32.375	38.25	44.25	50.125	56
B	28	34	39.875	45.875	51.75	57.625
C	16.5	16.5	16.5	16.5	16.5	16.5
D	18	18	18	18	18	18
E	14.375	14.375	14.375	14.375	14.375	14.375
F	13.75	13.75	13.75	13.75	13.75	13.75
G	3.625	3.625	3.625	3.625	3.625	3.625
H	.625	.625	.625	.625	.625	.625
I	17.25	17.25	19.5	22.5	22.5	22.5
J	.75	.75	.75	.75	.75	.75
K	.625	.625	.625	.625	.625	.625
L	6 or 8	6 or 8	6 or 8	6 or 8	6 or 8	6 or 8

Hood Type. Insert

Features

Control Type Stainless Steel Push Buttons

Lighting LED

Ventilation System

Maximum Air Flow Capacity 600 or 1200 CFM

Speed Levels 4 Speeds

Airflow (Quiet/Low/Med/High). 150/300/450/600
or 300/600/900/1200

Noise Level 48.0 db or 4 Sones Max
or 53.8 db or 6 Sones Max

Duct Type/Size 6 (600 CFM) or 8 (1200 CFM)

Voltage 110v

Motor Single or Dual


Filter Type Stainless Steel Baffle (Dishwasher Safe)

Material High Quality 430 Stainless Steel

Warranty 3 Year Parts Warranty



PLJL.INS 21 When your kitchen demands maximum coverage, the PLJL 21" insert rises to the occasion. Equipped with a powerful dual blower system at up to 1200 CFM—or a 600 CFM single option—it effortlessly clears smoke, steam, and grease even during large-scale cooking sessions. Despite its strength, the hood remains surprisingly quiet, topping out at only 7 sones. Stainless steel push button controls let you fine-tune the four fan speeds for optimal performance, while the sleek design blends seamlessly into custom cabinetry. Hosting a crowd? The 15-minute time-delay function ensures the air stays clean long after you’ve finished cooking. With the PLJL 21", you can count on a kitchen that feels just as refined as it looks.

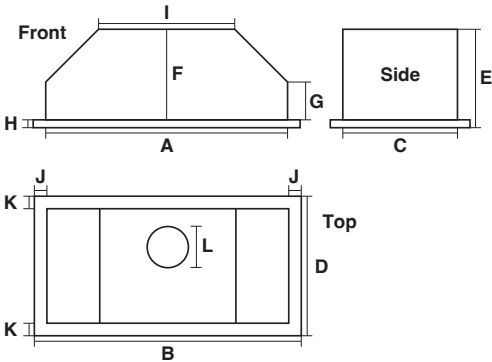

Configuration and Dimensions

	28	34	40	46	52	58
A	26.5	32.375	38.325	44.25	50.125	56
B	28	34	40	45.875	51.75	57.625
C	19.5	19.5	19.5	19.5	19.5	19.5
D	21	21	21	21	21	21
E	14.375	14.375	14.375	14.375	14.375	14.375
F	13.75	13.75	13.75	13.75	13.75	13.75
G	3.625	3.625	3.625	3.625	3.625	3.625
H	.625	.625	.625	.625	.625	.625
I	17.25	17.25	19.5	22.5	22.5	22.5
J	.75	.75	.75	.75	.75	.75
K	.625	.625	.625	.625	.625	.625
L	6 or 8	6 or 8	6 or 8	6 or 8	6 or 8	6 or 8

Hood Type. Insert

Features

Control Type Stainless Steel Push Buttons
Lighting LED

Ventilation System

Maximum Air Flow Capacity 600 or 1200 CFM
Speed Levels 4 Speeds
Airflow (Quiet/Low/Med/High). 150/300/450/600
or 300/600/900/1200
Noise Level 48.0 db or 4 Sones Max
or 53.8 db or 6 Sones Max
Duct Type/Size 6 (600 CFM) or 8 (1200 CFM)
Voltage 110v
Motor Single or Dual
Filter Type Stainless Steel Baffle (Dishwasher Safe)
Material High Quality 430 Stainless Steel
Warranty 3 Year Parts Warranty