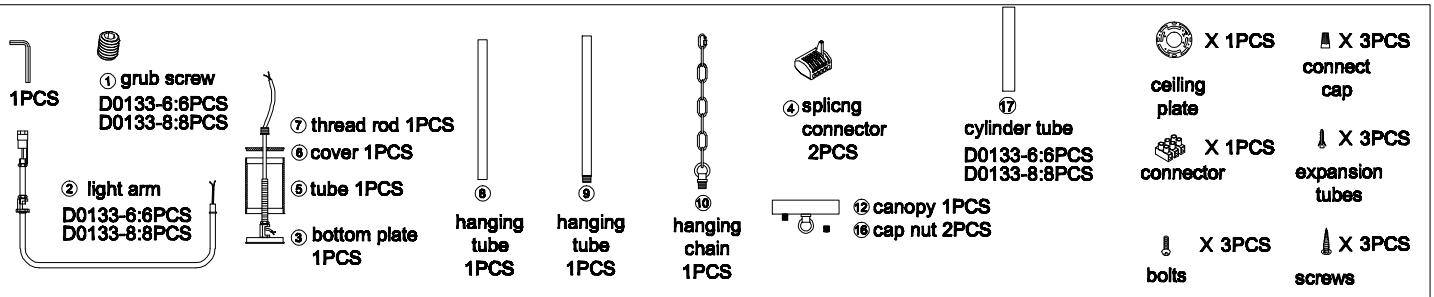

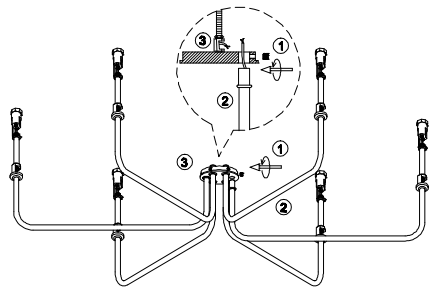

1.Install the arms ② to the bottom plate ③ by grub screw ①, and adjust the arms to the right position.



1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)

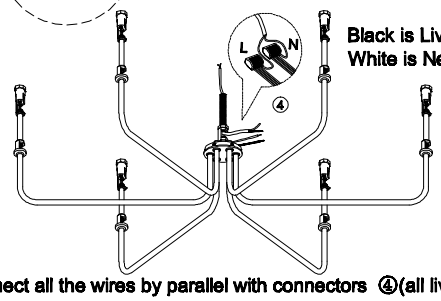

Black is Live Line
White is Neutral Line

2.Connect all the wires by parallel with connectors ④(all live line-L use one connector, and neutral Line-N use another connector).

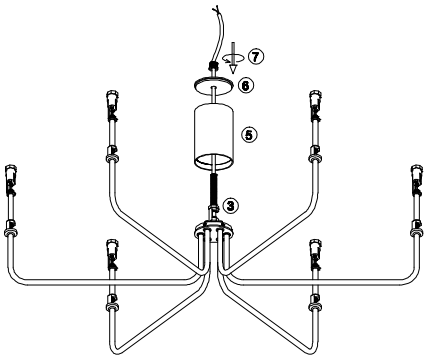

3.Install the cover ⑥ and the tube ⑤ on the bottom plate ③ with thread rod ⑦.

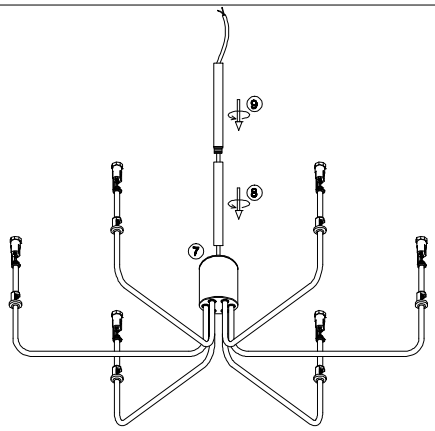

4.Let the wire go through the tube ⑧ and tube ⑨, rotate to fix two tubes on thread rod ⑦.

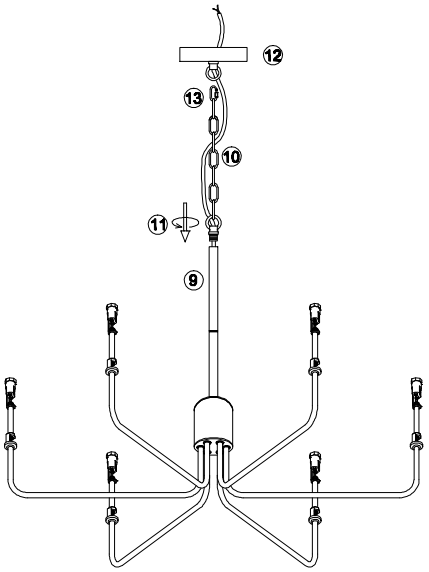

5.Let the wire go through the ring ⑪ of the chain ⑩, rotate the ring ⑪ to fix chain ⑩ to the fixture, connect the chain ⑩ to the canopy ⑫ by carabiner hook screw connection ⑬, let the wire go through the chain ⑩ and canopy ⑫.

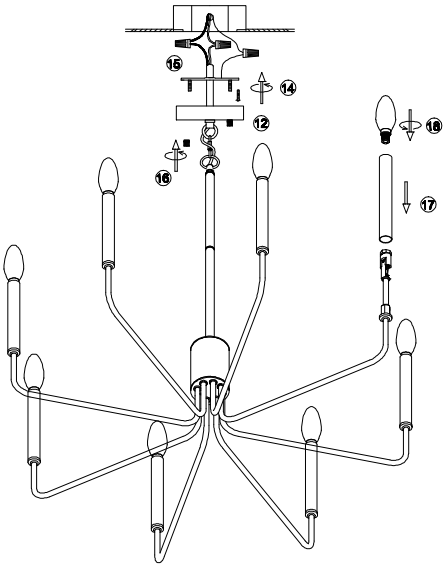

5.Install the bracket ⑭ to the ceiling junction box.
6.Connect the wire ⑮ to your home line.
7.Install the fixture to the bracket with cap nuts ⑯.
8.Put the cylinder tubes ⑰ on the lampholder and install the bulbs ⑱.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !