

Instructions

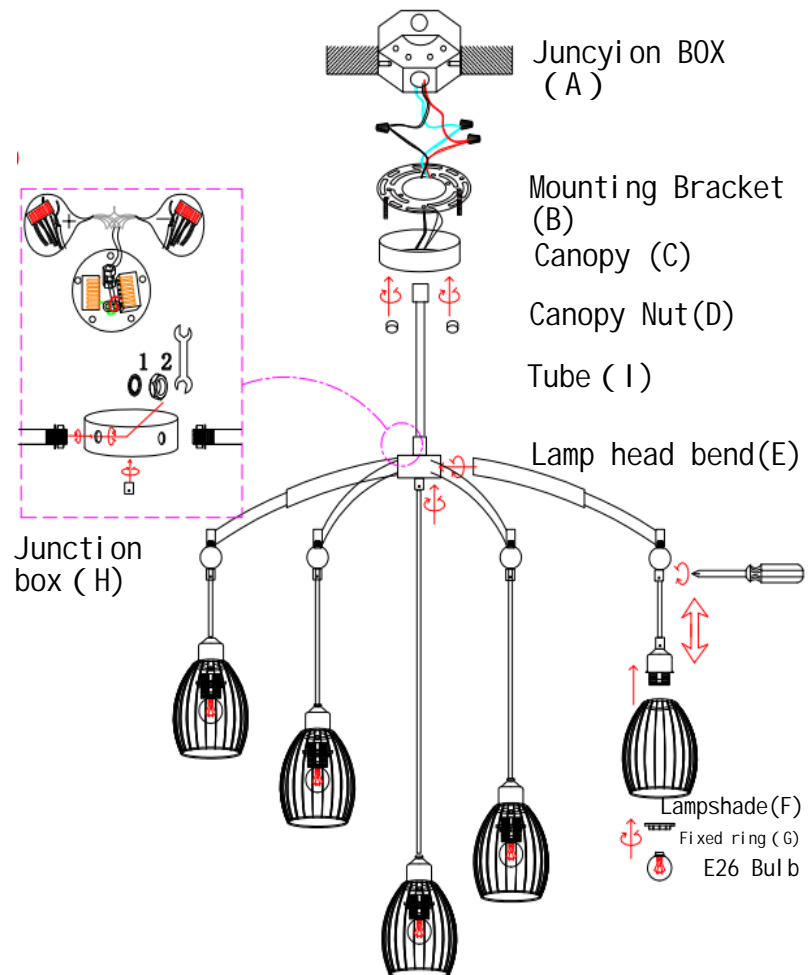
⚠ WARNING



- Check for electric, gas, & plumbing lines before drilling or consult a professional.
- Turn off your electricity at the circuit breaker or main fuse box before installation. Do not restore power to the line until the light has been fully installed.
- Do not use with bulbs exceeding the recommended wattage.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

ASSEMBLY

It is recommended to use two or more persons during the assembly process.

1. Fix the lamp head bend (E) to the junction box (H) with a nut
2. Connect the wires using wiring terminals according to the wiring diagram
3. Connect the Tube (I) and choose the length you need
4. Connect Canopy (C)
5. Fix the installation bracket (B) to the junction box (A)
6. Use wiring caps to connect the power and ground wires.
Pay attention to the distinction between positive and negative poles
7. Use Canopy Nut (D) to fix Canopy (C) to Junction box (A)
8. Use Fixed Ring (G) to fix Lampshade (F)
9. Twist in the E26 bulb and complete the installation.
10. The power cord of the lamp head can be adjusted in length according to one's own preferences



d1		x 3
d2		x 2

E26 Socket Max
.60W Bulbs
(not included)