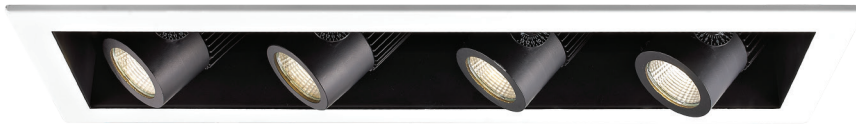


MT-4LD4 - 4 Light

4" LED Precision Multiples Energy Star®

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Retractable, adjustable spot lights

FEATURES

- ELV and 0-10V dimming options
- Energy Star® rated
- Invisible Trim™ is designed to sit flush with the ceiling for a clean, architectural look
- Fully retractable from housing
- 365° horizontal rotation and 180° vertical aiming
- Accepts 1 replacement lens
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Die-cast aluminum heat sink painted black. Trim, housing and junction box are 20 gauge steel. Frame and hanger bars are heavy gauge galvanized steel.

J-Box: Seven knockouts and four Romex® style wiring connectors provided for ease of installation. Rated for branch wiring.

Driver: Universal (120V - 277V) or 120V input only

Light Source: High output LED (included with housing)



Dimming: 0-10V or ELV (see list of housings below)


Mounting: Supplied with hanger bars, adjustable from 14½"-25" to accommodate various joist construction and grid sizes. Hanger bars include a captive mounting "screw-nail" for ease of installation. Accommodates surface up to 1" thick. 19⅞" × 5⅞" cutout with trim, 19⅞" × 5⅞" cutout for Invisible Trim™. See instruction sheet for details on installation using spackle ring.

Finish: Abrasion resistant powder coat paint in Black (BK).

Standards: ETL & cETL listed.



TRIMS

		MT-4LD416T Trim	WT White BK Black
		MT-4LD416TL Invisible Trim™	WT White



Example: **MT-4LD416T-BK**

HOUSINGS

	Power	Beam	Color Temp	CRI	Interior
	MT-4LD416N 0-10V dimming Non-IC, 120V-277V input 16.5W	S 20° F 40°	27 2700K 85	BK Black	
	MT4LD416NE ELV dimming Non-IC, 120V input 16.5W		927 2700K 90		
			30 3000K 85		
			930 3000K 90		
			35 3500K 85		
	MT4LD411NE ELV dimming IC-Rated, 120V input 11.5W		40 4000K 85		



Example: **MT-4LD416NE-S927-BK**

REPLACEMENT LENS

Amber	LENS-16-AMB
Blue	LENS-16-BLU
Green	LENS-16-GRN
Red	LENS-16-RED
Yellow	LENS-16-YEL

UV Filter	LENS-16-UVF
Frosted	LENS-16-FR
Spread	LENS-16-SPR
Beam Elongator	LENS-16-BEL

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center







1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585

MT-4LD4 - 4 Light

4" LED Precision Multiples Energy Star®

WAC LIGHTING
Responsible Lighting®

LUMINAIRE PERFORMANCE	Power	Beam	Photometry	Color Temp	CRI	Lumen	CBCP
MT-4LD416N 0-10V dimming Non-IC, 120V-277V input	16.5W	S 20°		27 2700K 85 3680 4490 x4 927 2700K 90 3160 3605 x4 30 3000K 85 3840 4790 x4 930 3000K 90 3260 3910 x4 35 3500K 85 3900 4720 x4 40 4000K 85 4400 5370 x4			
		F 40°		27 2700K 85 3620 2015 x4 927 2700K 90 3140 1615 x4 30 3000K 85 3760 2090 x4 930 3000K 90 3200 1705 x4 35 3500K 85 3840 2110 x4 40 4000K 85 4320 2390 x4			
MT4LD416NE ELV dimming Non-IC, 120V input	16.5W	S 20°		27 2700K 85 3740 4506 x4 927 2700K 90 3040 3545 x4 30 3000K 85 3888 4630 x4 930 3000K 90 3560 4170 x4 35 3500K 85 4020 4700 x4 40 4000K 85 3940 4700 x4			
		F 40°		27 2700K 85 3840 1955 x4 927 2700K 90 3000 1605 x4 30 3000K 85 3920 2110 x4 930 3000K 90 3600 1890 x4 35 3500K 85 3960 2095 x4 40 4000K 85 3940 2115 x4			
MT4LD411NE ELV dimming IC-Rated, 120V input	11.5W	S 20°		27 2700K 85 3060 3315 x4 927 2700K 90 2480 2685 x4 30 3000K 85 2740 3575 x4 930 3000K 90 2540 2795 x4 35 3500K 85 3200 3550 x4 40 4000K 85 3560 3925 x4			
		F 40°		27 2700K 85 3060 1670 x4 927 2700K 90 2440 1270 x4 30 3000K 85 3060 1590 x4 930 3000K 90 2500 1295 x4 35 3500K 85 3140 1640 x4 40 4000K 85 3540 1820 x4			

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585