
ASSEMBLY INSTRUCTION




Parts List for Two Chairs

Customer Service If there are missing part or broken parts, or if you need futher assistance,please contact customer service online.

Notice: 1. Tighten screws to 50% before fully fixing them.
2. Place the item on a flat surface to adjust and ensure stability.
3. Gradually tighten all screws with tools.
4.If the screws do not align with the holes during assembly, loosen all other screws to 50% and continue the assembly process.
5. If the item is not stable, please loosen all the screws, adjust it on a flat ground and tighten up all screws again.


A 	B 	C 	D 
Seat *2 pcs	Backrest*2 pcs	Crossbar *2pcs	Left Armrest *2pcs
E 	F 	G 	H 
Right Armrest *2pcs	Base*2pcs	Connector*4pcs	Washer* 4pcs

Screw packs for Two ChairsParts

I 	J 	K 	L 	M 
M8*40mm Screw*16pcs	Big Washer* 16pcs	Lock Washer*28pcs	Nut* 28pcs	Stud*4pcs
N 	O 	P 	Q 	R 
Small Screw*8pcs	Small Washer* 16pcs	M6*16 Screw* 16pcs	Round Head Screw *8pcs	Medium Washer*12pcs
S 	T1 	T2 	U 	V 
Big Screw*8pcs*8pcs	Big Allen Wrench*1pc	Small Allen Wrench*2pcs	Wrench*2pc	Nut Cap*4pcs
W 	X 			
Rubber Plug* 12pcs	Cushion*2pcs			


ASSEMBLY INSTRUCTION

Step1

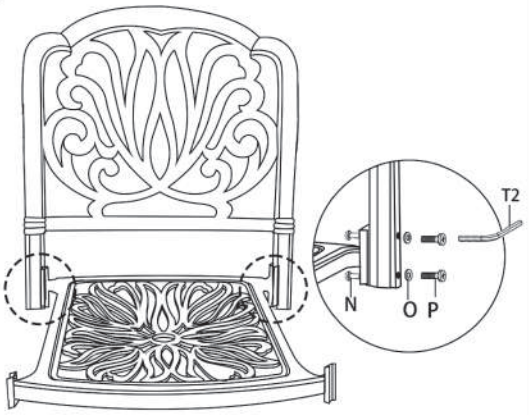

Step1:Insert B into A and tighten it with N+P+O


Step2

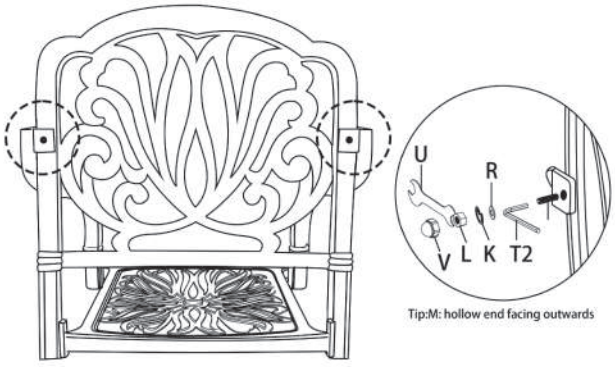

Tip:M: hollow end facing outwards


Step2: Attach M to the back of B, then align the holes of the arm-rest (D/E) and secure them using R+K+L . Tighten and cover V.

Step3

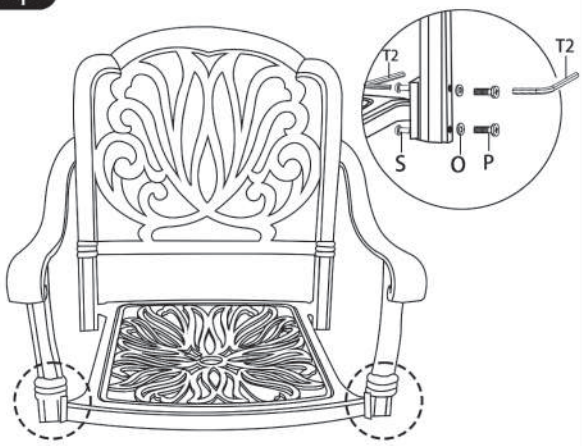


Step3:Connect D and E to A and tighten it with S+P+O

Step4

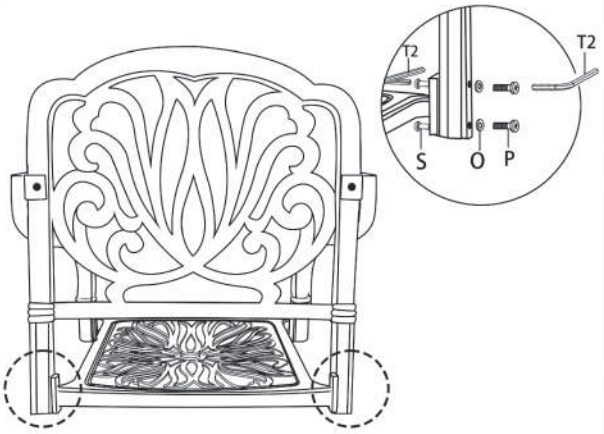

Step4:After completing the assembly of the seat back, tighten all screws using T2.
Tip: Hold one wrench steady while turning the other.


Step5

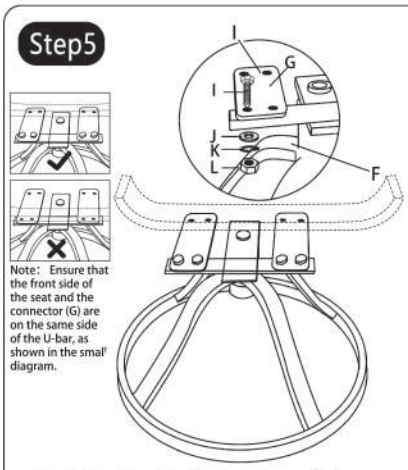

Note: Ensure that the front side of the seat and the connector (G) are on the same side of the U-bar, as shown in the small diagram.

Step5: Place G on F to align the holes and tighten with I+J+K+L.
Notice: The crossbar of the T-connector on the swivel base should face the front of the seat, and the vertical bar along with the two C-pieces should be on the same side of the crossbar, facing the back of the seat (towards the backrest)


Step6

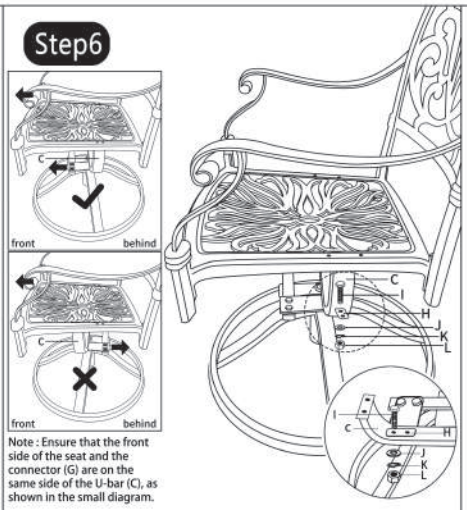

Note : Ensure that the front side of the seat and the connector (G) are on the same side of the U-bar (C), as shown in the small diagram.

Step6: Put the H on the G first. And then place C on top of G and tighten with I+J+K+L

Step7

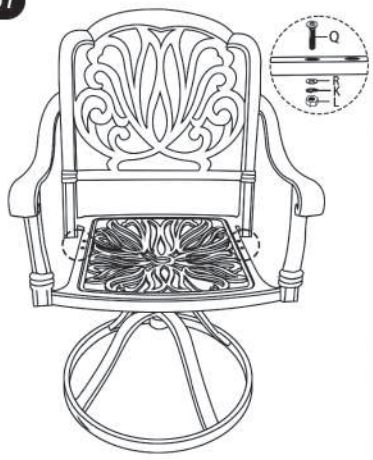

Step7: Place the seat on top of C and tighten with Q+R+K+L