


ASSEMBLY INSTRUCTION

Ax1	Fx1
Bx1	Gx4
Cx1	Hx16
	M6*10mm
Dx2	Ix4
	M6*25mm
Ex1	Jx1

STEP 1

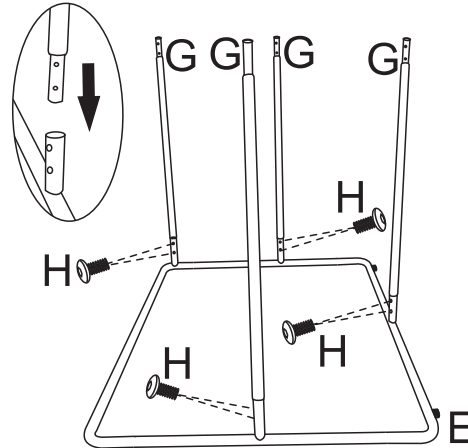


Hx8



M6*10mm


Connect (G) and (E) as displayed, then tighten Screw (H).

STEP 2

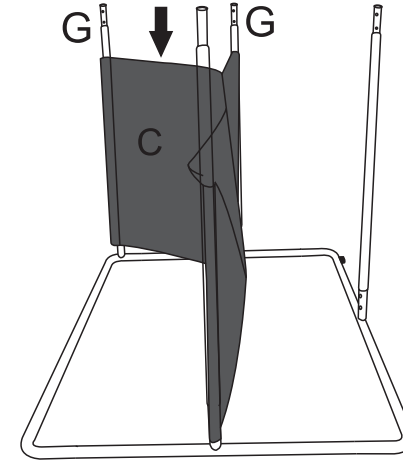

Insert (G) into the holes on (C) as displayed. The longer side should be on the front side.

STEP 3

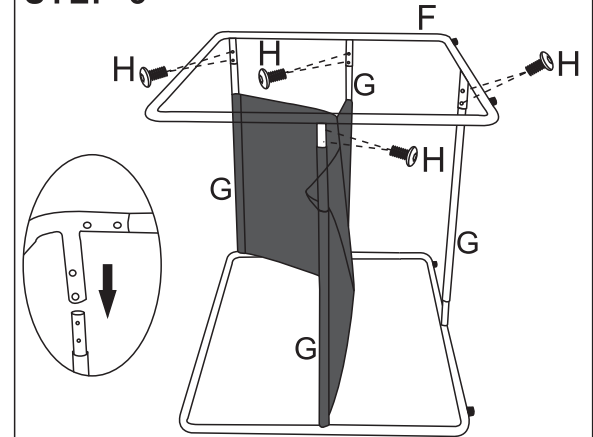


Hx8



M6*10mm


Connect (G) and (F) as displayed, then tighten Screw (H).

STEP 4

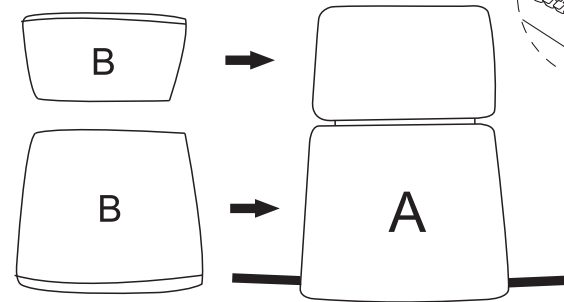

Remove the Cushion (B) from the packaging, unzip the Cover (A), and stuff the seat cushions into the cover correspondently.

STEP 5

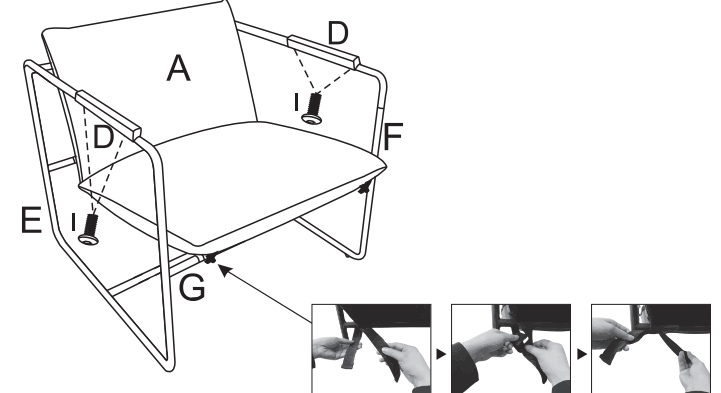

Ix4



M6*10mm

Twist Screw (I) to connect (D) with (E)(F). Put the cushion in place, then tie the rope to pipe(G) as displayed.

The Cushion (B) is difficult to put back in its original packaging. Please don't open it if you are hesitant about keeping the product.