
ASSEMBLY INSTRUCTIONS

Note:No climbing on the back of the chair!

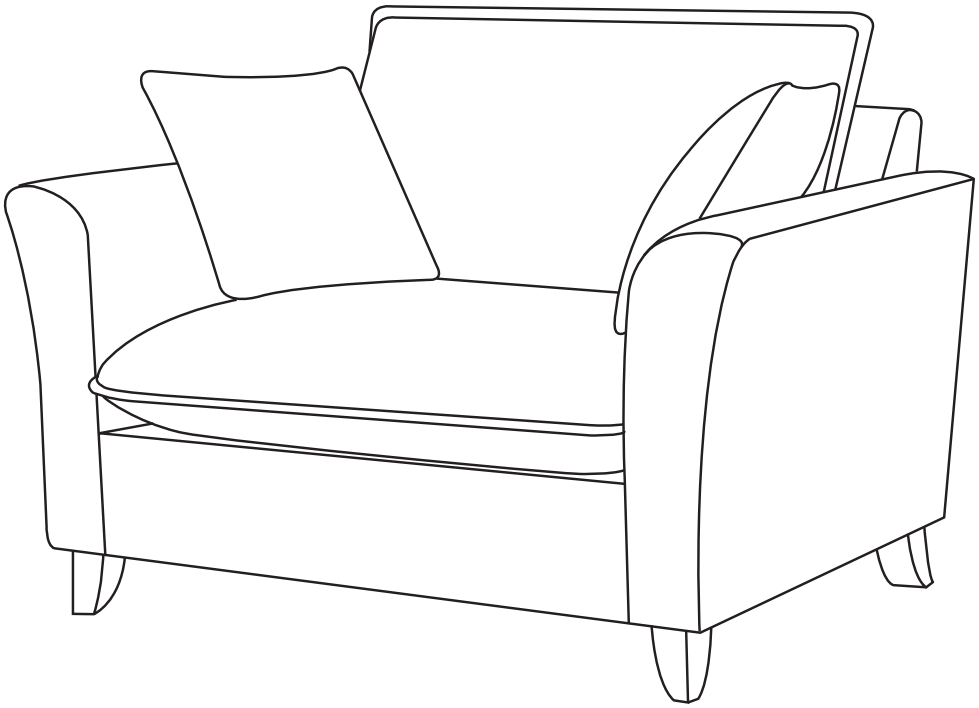

Care & Maintenance

 Do not put hot items directly on furniture surface

 Do not clean furniture with harsh cleansers or polish

 Do not place furniture under direct sunlight

 Do not place furniture near heating or cooling vents

 Do not write on furniture without a padded barrier to protect the surface

 Do not place furniture outside. For indoor use only

 Not for commercial use. For residential use only

 Stains may be removed with mild soap solution and damp cloth


 Children should not climb or jump on the furniture

 Dust and pick-up spills using a clean, non-colored, lint-free cloth







Caution

● This product contains small components. Please ensure that they are kept away from small children.

● Do not use power tools to assemble your furniture. Power tools may strip or damage the parts.



PARTS LIST:


Label	Picture	Description	QTY
A		Backrest	1
B		Left Armrest	1
C		Right Armrest	1
D		Spring Seat Frame	1
E		Seat Cushion	1
F		Back Cushion	1
G		Arm Pillow	2
H		Front Leg	2
I		Back Leg	2
J		Front Rail	1


HARDWARE LIST:

Label	Picture	Description	QTY
①		Plastic Washer	4
②		Rubber Washer	2
③		Allen Wrench (S5)	1

Assembly Preparation:


























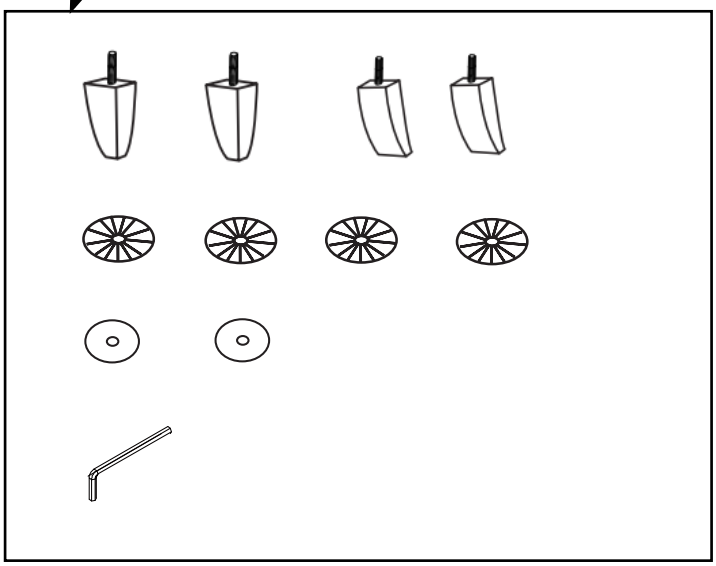


ASSEMBLY STEPS:


Step 1

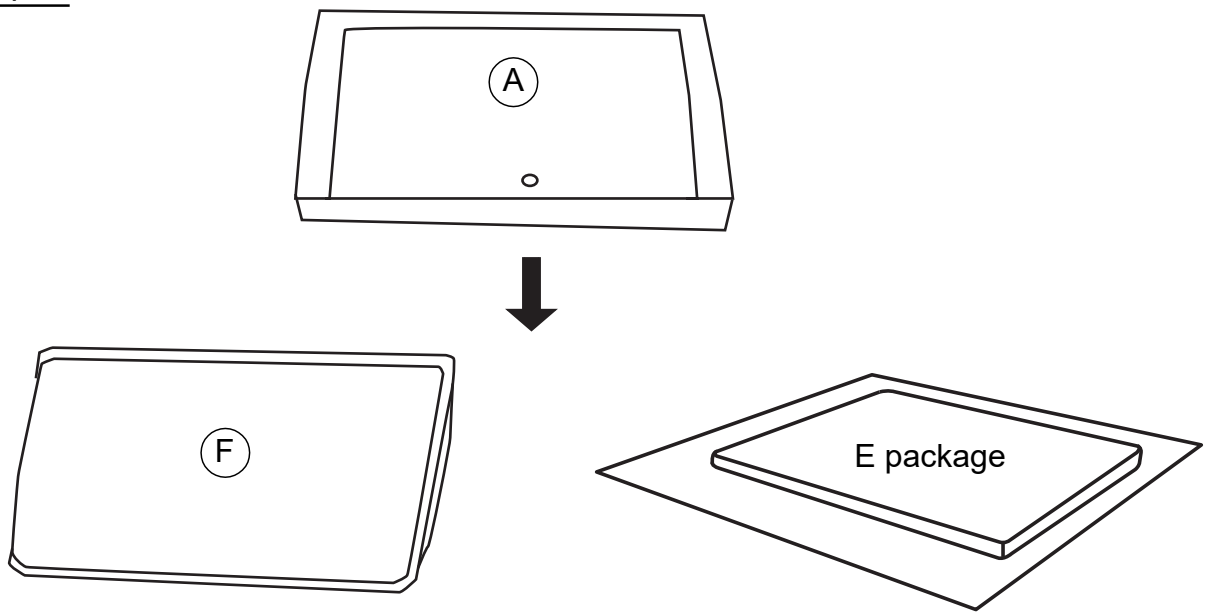


Take out the Back Cushion(F) and Seat Cushion (E)Package from Backrest (A).

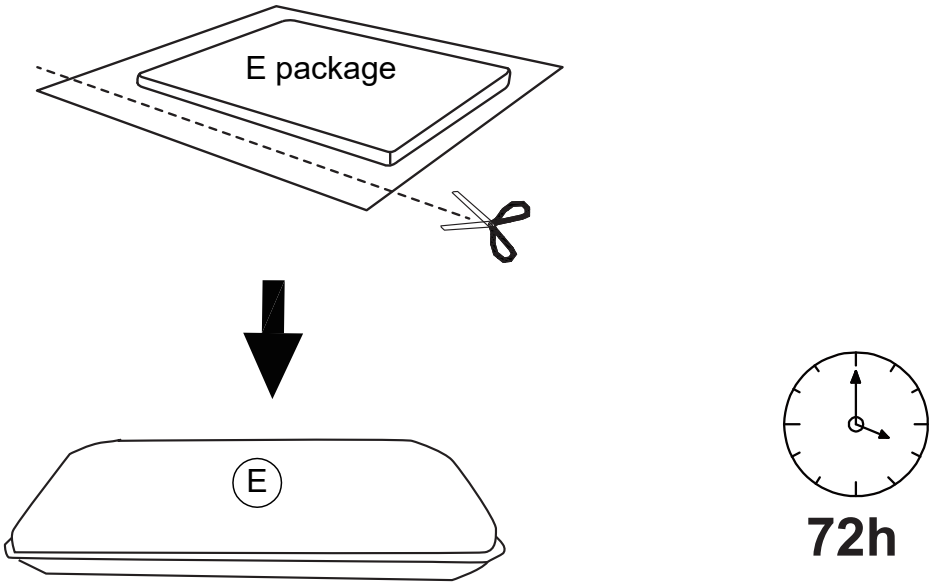

Step 2

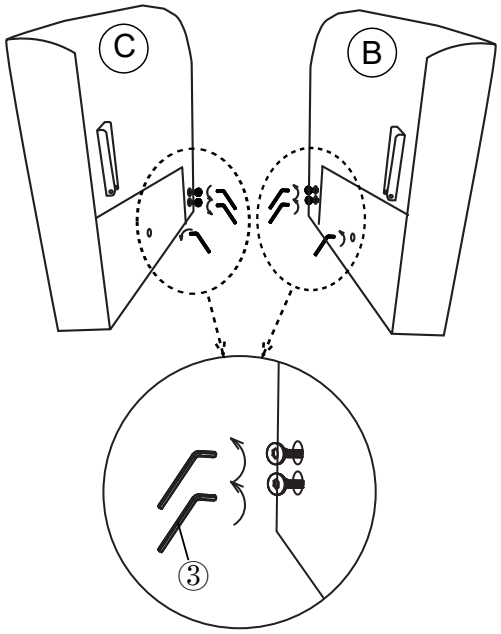


Loosen the bolts 50%.

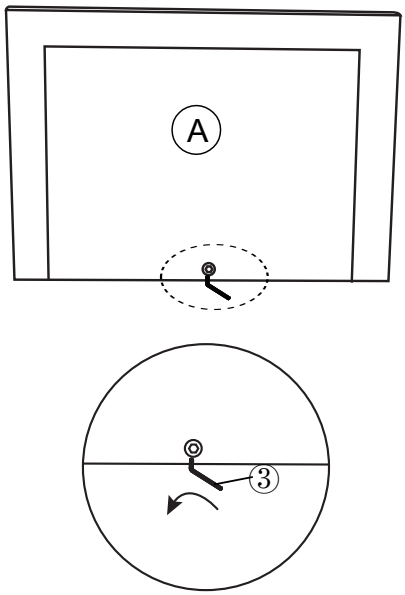

Loosen the bolt 50%.


Step 3

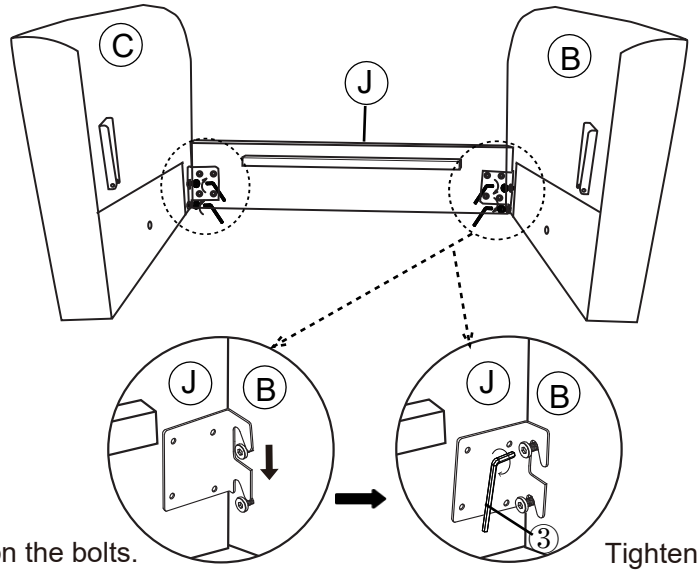


Hang on the bolts.

Tighten the bolts.

Step 4 Slide the Tapered Connectors on the Backrest(A) into the Tapered Connectors on the Left Armrest(B) and the Right Armrest(C) as shown.

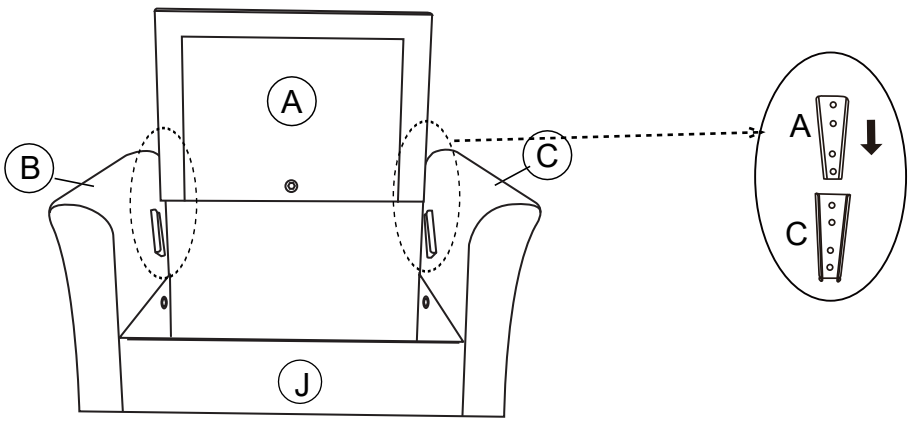


Step 5

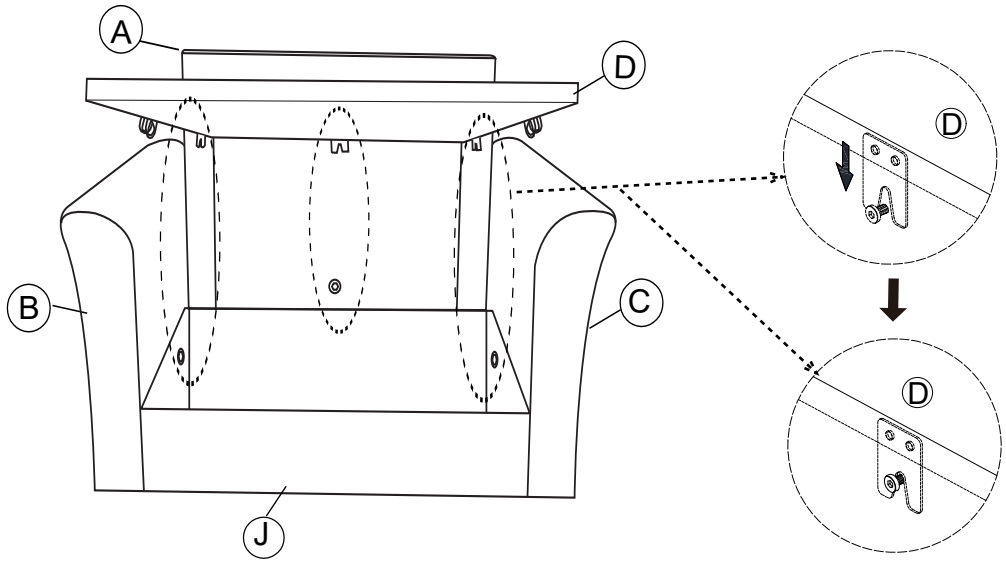

Put the Spring Seat Frame (D) on the chair.

Step 6


Tighten all the Bolts under the Spring Seat Frame(D) in this step.

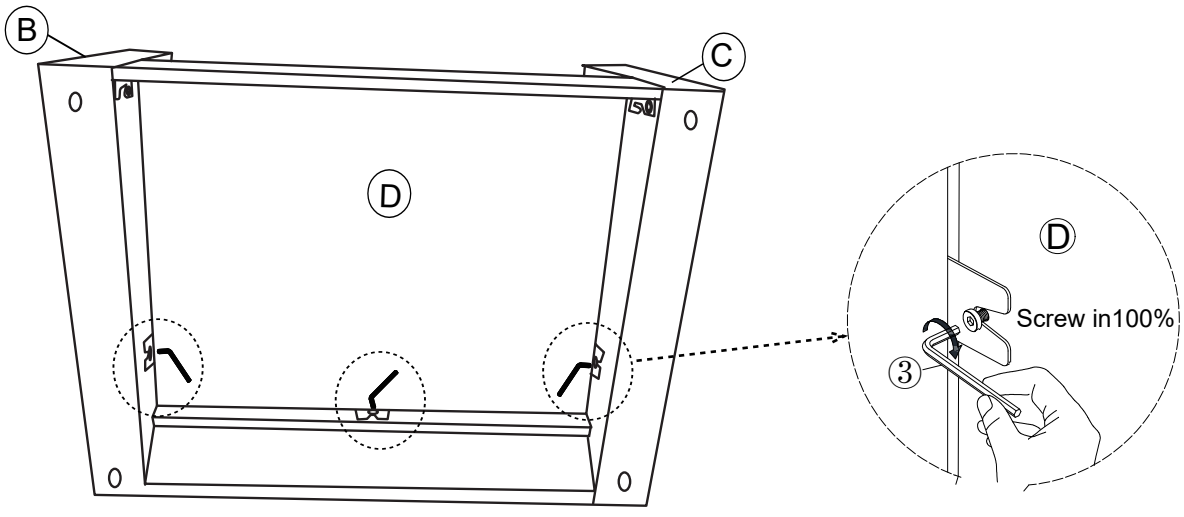


Step 7

Place one Plastic Washer(①) and Rubber Washer (②) on the Back Leg(I) screw,then insert screw into the mounting hole at the corner of the chair. Tighten by turning the leg clockwise as shown. Repeat the same steps to install the other Back Leg(I).


Place one Plastic Washer(①)and on the Front Leg(H) screw,then by the same method as Back Leg to install the Front Leg(H).

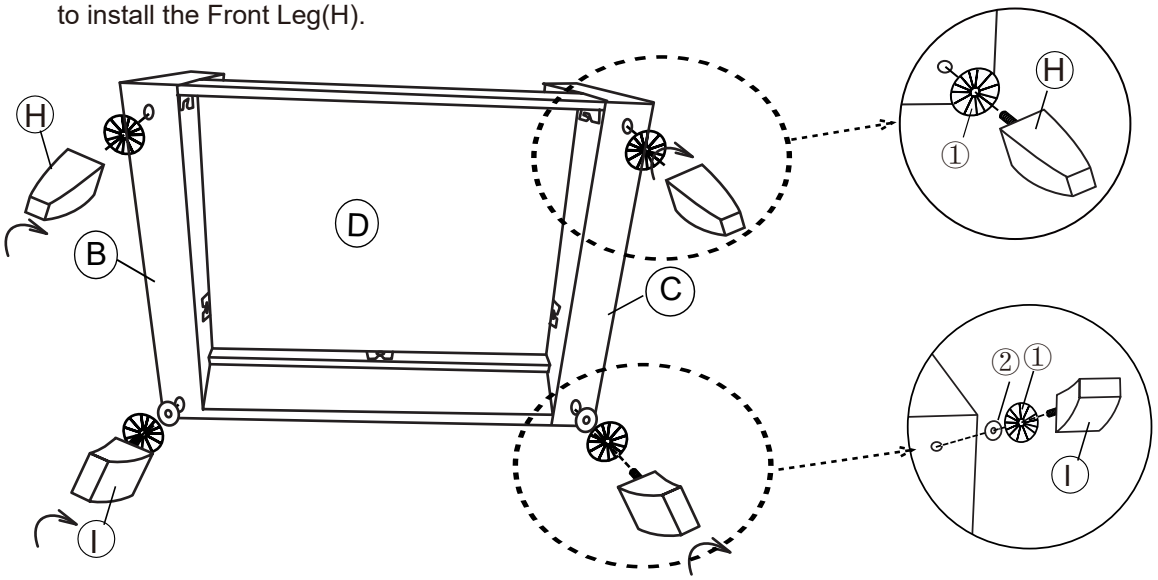

Step 8 Place the Seat Cushion(E) on the chair.

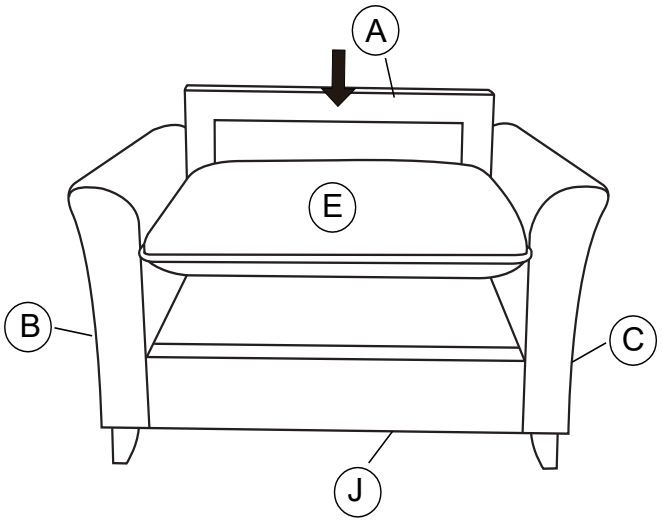

Step 9 Place the Back Cushion(F) and Arm Pillows(G)on the chair.

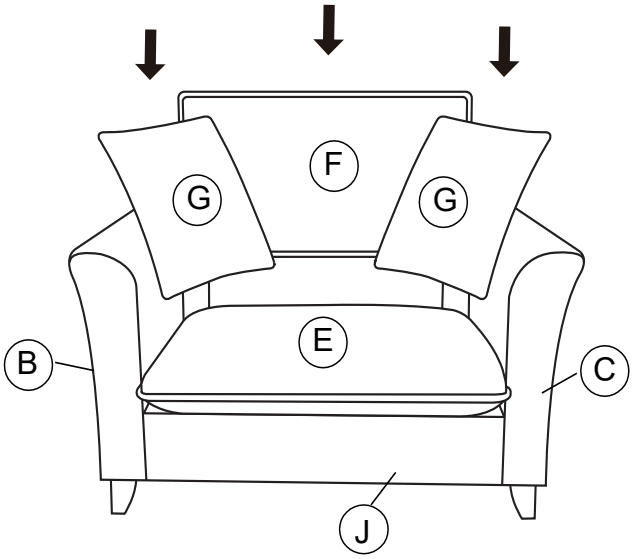

Step 10 Your Chair is ready for use.

