


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

Model:CA2560-JES-5

**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE**

NOTES: 1.Before installing, consult local electrical codes for wiring and grounding requirements.  
2.READ AND SAVE THESE INSTRUCTIONS.

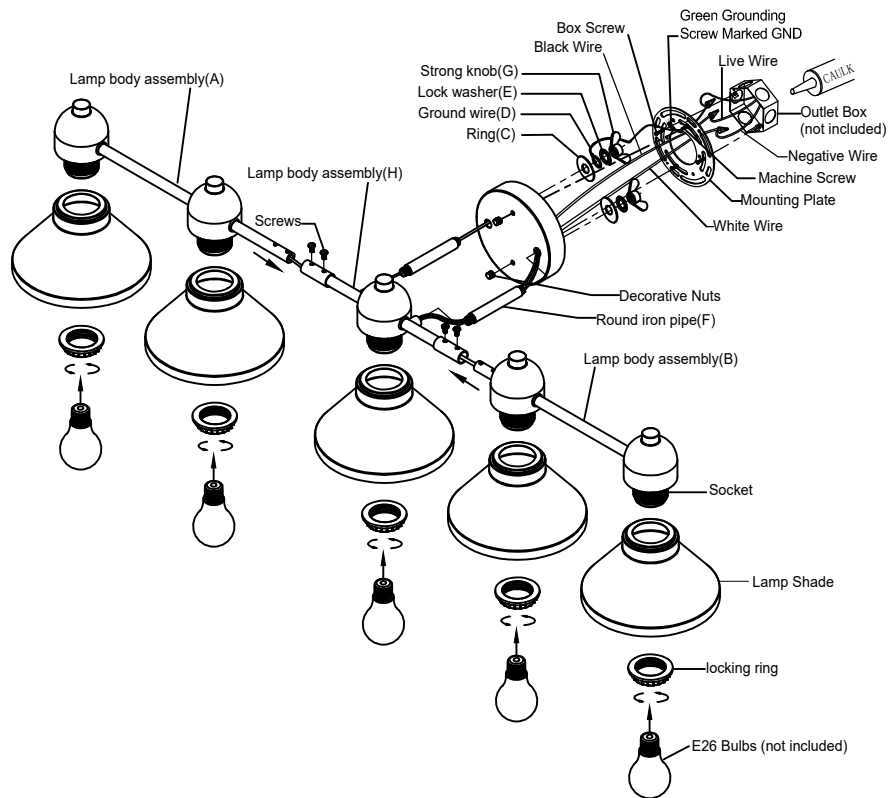

- 1.Attach the mounting plate to the outlet box by using two mounting screws.
2. Insert the lamp body assembly (A) (B) into the lamp body assembly (H) and tighten it with two screws (as shown in the figure).
3. Twist the nipple into the lamp body assembly (H), insert it into the iron tube (F), insert the nipple into the back plate, then sequentially insert the ring (C), grounding wire (D), and locking washer (E), and lock it with a butterfly nut (G) (as shown in the figure)
- 4.Pull out the wires and grounding wire from the outlet box. Make wire connections using the wire nuts, as follow:
  - Connect the hot wire(usually black insulation)from the fixture to the black wire from the power source.
  - Connect the neutral wire(usually white insulation)from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire(usually green insulation or bare wire)to the mounting strap with the green grounding screw.Then connect it to the house grounding wire with the wire nut.Carefully put the wires back into the outlet box.
- 5.Insert two mounting screws, connect the back plate to the mounting plate, and secure it with two decorative nuts
- 6.Unscrew the locking ring from the socket. Then install the lamp shade onto the socket and tighten it with the ring.
- 7.Install five E26 bulbs(bulbs is not included).

**CAUTION:** With silicone caulking compound, caulk completely around where the back plate meets with the wall surface to prevent water from seeping into the outlet box.

Turn on the power at fuse or circuit box.