


# ASSEMBLY AND INSTALLATION INSTRUCTIONS


**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.**

## NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

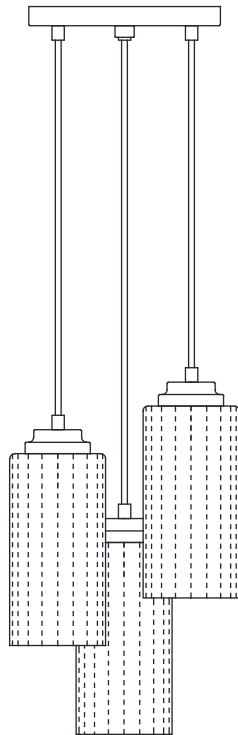


## TOOLS REQUIRED




Flathead  
Screwdriver



Phillips  
Screwdriver



Ladder



Wire Strippers



Pliers



Electrical  
Tape



Wire Cutters



Safety Glasses

## PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.


# PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Wire nut	3
B	Outlet box screw	1
C	Mounting bracket	1
D	Mounting screw	2
E	Canopy	1
F	Flathead screwdriver	1

PIECE	DESCRIPTION	QUANTITY
G	Nut	1
H	Lock nut	1
I	Glass shade	3
J	Socket ring	3

## INSTALLATION

- Adjust wire length and screw tight by Flathead screwdriver(F).
- Attach the mounting bracket(C) to the junction box with the mounting screw (D).
- Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire, black to (black) and white to (white).

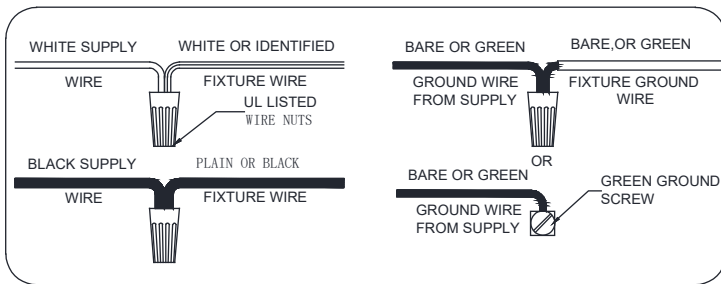

- Attach the canopy (E) to the mounting bracket (C) and lock it with nut (G), then lock it with lock nut (H).
- Attach the glass shade (I) to the socket with the socket ring (J), finally install the bulb (not included) into the socket.

If you have any questions, please contact us, our warmest customer service will assist you within 24 hours.

