

# Assembly Instruction Sheet

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses, marking pen, 1/16" drill bit, center punch, hammer, drill and wrench.

**Light Source:** (3) B10 Candelabra Base bulbs 60W Maximum.

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

## Package Contents

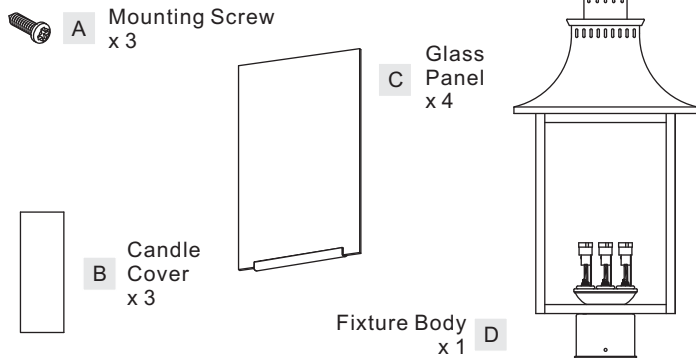

## STEP 1 – Remove Fixture Hood from Cage

A. Unscrew the finial and waterproof washer, remove the fixture hood from the Fixture Body (D).

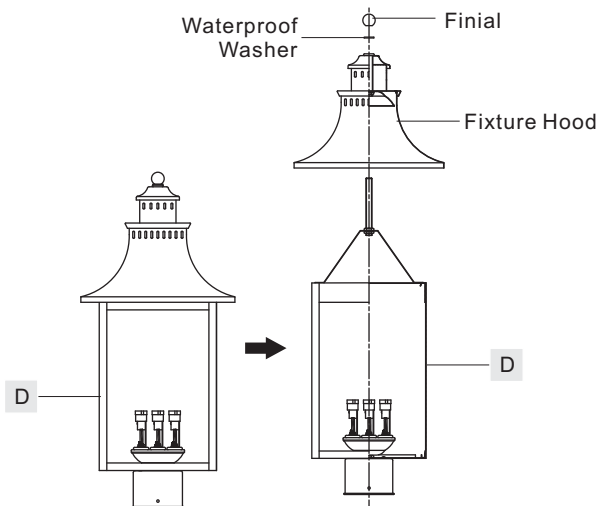


Figure 1

## STEP 2 – Install Glass Panels

A. Insert the Glass Panel (C) into the cage with U-shaped foam end downward. Secure by folding the tabs in the bottom and top edge of the cage to the bottom and top edge of the Glass Panel (C). Repeat for each Glass Panel (C).

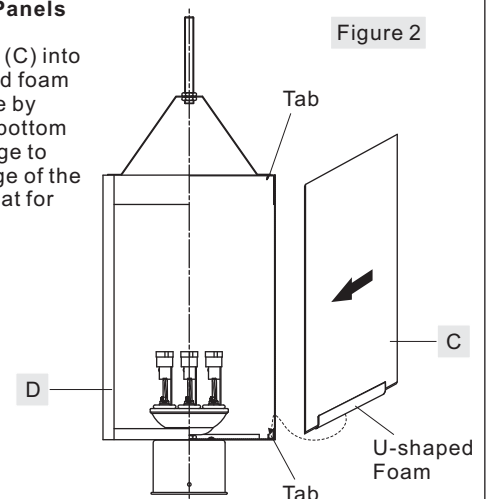


Figure 2

## STEP 3 – Install Candle Covers, Bulbs and Fixture Hood

A. Install the Candle Cover (B) to each socket.  
B. Insert bulbs onto sockets and screw snugly into place.  
C. Place the fixture hood back onto the top edge of the Fixture Body (D). Secure by threading the previously removed waterproof washer and finial back onto the fixture. Hand tighten until snug.

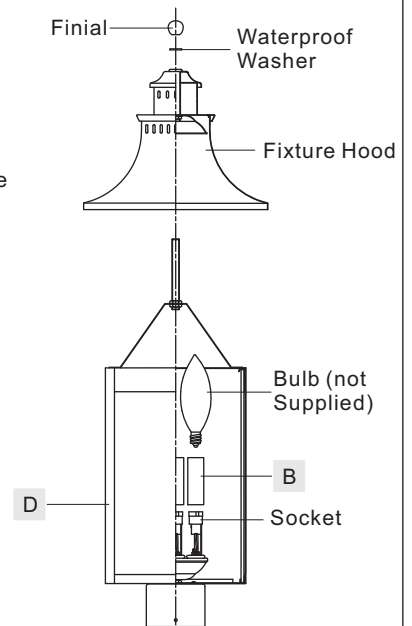


Figure 3

Thank you for purchasing product.

#### STEP 4 – Mark the Location for the 3 Mounting Holes

- A. Place the light fixture onto the post and mark the location of the 3 mounting holes on the fixture fitter onto the post with the marking pen.


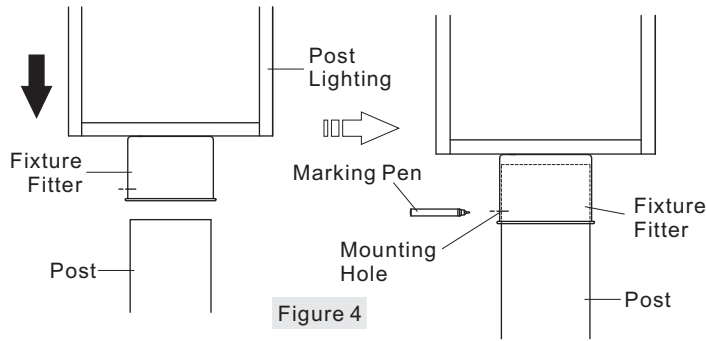


Figure 4

#### STEP 5 – Marking the Center of Each Mounting Hole

Figure 5

- A. Remove the light fixture. Using the center punch and hammer marking the center of each mounting hole location that is marked with the marking pen.

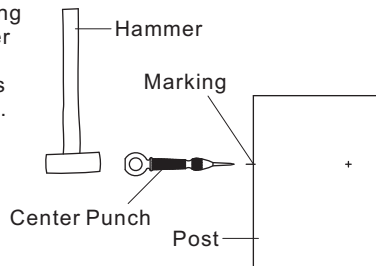

#### STEP 6 – Drill Holes

- A. Using the 1/16" bit and drill, drill a pilot hole completely through the post at each (3) locations marked in step 5 above.

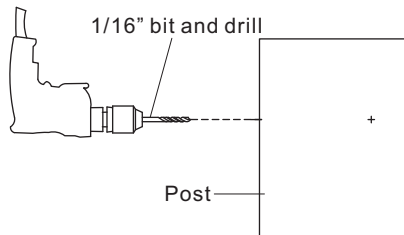


Figure 6

#### STEP 7 - Wire Connections

- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

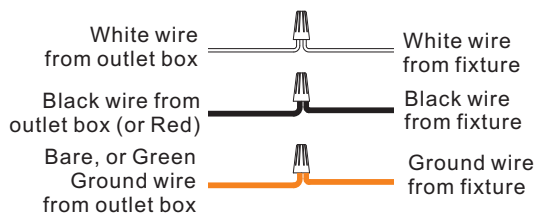


Figure 7

#### STEP 8 – Attach the fixture to the Post Mount

- A. Place the fixture on the post lining up the mounting holes on the fixture fitter with the holes on the post. Use the Mounting Screws (A) to attach the fixture to the post.

**Your fixture is now assembled and ready to use. Enjoy!**


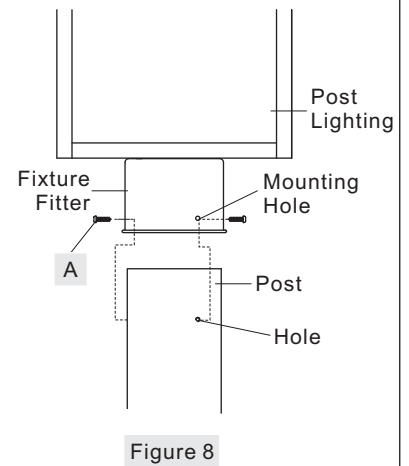


Figure 8

FINISH: MYSTIC BLACK

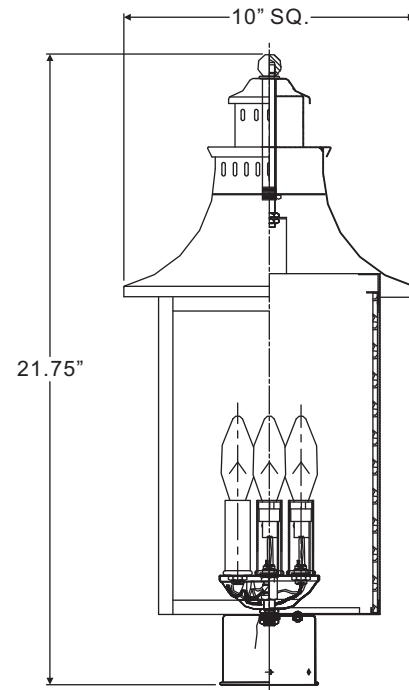

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"

Thank you for purchasing product.