










Accessories List

(A) Headrest 	(B) Backrest 	(C) Seat Cushion 	(D) 2 Armrests L  R
(E) Gas Lift 	(F) Central Base Tube 	(G) Split Base Tube 	(H) 5 Casters 
(I) Base Plate 	(J) Keel 	(K) Decorative Cover 	(L) 5 Screws (M6X20mm) 
(M) 6 Screws (M6X30mm) 	(N) 3 Screws (M8X35mm) 	(O) 4 Screws (M6X20mm) 	(P) 4 Screws (M6X18mm) 
(Q) Wrench 			

Notice [If you have any question, please contact primy-service@outlook.com]

- Do not stand in this chair or use the chair as a step ladder uses it as chair only. This chair is designed for one person to use at a time.
- This chair is designed for one person weighing up to 300lbs(136kg).
- Do not use this chair unless all bolts, screws and knobs are firmly secured.
- Check all bolts, screws and knobs every 90days. If the screws are loose, tighten them with a wrench.
- Failure to follow these instructions may result in serious injury of yourself and people around you.
- Some of the part are heavy and has shaped edge, please install it carefully to avoid hurting you and people around you.

Instructions for Use



Adjustable height of Backrest



Up and Down adjustment



Tilt function




Armrests 3D adjustment

Thanks for purchasing our products. Please read this manual before assembly.
And please assemble in order. After the assembly, keep the instruction properly.
Make sure all the parts are included (17 kinds in total).

Assembly Instruction


Please assemble in a wide and flat place.

Step 1

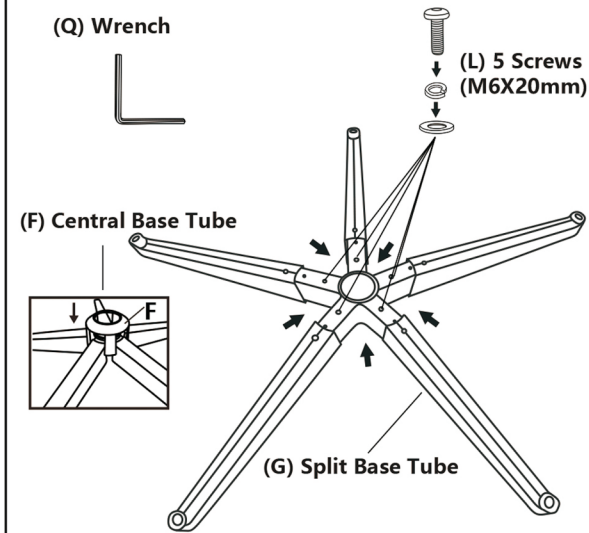


Take out Split Base Tube (G) and Central Base Tube (F). Insert Split Base Tube (G) into Central Base Tube (F) as shown. You can see in the Split Base Tube (G) and Central Base Tube (F) each have a screw hole, align them and tighten the 5 Screws M6X20mm (L) with Wrench (Q) to fix 5 Split Base Tubes (G) to Central Base Tube (F).

Step 3

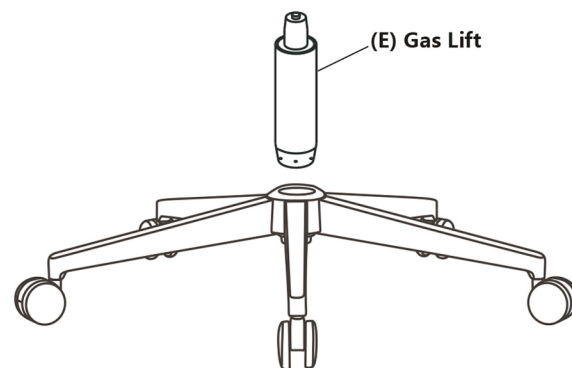


Take out Gas Lift (E), insert it into the hole of Central Base Tube (F) as shown. Put it aside and we'll use it in Step 8.

Step 2

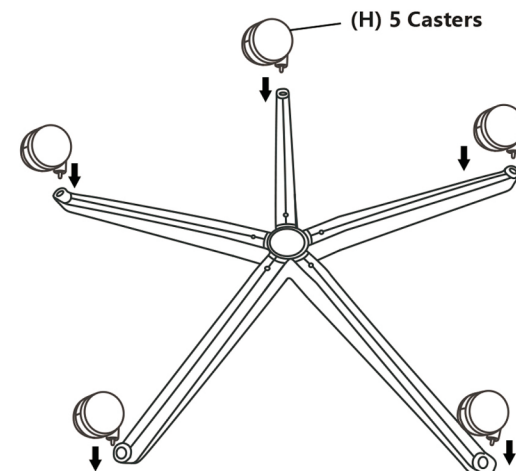

Take out 5 Casters (H), firmly insert them vertically into the hole of the Split Base Tube (G) as shown.


Step 4

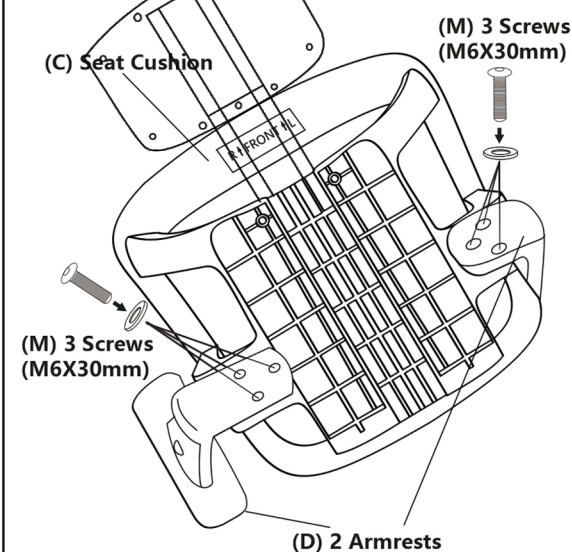

Then fix the bottom of Armrests (D) to the back of Seat Cushion (C). Tighten the 6 Screws (M6X30mm) (M) with Wrench (Q) firmly.


* Caution: There is a FRONT sticker on the Seat Cushion (C). The right armrest is engraved with the R logo, and the L logo is the left armrest, please install the armrest correctly.

Step 5

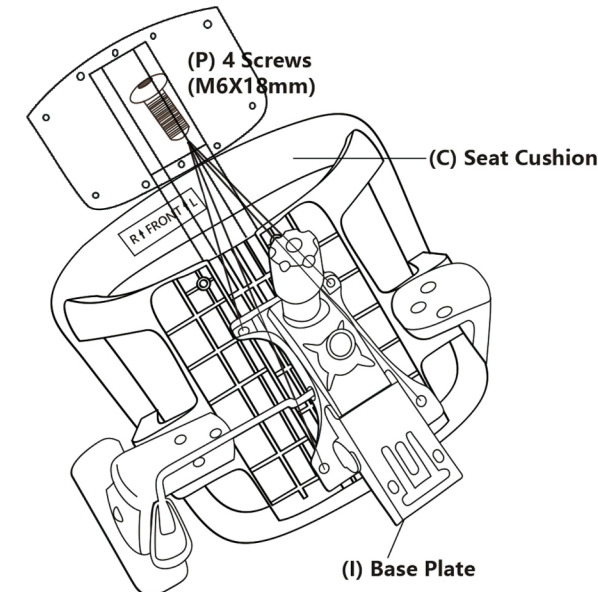


Connect the seat cushion (C) to the Base Plate (I) with 4 Screws (M6X18mm) (P).

Step 7

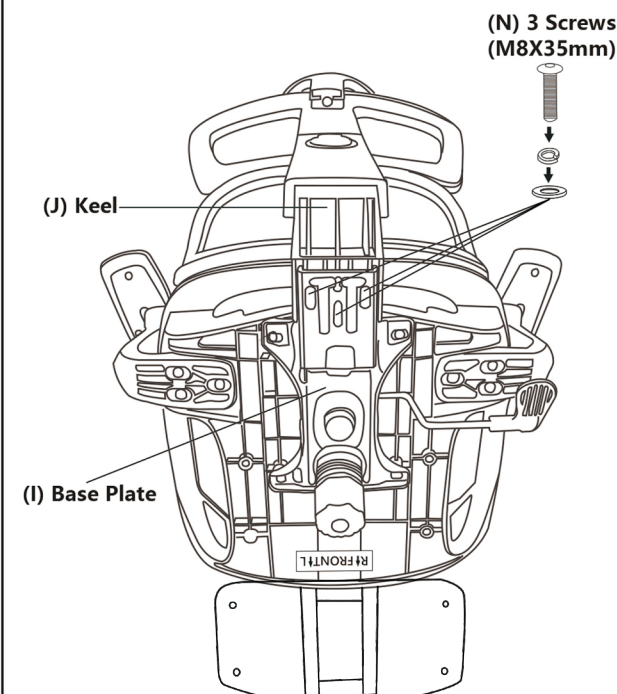


After step 6, connect the Base Plate (I) assembled in step 5 with 3 Screws (M8X35mm) (N) to the Keel (J) assembled in step 6 together as shown in the picture.

Step 6

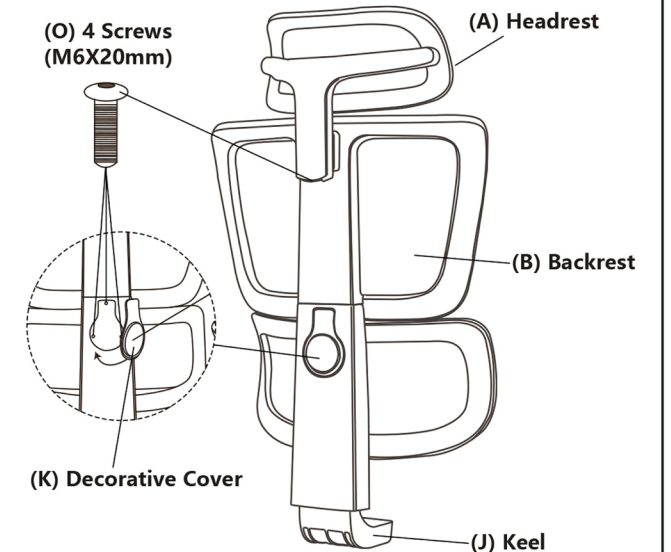

Next, take the Wrench (Q), assemble the Headrest (A) with the Backrest (B) with the one Screw (M6X20mm) (O). Then assemble the Backrest (B) and Keel (J) with 3 Screws (M6X20mm) (O), then cover the screws with the Decorative Cover (K).

Step 8

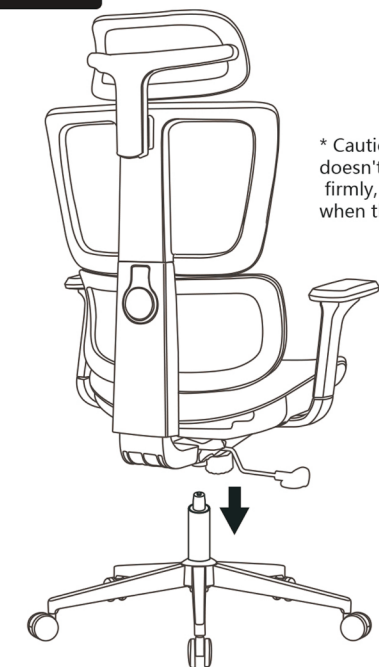

* Caution: If the Gas Lift (E) doesn't insert to Base Plate (I) firmly, it's likely to fall off when the chair rises up.

Finally, take a closer look at the holes in the Base Plate (I), lift firmly the upper part of the chair that you just assembled. And align the holes in the Base Plate (I) with the Gas Lift (E) assembled in step 3.