

# ASSEMBLY INSTRUCTIONS

ITEM NO: FX-3814-6

CAREFULLY PLACE ALL PARTS ON A SMOOTH SURFACE AND LAY THEM UP PER SKETCH BELOW.

*\* THESE INSTRUCTIONS ARE PROVIDED FOR YOUR SAFETY PURPOSE AND IT IS VERY IMPORTANT THAT THEY ARE READ COMPLETELY BEFORE BEGINNING THE INSTALLATION OF YOUR FIXTURE.*

*\* DIRECT WIRE FIXTURES: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.*

SHUT OFF MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER.

1. SCREW POLE (L) TO POLE (H) AND POLE (H) TO LIGHTING BODY (I).

2. INSTALL 4PC ARC POLES (K) TO LIGHTING BODY (I) WITH SET SCREW (J). MAKE SURE SIDE #1 OF THE ARC POLE (K) IS INSTALLED UNDER THE SOCKET(OUTSIDE), AND SIDE#2 IS IN INSIDE.

3. INSTALL MOUNTING BAR (A) TO JUNCTION BOX WITH MOUNTING SCREWS(B).


4. PUT WIRE THROUGH CANOPY (D) AND MOUNTING BAR (B) AND MAKE WIRE CONNECTIONS: CONNECT THE GREEN GROUND WIRE "⌚", CATHODE WIRE "N" IN WHITE, ANODE WIRE "L" IN BLACK TO THE SUPPLY WIRES IN THE JUNCTION BOX AS ILLUSTRATED WITH WIRE NUTS.

5. ALIGN THE CANOPY (D) TO THE MOUNTING BAR(B) AND TIGHTEN WITH SIDE SCREWS (E).

6. JOIN THE CANOPY (D) AND LIGHTING FIXTURE(I) WITH CHAIN (G) USING CHAIN LINK UNIT (F).

7. INSTALL RECOMMENDED BULBS (NOT INCLUDED IN THIS PACKAGE).

TURN OF POWER AND ENJOY!

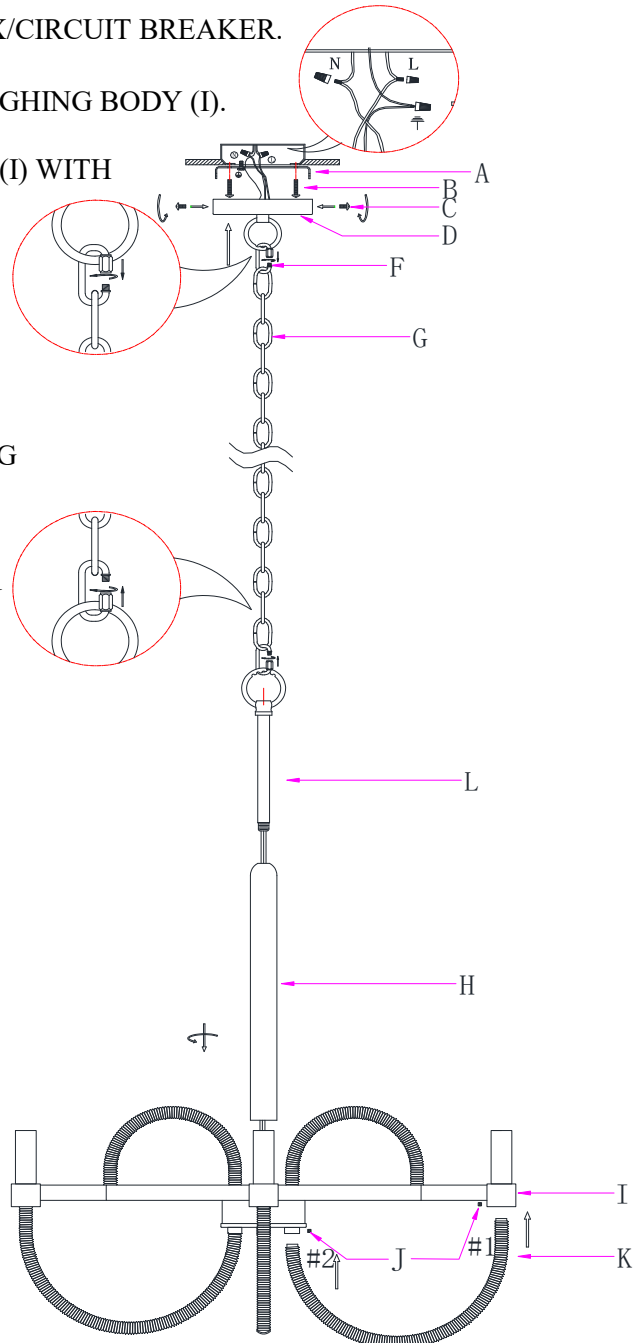

**Use Max 60W X 6 Type B  
Bulbs (Bulbs Not Included)**

## TO REPLACE THE BULB:

TURN OFF POWER (UNPLUG FROM THE WALL OUTLET) BEFORE REPLACING THE BULB(S), MAKING SURE THE BULB(S) HAVE SUFFICIENT TIME TO COOL DOWN.

DO NOT SUBJECT THIS FIXTURE TO ANY SHOCK WHILE LIT AS SHATTERING OF BULBS MAY RESULT .

## CARE INSTRUCTIONS:

TO CLEAN, USE A SOFT CLOTH ONLY. DO NOT USE ANY CHEMICAL OR ABRASIVE CLEANERS.

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.**