

INSTALLATION INSTRUCTION FOR FIXTURE

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from wall. Including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Attach the mounting plate (A) to the outlet box using the outlet box screws (B). The side of the mounting plate marked "GND" must face out.

CONNECTING THE WIRES (FIG. 2)

4. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire nuts are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.
5. Tuck the wire connections neatly into the wall outlet box.

ASSEMBLE THE FIXTURE (FIG. 1)

6. Attach the fixture backplate (C) onto the outlet box by protruding mounting screws (D) through mounting holes on the backplate (C) and secure with ball nuts (F).
7. Place the glass shade (G) over the socket (E), then secure with socket ring (H) tightly.
8. Install the bulb in accordance with fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1

-Mounting Plate

-Ground screw

-Mounting screws (2)

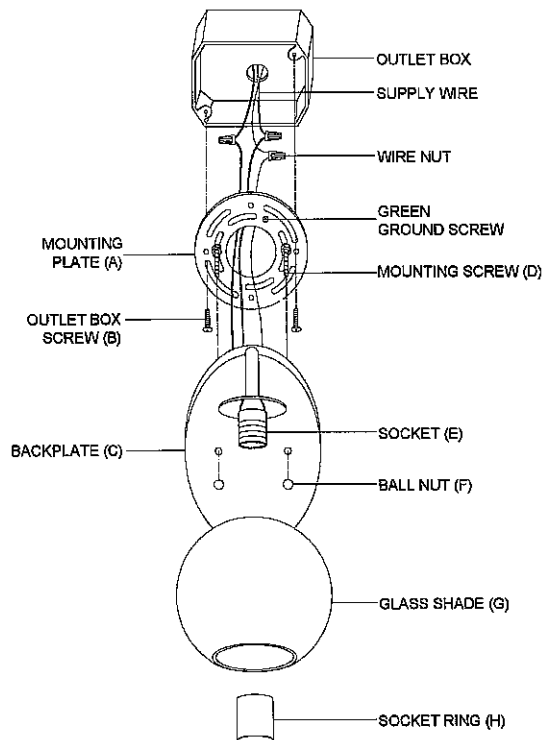


Fig.2

FIXTURE WIRES BLACK OR SMOOTH  HOUSE WIRES BLACK (HOT)	FIXTURE WIRES WHITE OR RIBBED  HOUSE WIRES WHITE (NEUTRAL)	FIXTURE WIRES GREEN OR BARE COPPER (GROUND)  HOUSE WIRES GREEN OR BARE COPPER (GROUND)
--	---	---

