

# BRIZO®

## RAINCAN SHOWER HEAD

### ■ Single-Function Round Raincan Shower Head

**FEATURES:**

- Touch-Clean® Spray Holes

**STANDARD SPECIFICATIONS:**

- Max. flow rate 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (81398-▲-2.5)
- Max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (81398-▲)
- Single function shower head
- Standard 1/2" pipe fittings. Wrench flats for tightening.
- Solid fabricated brass shower head
- Shower head is intended for overhead raincan orientation. Ball connector rotates and pivots.



**WARRANTY**

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.brizo.com](http://www.brizo.com) for the complete details of our limited warranty.



**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to 81398-▲ only

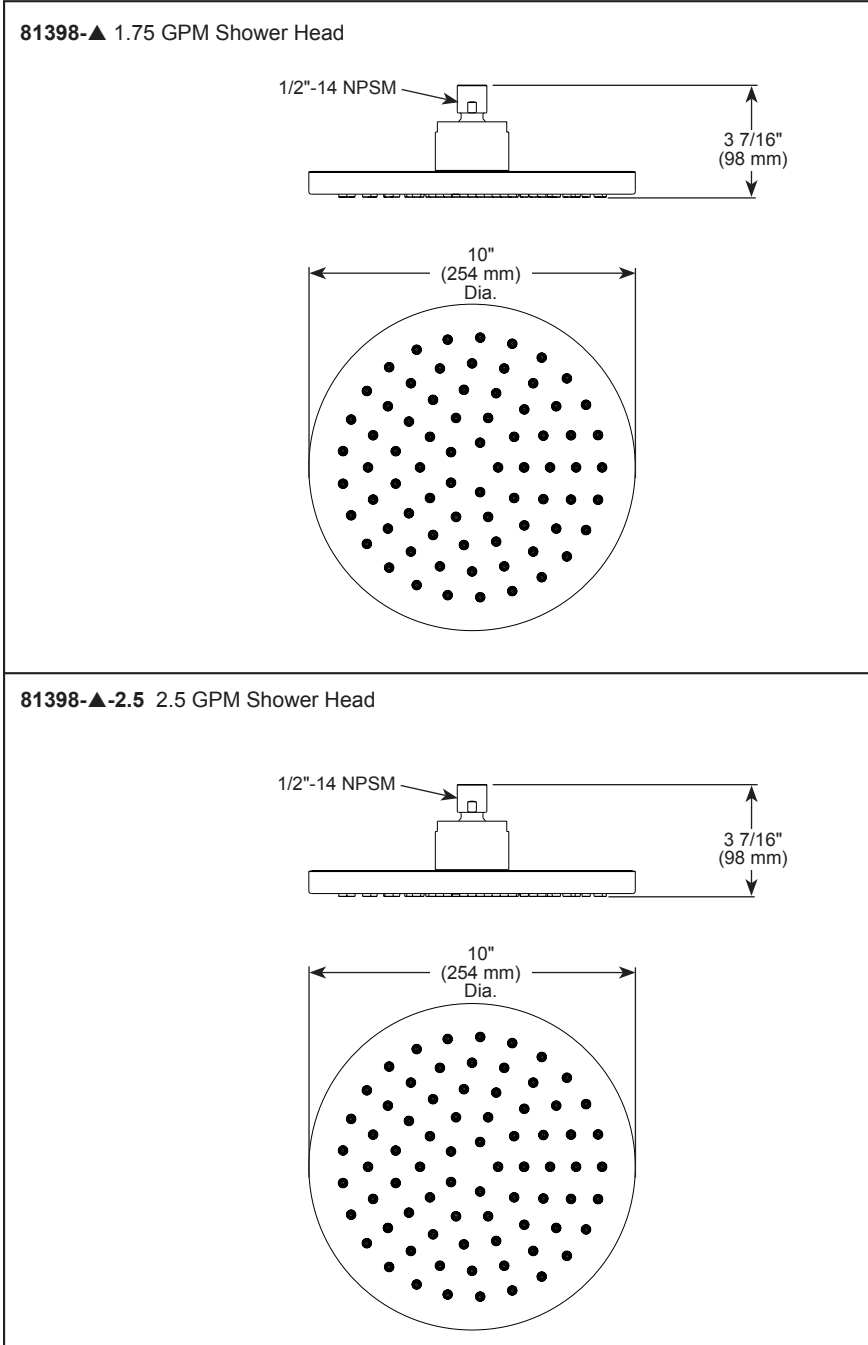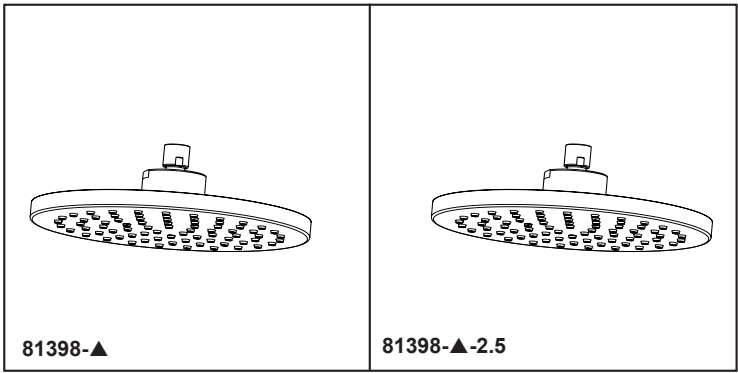

▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.brizo.com](http://www.brizo.com) for finish options and product availability.