

DIGITAL INSTANT HOT WATER TANK

HWT300
HWT300-F3000S

FEATURES:

- Digital instant hot water tank dispenses 205°F filtered water
- Available tank only (HWT300) or tank with F3000S filtration system (HWT300-F3000S)
- For use with InSinkErator instant hot water dispensers and filtration systems
- Touch-panel digital interface; modern design
- Adjustable thermostat from 190°F - 210°F
- Precise temperature control +/- 0.9°F
- Tool-free tank connections and dry start protection
- Sound proofing for ultra-quiet performance
- Rapid recovery electrical power
- NSF 58 certified for RO compatibility
- Unit not for commercial/industrial use

MATERIAL:

- 100% welded/brazed, 316L premium 2/3 gallon stainless steel tank
- Meets UL flammability specifications

WARRANTY:

We Come To You® In-Home Limited Warranty:

Tank 4-years

Filtration System 1-year (excluding replaceable filter cartridge)

Covers parts and labor.


The complete InSinkErator warranty is included in the Care & Use booklet with each unit.

CERTIFICATIONS:

NSF/ANSI 58 certified for RO compatibility
NSF/ANSI 42/53 • NSF/ANSI 372 • NSF/ANSI 401
ASSE 1023 • UPC • cULus Listed
ISO 9001 Quality System Certified



Supply Connection	1/4" (0.64 cm) Compression and/or push fitting
Required Sink Hole Diameter	1-3/8" (35 mm) Standard Sink Hole
Required Supply Pressure	25-80 psi (172-550 kPa or 1.7-5.5 bar)
Backsplash Clearance for Installation	Minimum 2" (5.08 cm) required from sink hole center to backsplash
Counter Thickness	Maximum of 3" (7.62 cm)
Shipping Weight	4.32 lb (1.96 kg)

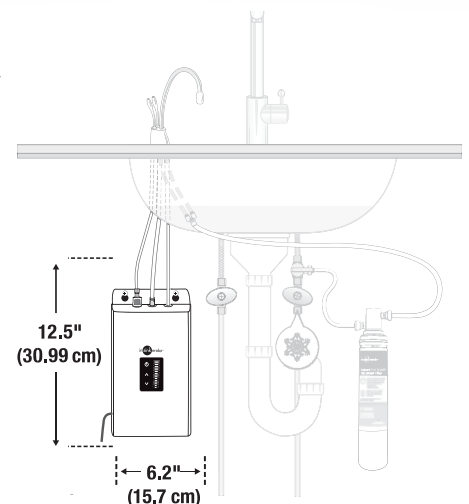

USA: 1.800.558.5700 www.insinkerator.com
CA: 1.800.561.1700 www.insinkerator.ca

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

®/TM © 2023 InSinkErator. All rights reserved.