







ASSEMBLY INSTRUCTIONS

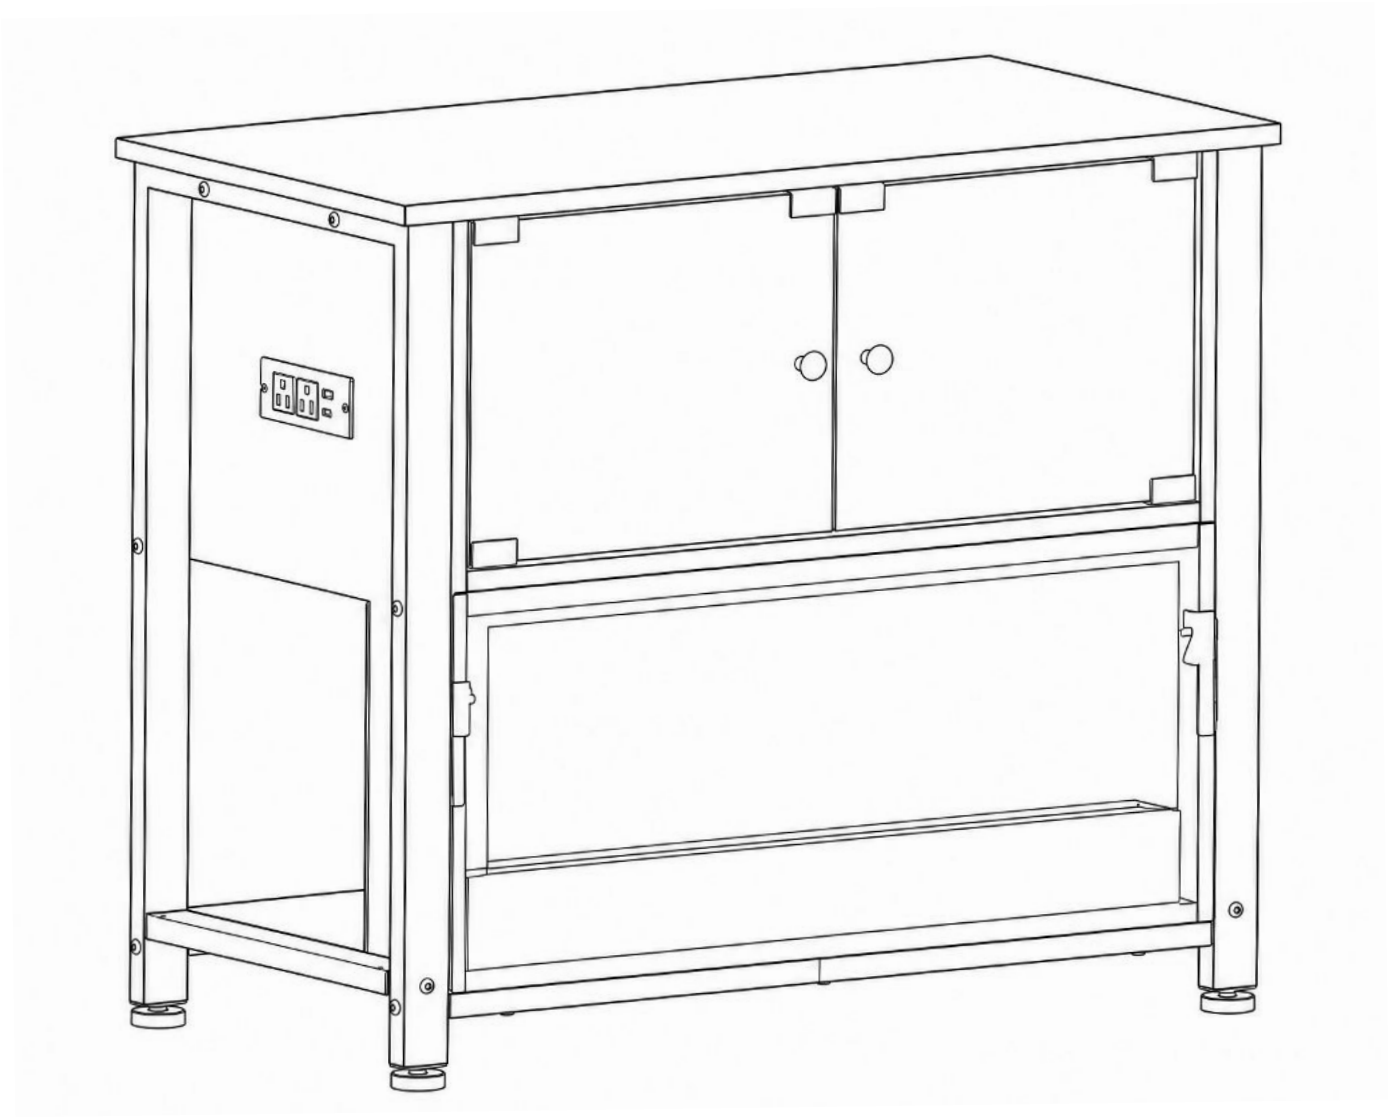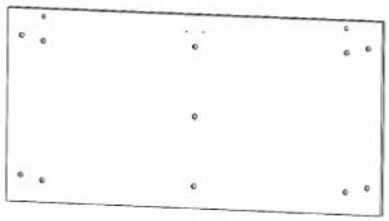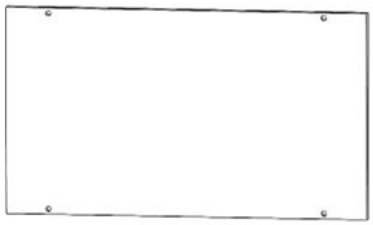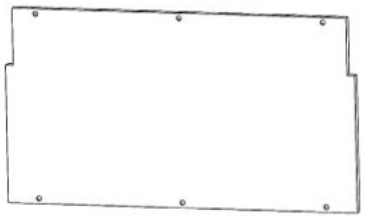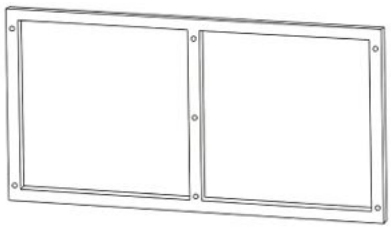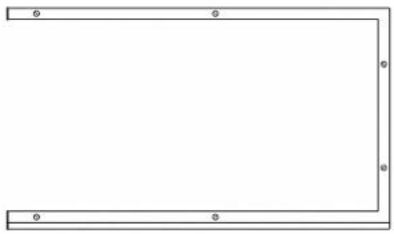


Installation requires **TWO PEOPLE**.


①  X1	②  X1	③  X1
④  X1	⑤  X1	⑥  X1
⑦  X1		

AX1 	BX2 	CX2 
DX2 	D1X2 	

① X25




② X12



③ X15



④ X2




⑤ X1



⑥ X1



6-1 X1



⑦ X1



⑧ X2




⑨ X4



⑩ X1



⑪ X1




⑫ X2




⑬ X1



⑭ X4



⑮ X2



⑯ X12



⑰ X12



⑱ X4



⑲ X2




⑳ X2




㉑ X1




㉒ X1




㉓ X1

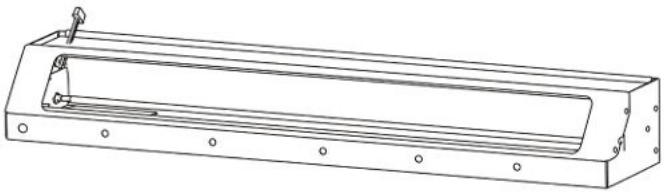


㉔ X2




㉕ X1




㉖ X1




1

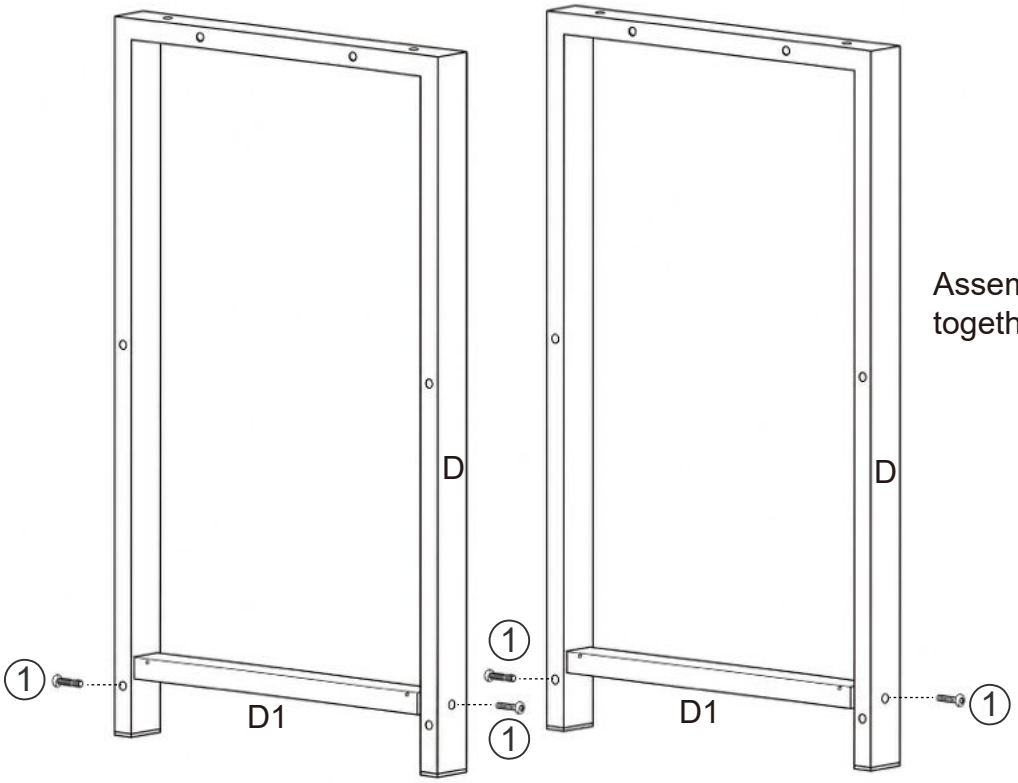


Assemble 2 sets of D and D1 together using 4 pieces of ①.




2

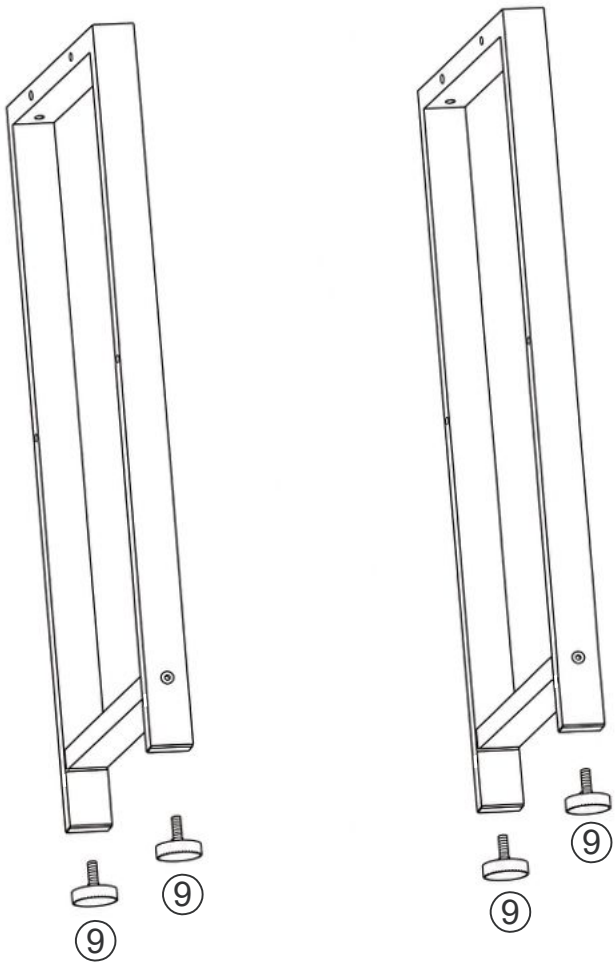





3

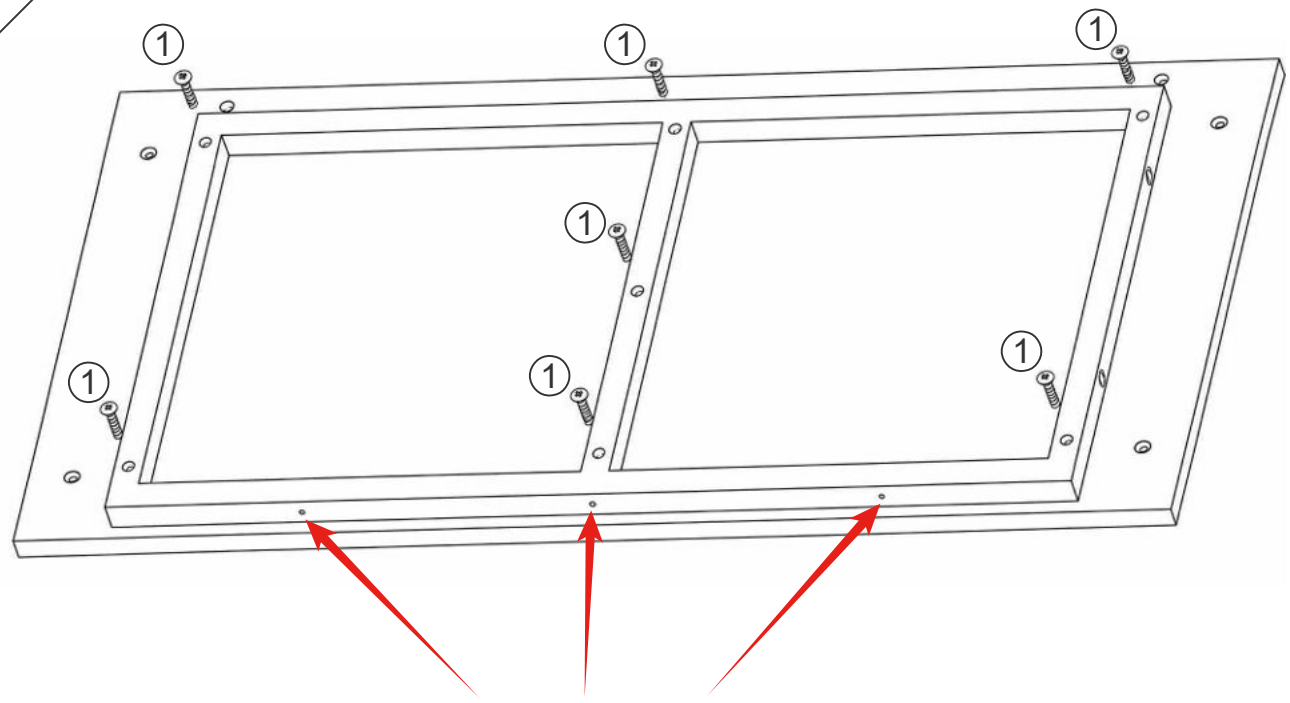



Note the orientation of the three small holes at the bottom of A.



4

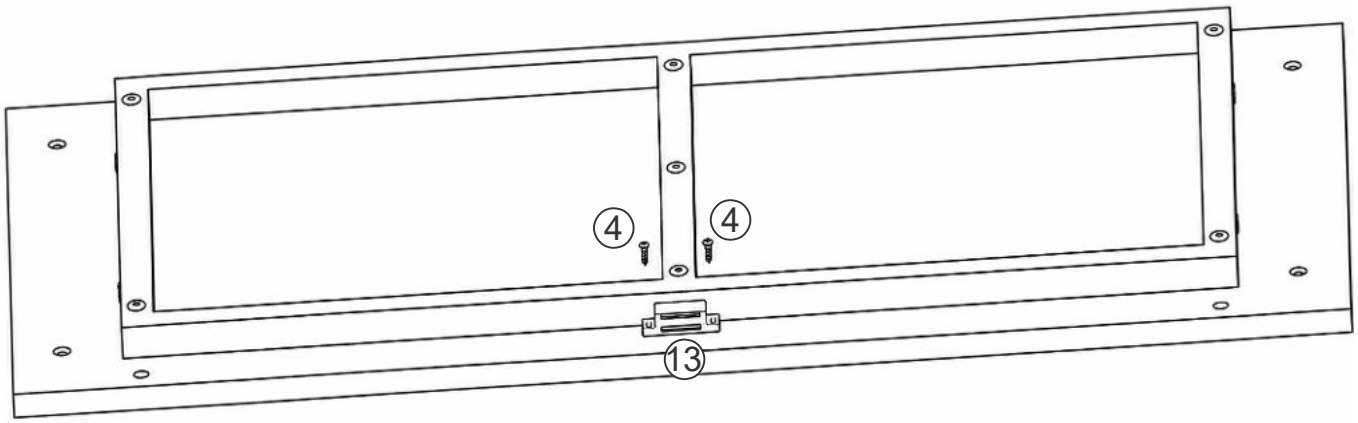








5

Align the two assembled frames from Step 2 with the holes on 4 and 5 respectively, and attach them to the assembly from Step 4. Secure the left and right sides using 2 pieces of ① and 2 pieces of ② respectively. (Note that the holes here need to face outward.)

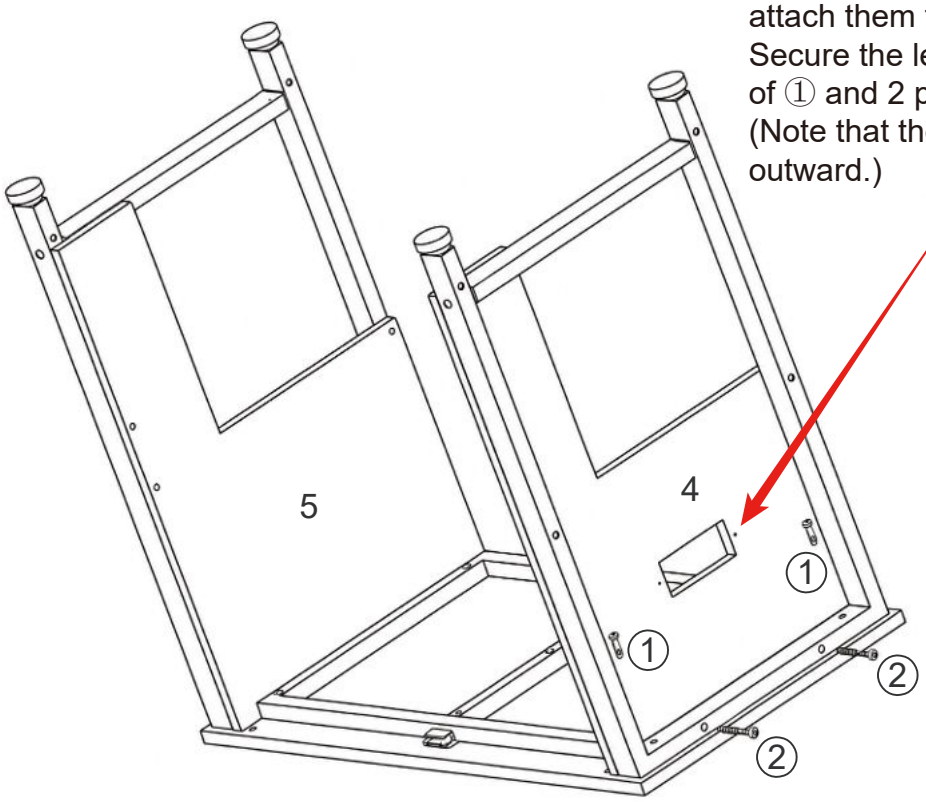








6


Note the orientation of the holes here.

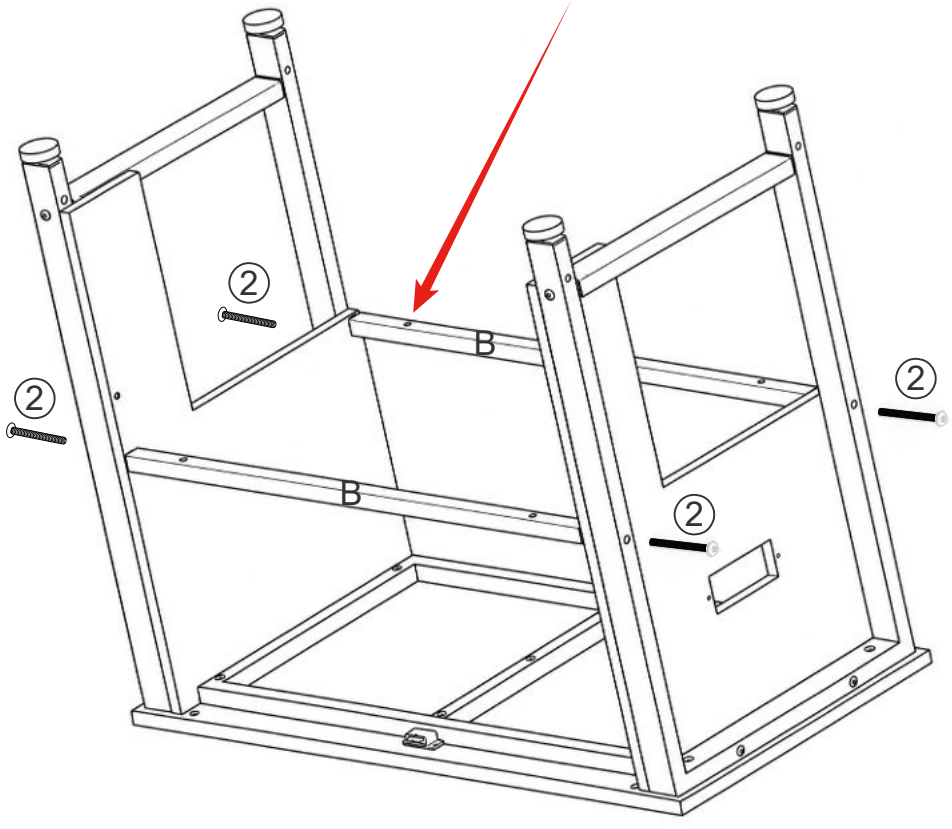





7

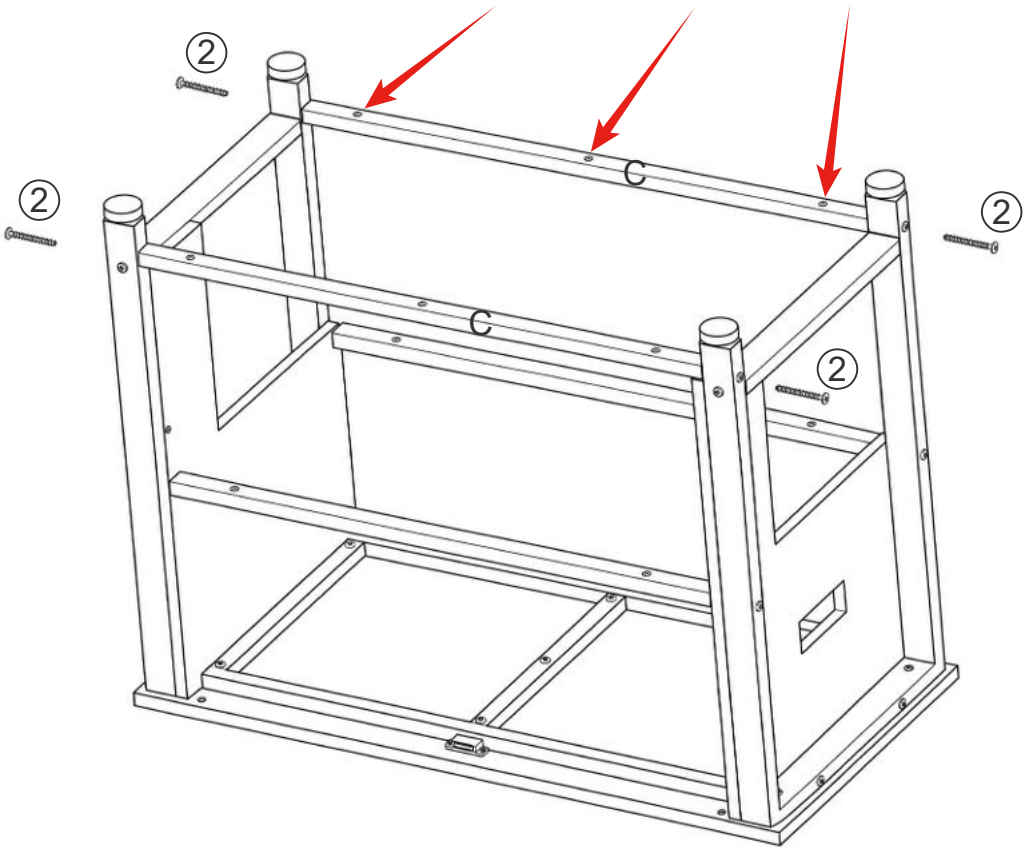





8

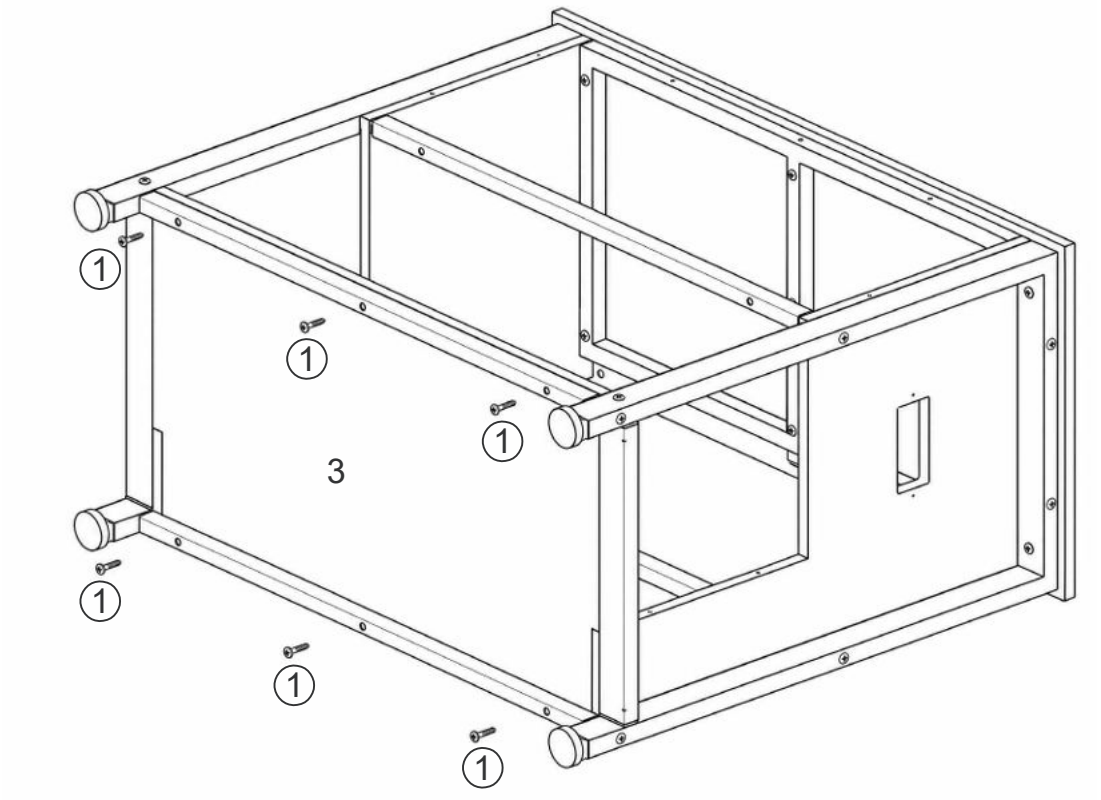





9

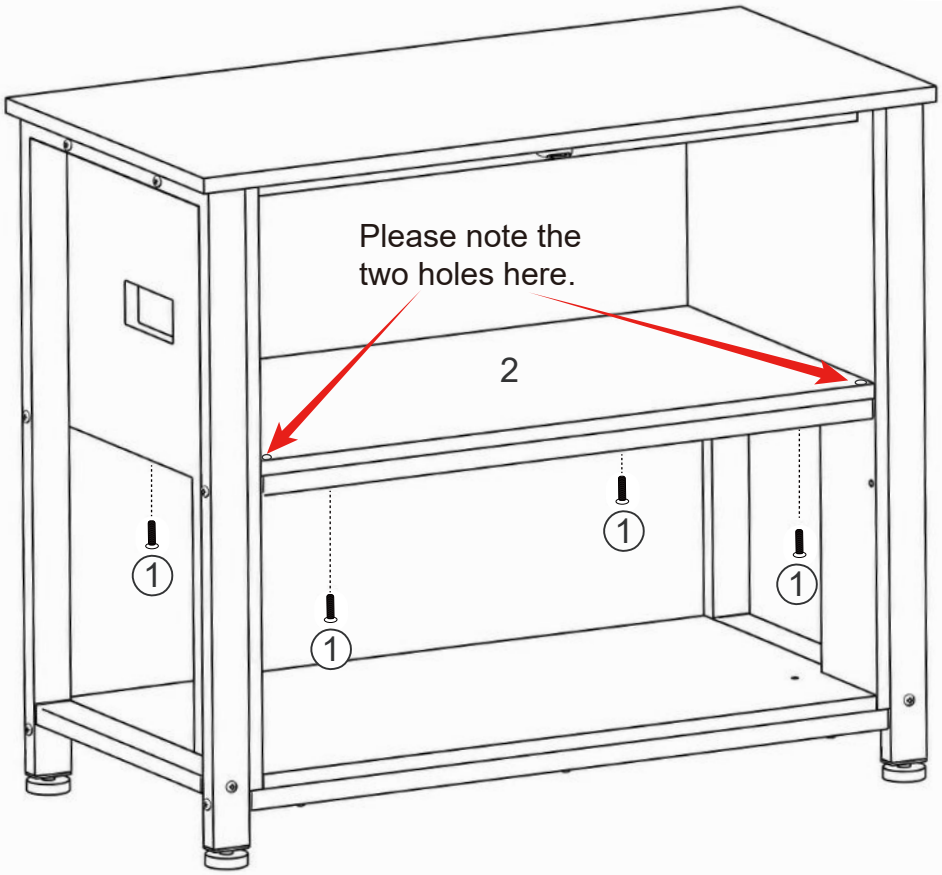




10

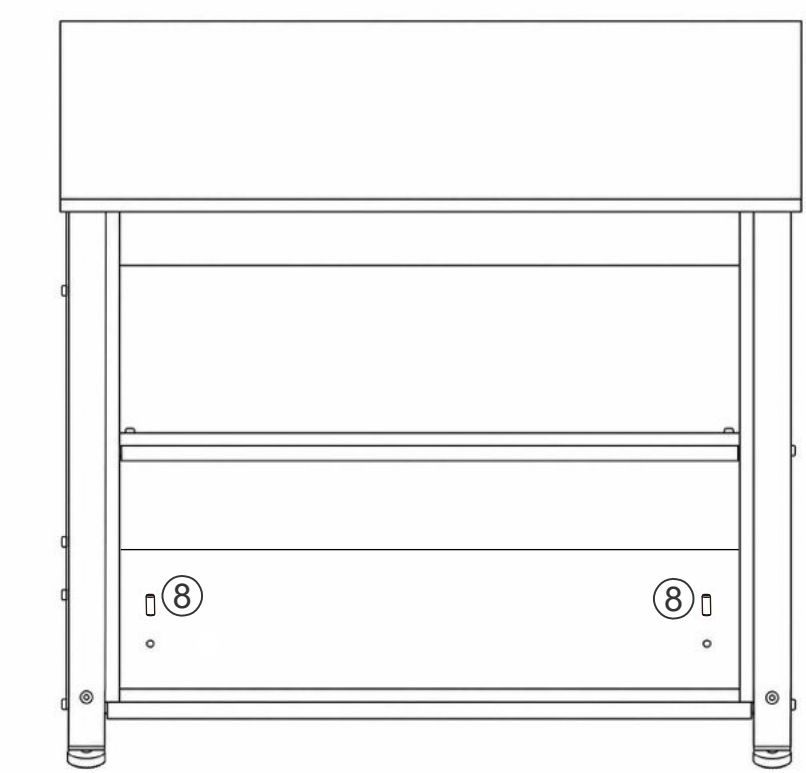





11

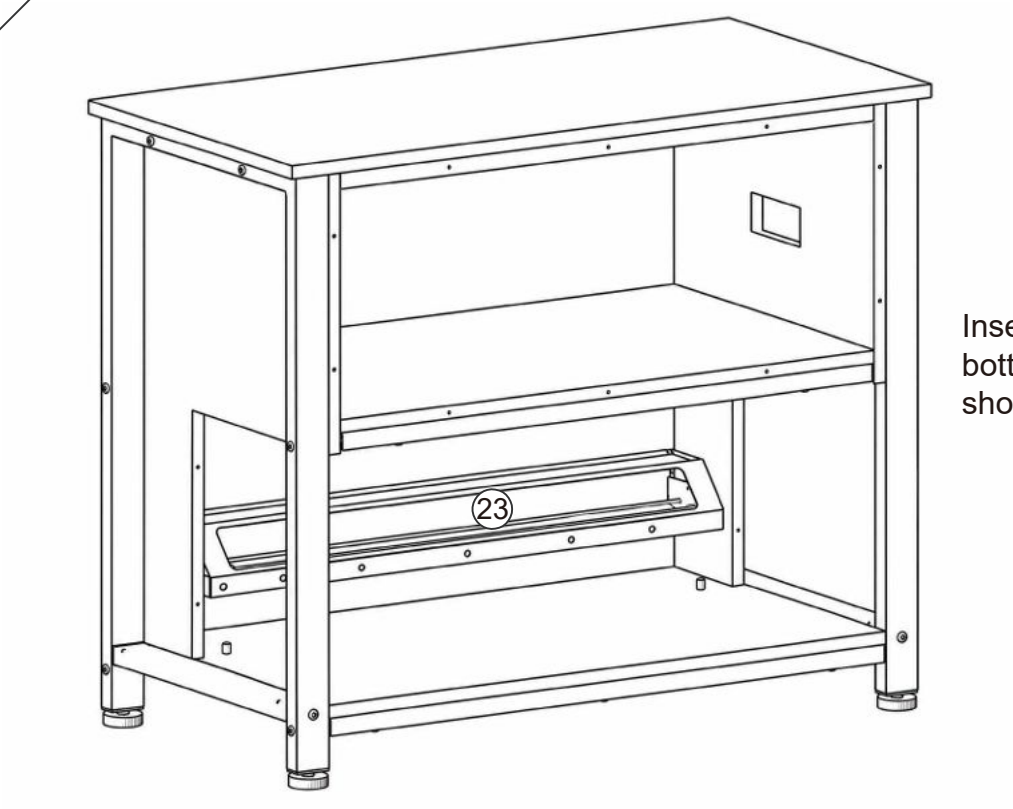


Insert ㉓ into ⑧ through the bottom holes in the direction shown in the figure.

12

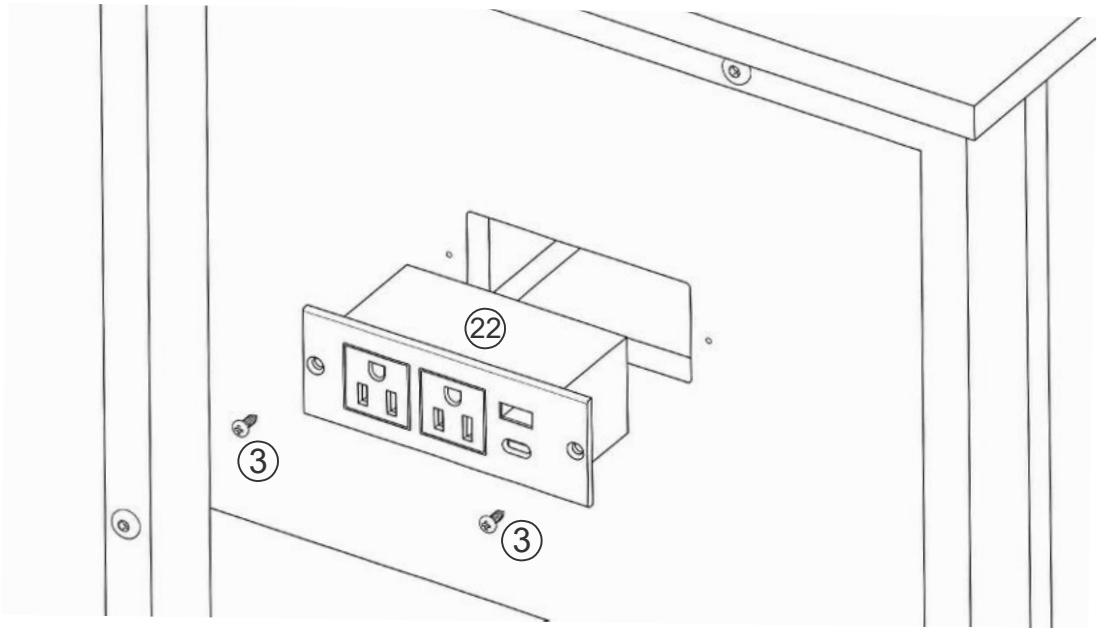



13

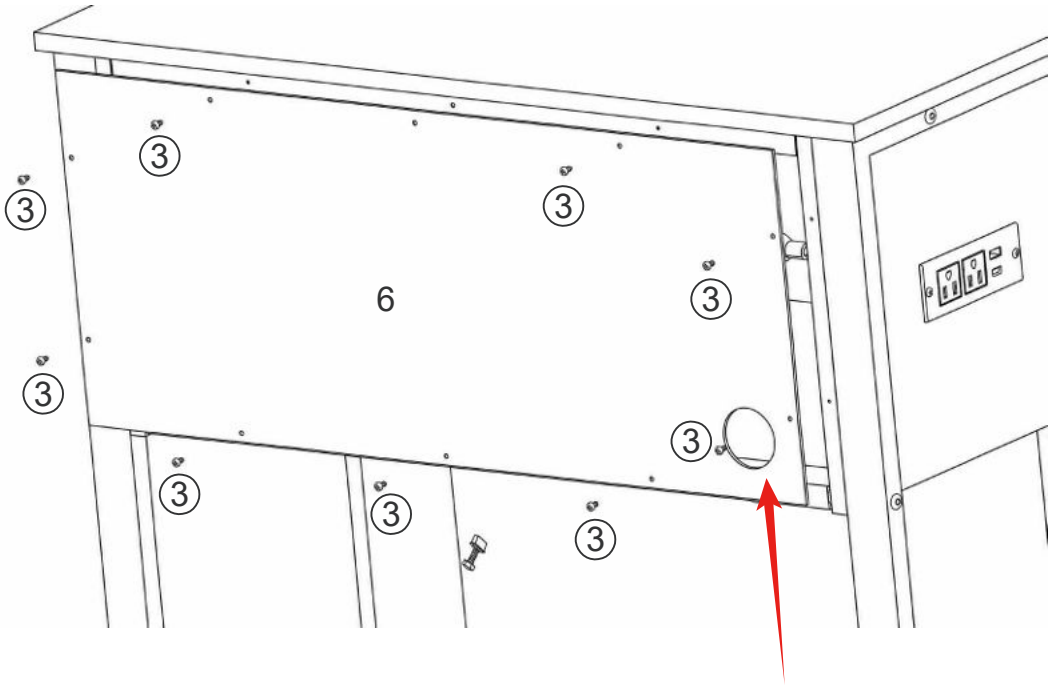


The large round hole is located at the bottom right corner.

3 x9



14

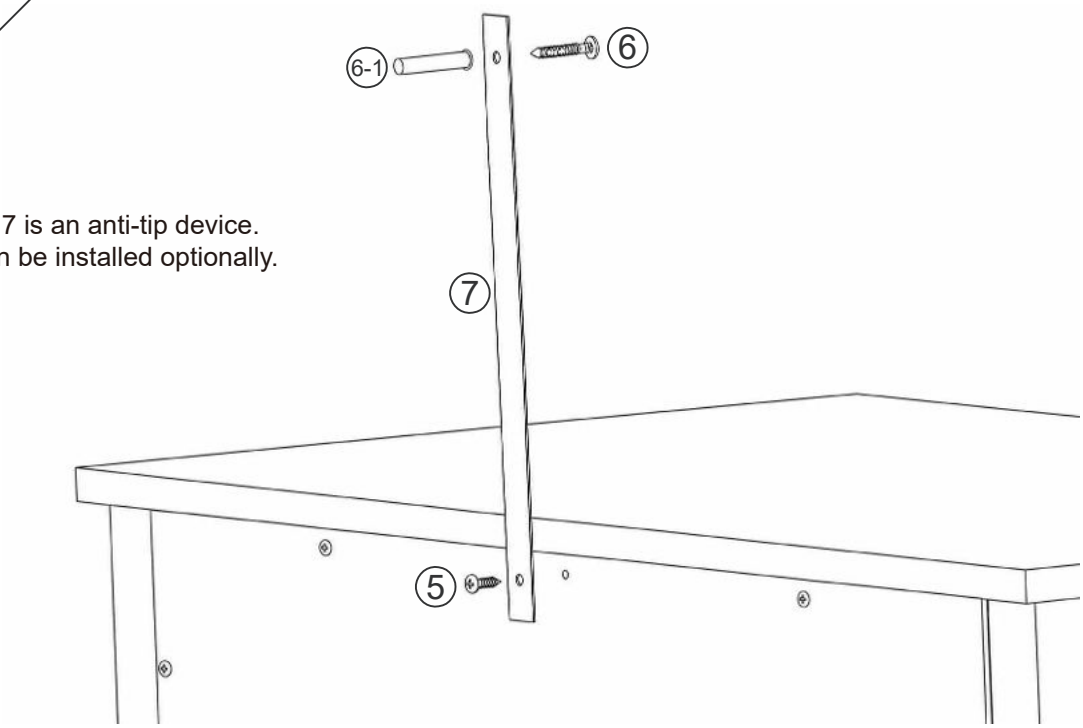

Part 7 is an anti-tip device.
It can be installed optionally.


6 x1



6-1 x1




7 x1




5 x1





15

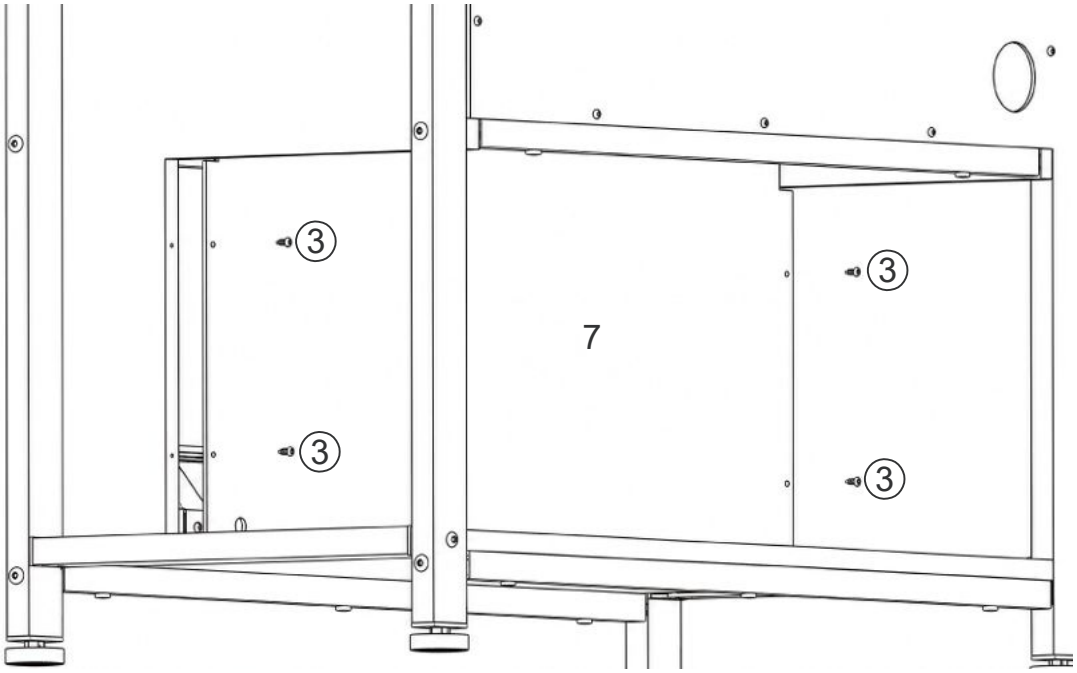




16

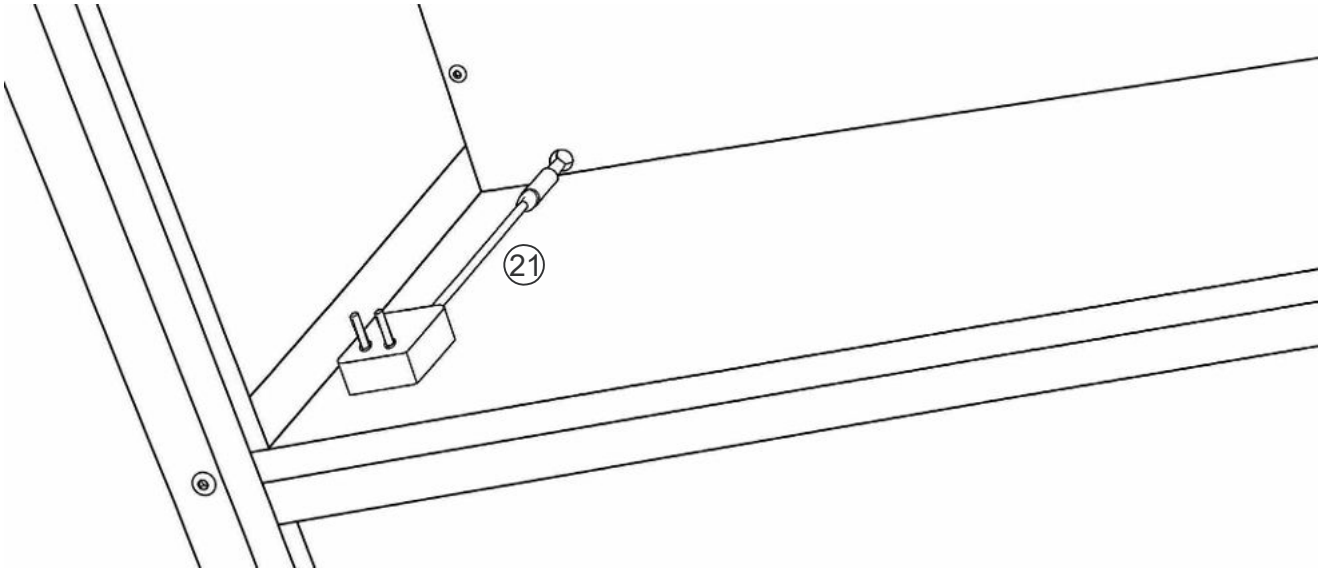



17

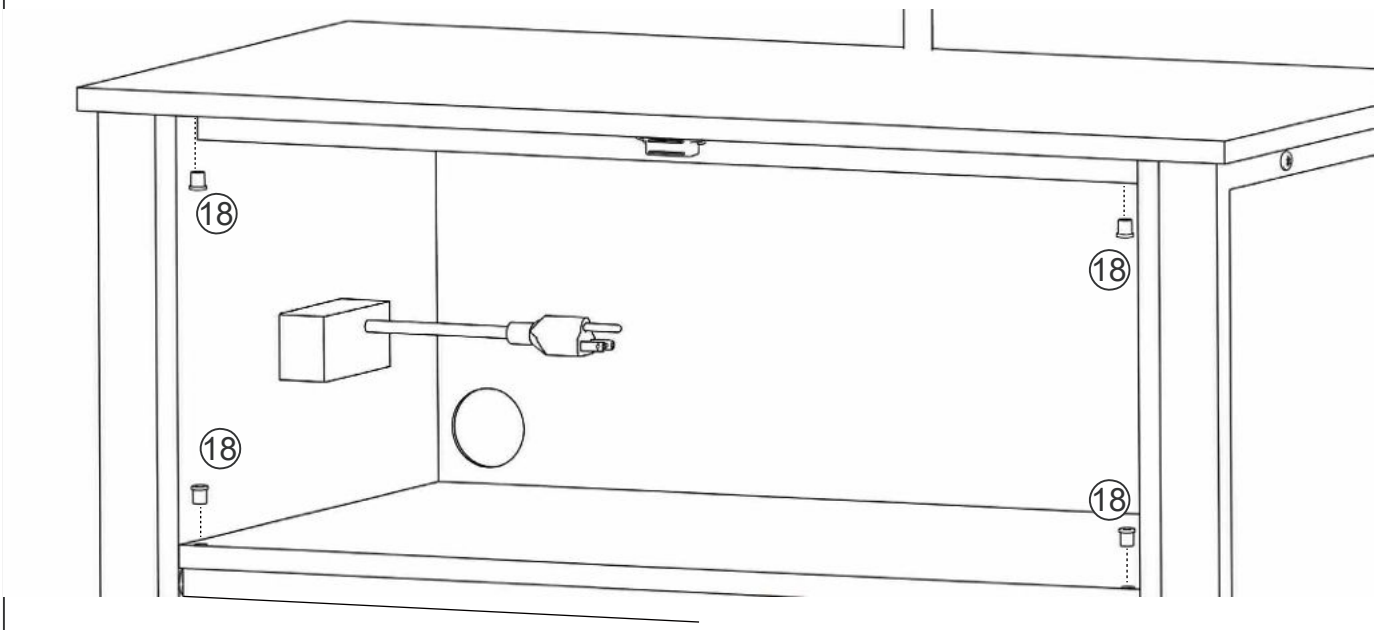


⑱ x4




18

On each of the two ㉔, install one ⑮ at the corresponding position. At the contact points between ㉔ and ⑮, place one ⑰ each, then secure them together using two ⑯ each.
(Note: Ensure the positions of all holes are as shown in the diagram.)

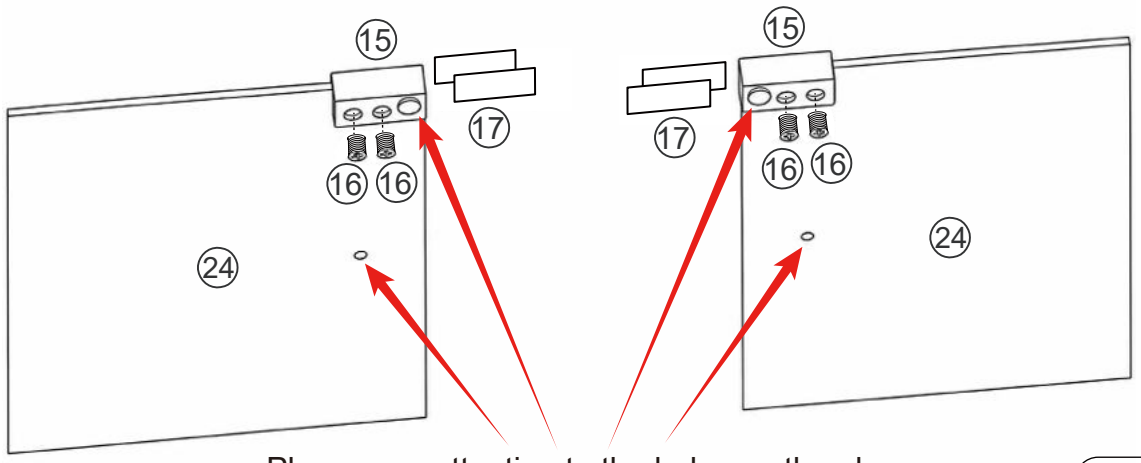

Please pay attention to the holes on the glass.

⑮ x2




⑯ x4




⑰ x4




19

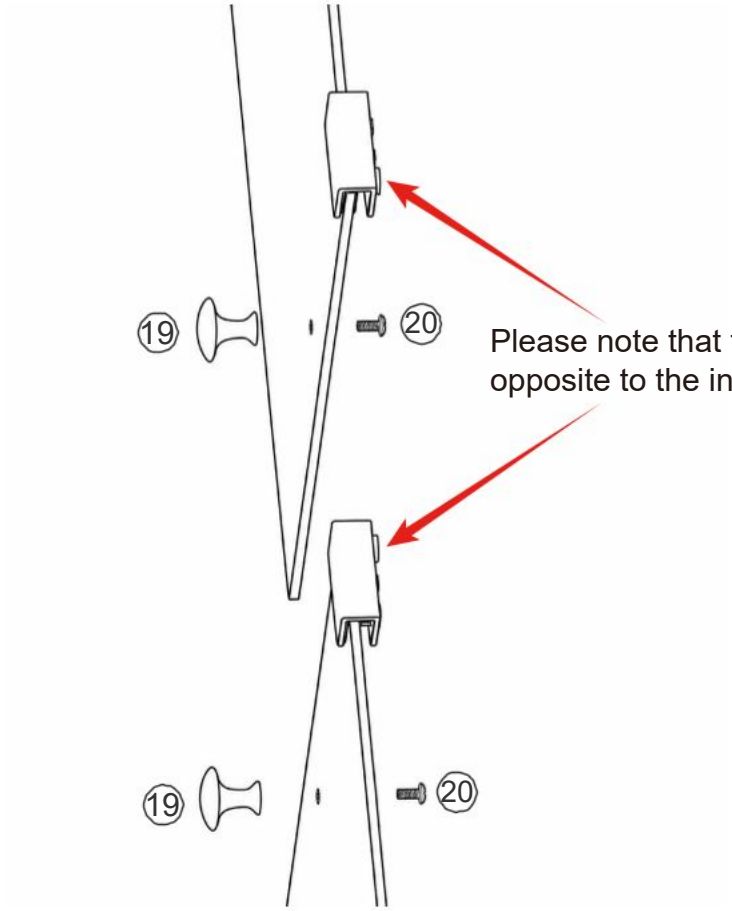


Please note that the protruding part is oriented opposite to the installation direction of part 19.






20


This step requires two people. One person should hold the upper and lower parts of component 14 by hand to prevent them from falling. The other person should insert the glass into component 14, then fit the plastic spacer (component 17) into place. After that, secure it with screw (component 16).

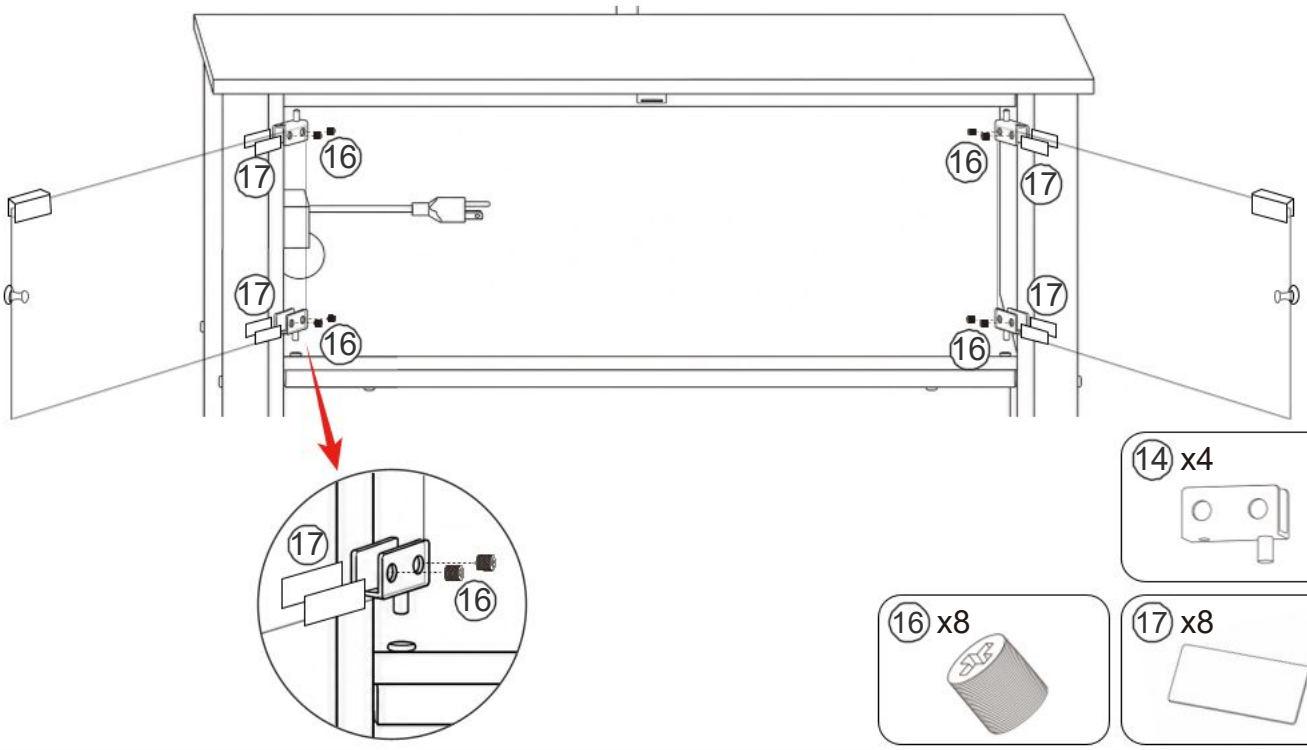

21

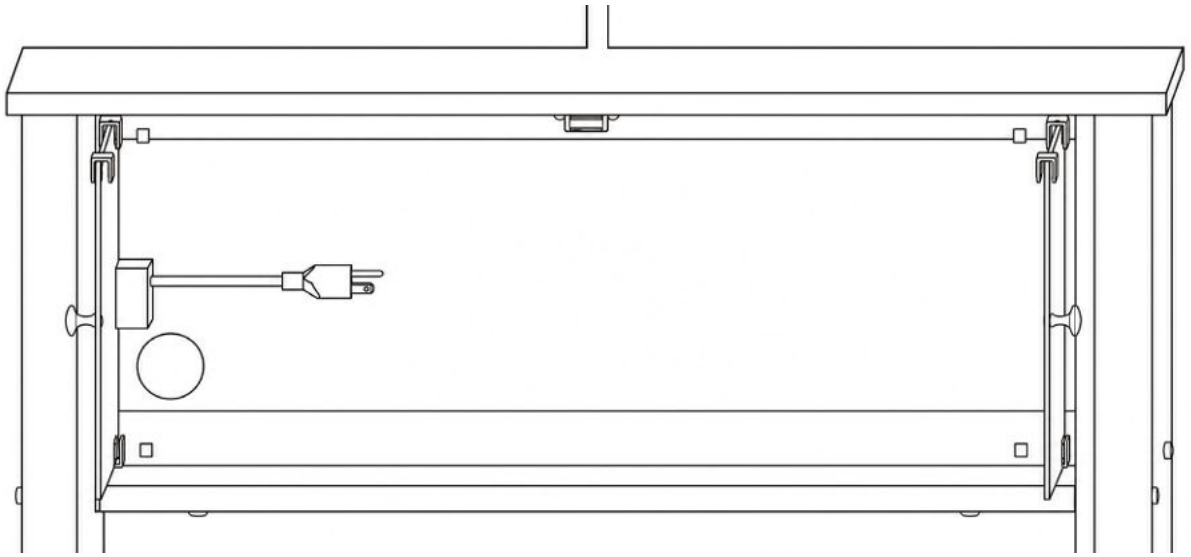


22

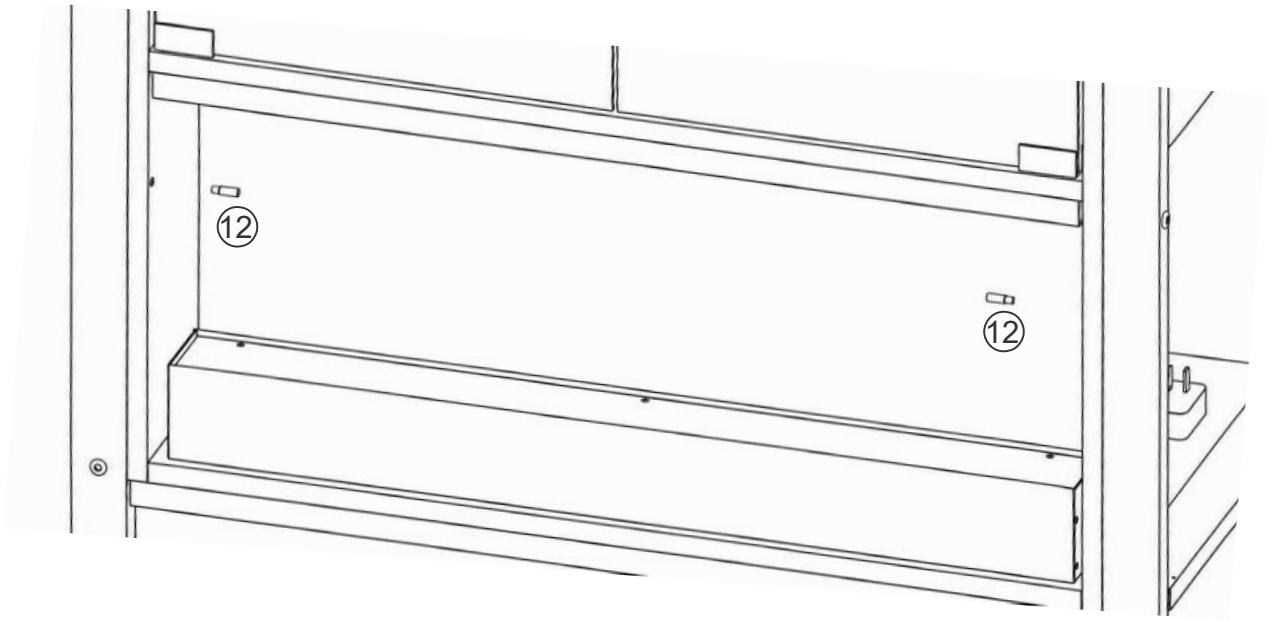

⑫ x2




23

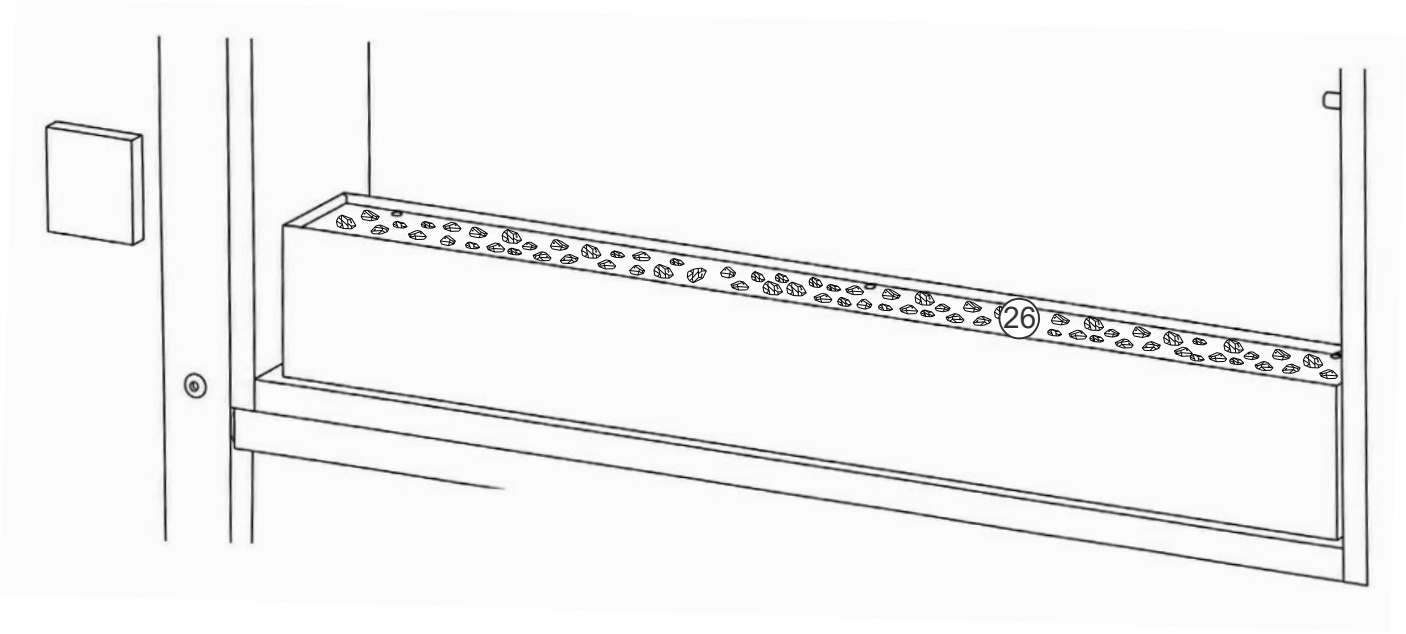

26 x1



24

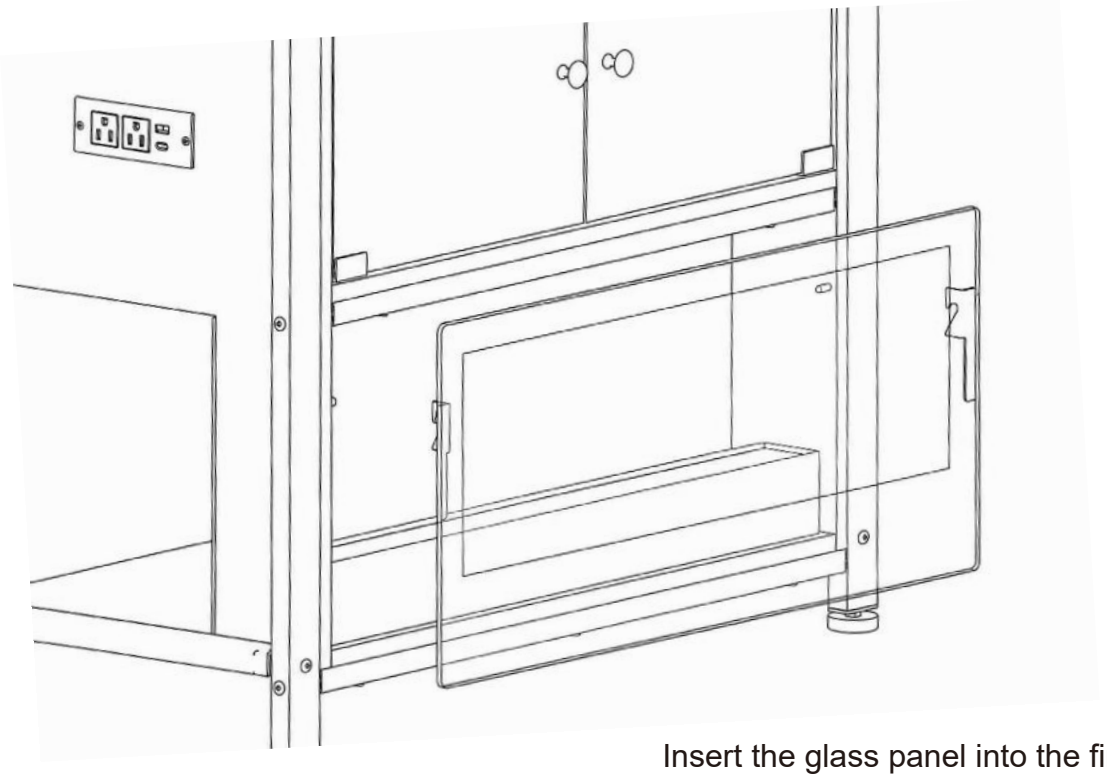

Insert the glass panel into the fireplace