

FILAMENT

CANDLE

CTC

4W & 5W



4W & 5W
WHITE

4W



5W



SPECIFICATIONS

ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	FREQUENCY	LIFETIME	WATT REPLACEMENT
CLEAR 4W	LR21572	LED4CTC/CL/27K/D	4	120V	YES	100	60Hz	10,000	40W
	LR21574	LED4CTC/CL/30K/D	4	120V	YES	100	60Hz	10,000	40W
	LR21576	LED4CTC/CL/40K/D	4	120V	YES	100	60Hz	10,000	40W
	LR21578	LED4CTC/CL/50K/D	4	120V	YES	100	60Hz	10,000	40W
CLEAR 5W	LR21592	LED5CTC/CL/27K/D	5	120V	YES	110	60Hz	10,000	60W
	LR21594	LED5CTC/CL/30K/D	5	120V	YES	110	60Hz	10,000	60W
	LR21598	LED5CTC/CL/50K/D	5	120V	YES	110	60Hz	10,000	60W
WHITE	LR21552	LED4CTC/W/27K/D	4	120V	YES	100	60Hz	10,000	40W
	LR21562	LED5CTC/W/27K/D	5	120V	YES	110	60Hz	10,000	60W

PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	CASE	COST/YR	BASE TYPE	FINISH
LR21572	2700K	WARM WHITE	400	330°	80	30	\$ 0.48	E12	CLEAR
LR21574	3000K	SOFT WHITE	400	330°	80	30	\$ 0.48	E12	CLEAR
LR21576	4000K	COOL WHITE	400	330°	80	30	\$ 0.48	E12	CLEAR
LR21578	5000K	BRIGHT WHITE	400	330°	80	30	\$ 0.48	E12	CLEAR
LR21592	2700K	WARM WHITE	550	330°	80	30	\$ 0.60	E12	CLEAR
LR21594	3000K	SOFT WHITE	550	330°	80	30	\$ 0.60	E12	CLEAR
LR21598	5000K	BRIGHT WHITE	550	330°	80	30	\$ 0.60	E12	CLEAR
LR21552	2700K	WARM WHITE	360	330°	80	30	\$ 0.48	E12	WHITE
LR21562	2700K	WARM WHITE	450	330°	80	30	\$ 0.60	E12	WHITE

GENERAL

DIMENSIONS

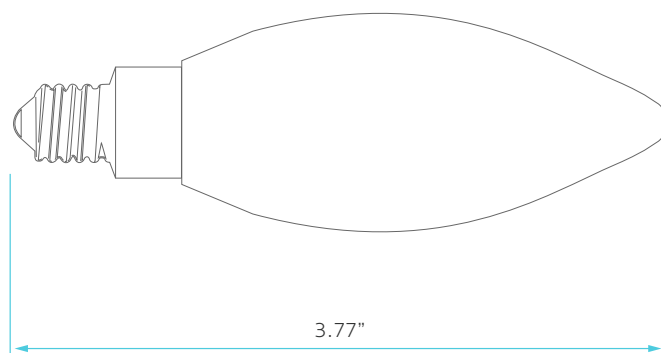

CTC