
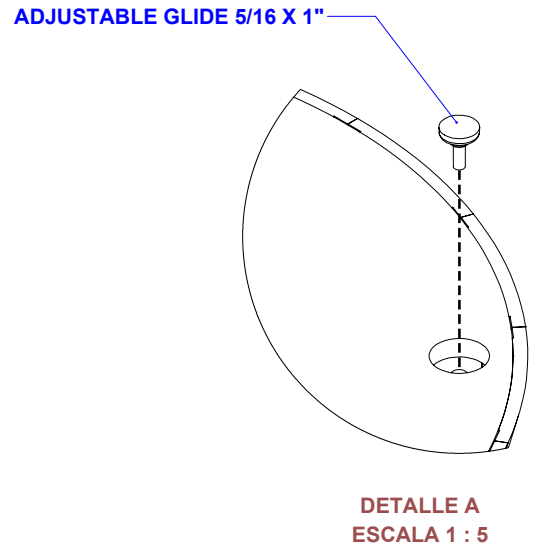


ASSEMBLY INSTRUCTIONS

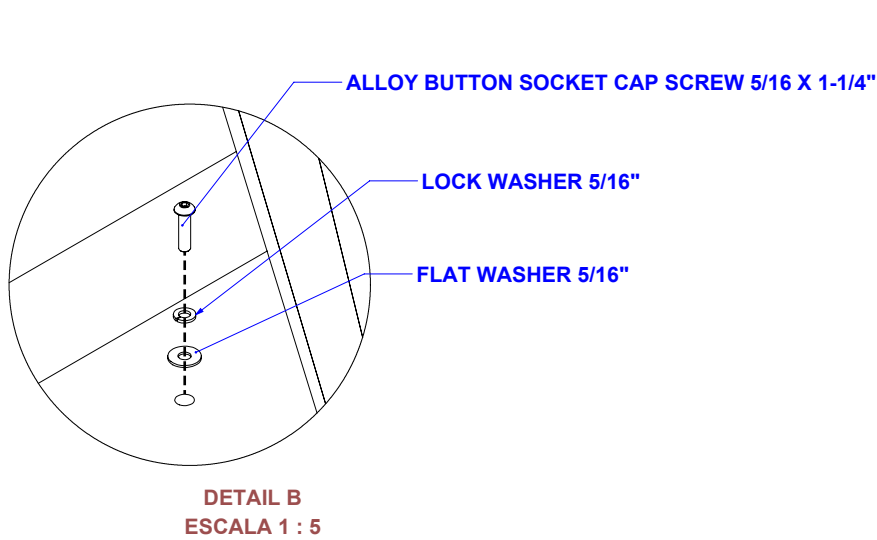

STEP 1: WORK AREA PREPARATION

PLACE THE TABLETOP AND BASE ON A FLAT SURFACE.

STEP 2 – ATTACH BASE


ALIGN THE 5/16" X 1-1/4" SCREW WITH ITS WASHERS TO THE HOLE, TIGHTEN USING THE 3/16" ALLEN KEY, AND REPEAT THE PROCESS FOR THE REMAINING HOLES.

STEP 3 – FLIP TABLE

WITH ASSISTANCE, ROTATE TABLE TO UPRIGHT POSITION. ADJUST GLIDES TO LEVEL.

STEP 4 – VERIFY

CHECK ALL SCREWS ARE TIGHT. ENSURE TABLE IS STABLE AND LEVEL.

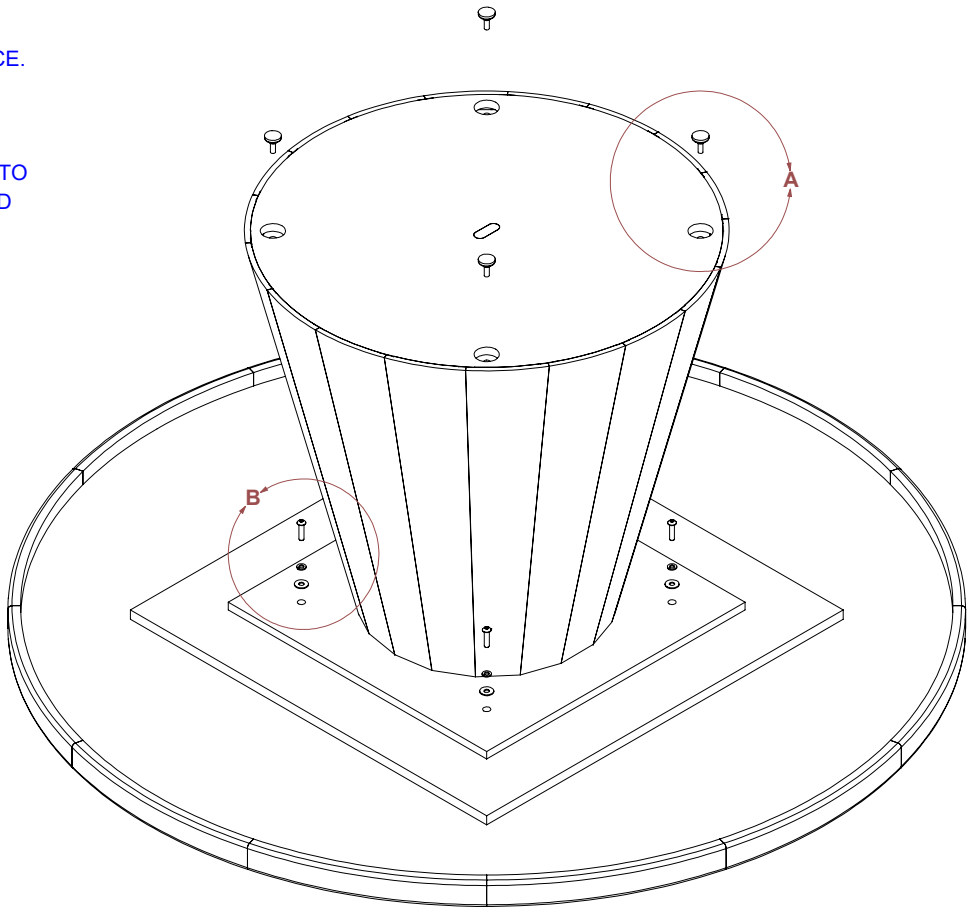

DESCRIPTION	#
ALLOY BUTTON SOCKET CAP SCREW 5/16 X 1-1/4"	4
FLAT WASHER 5/16	4
LOCK WASHER 5/16	4
ADJUSTABLE GLIDE 5/16 X 1"	4
HEX KEY 3/16	1

I-RNDTP-E003