


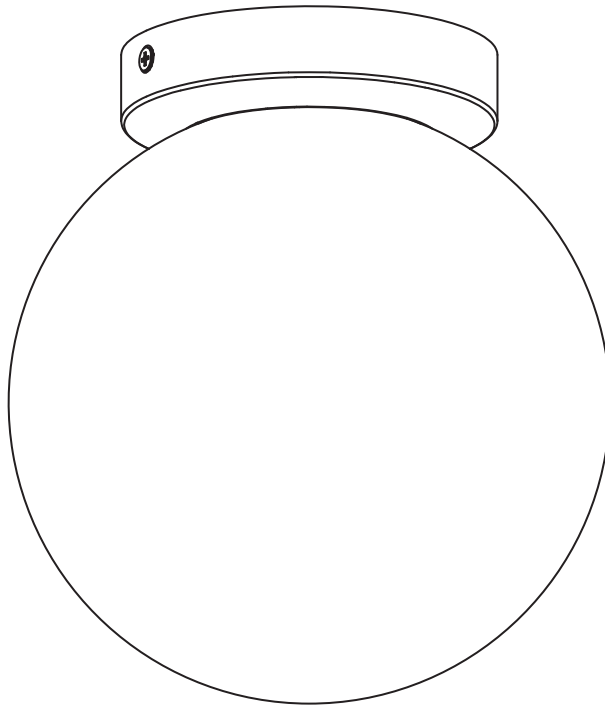

1-LIGHT FLUSH MOUNT

IMPORTANT SAFETY INSTRUCTIONS

Read and Save:

1. To reduce the chance of fire or electrical shock: Do not install non-factory wiring or any other electrical components. Altering or modifying the lamp in any way will render the lamp unsafe.
2. Keep curtains, shades, wall hangings and all other fabrics and objects away from the lamp canopy, lamp shade and light bulb. Unit is not designed to support additional weight. Do not hang objects from the lamp or any lamp part.
3. Unit is to be ceiling mounted only.
4. Before starting the installation, disconnect the power by turning off the circuit breaker or removing the appropriate fuse at the fuse box. Turning off the power at the light switch is **not** sufficient to prevent electrical shock.
5. This unit is suitable for installation in indoor location only.
6. **Electrical Connections:** All electrical connections must be in accordance with local codes, ordinances and the National Electric Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified, licensed, electrician.
7. This unit is to be mounted to an electrical junction box (outlet box) directly supported by the building structure.
8. **Tools and Materials Required:** (Not Included) Flathead screwdriver, wire cutters, ladder, pliers, U.L./CSA listed electrical tape.

LIGHT BULB REPLACEMENT

1. Uses 60 Watt Max.Type A bulb or LED equivalent.
2. **DO NOT EXCEED RECOMMENDED WATTAGE.**
3. Turn off the unit and allow the bulb to cool before touching.


CLEANING AND MAINTENANCE

1. Clean using a mild cleaning solution and a soft cloth.
2. Never use a rough cloth or chemical cleaners containing acids, abrasives or solvents.

Installation


1 Installing the mounting plate

- Unscrew the preassembled canopy screws (C) from the fixture assembly (B) and detach the mounting bracket (A).
- Install the mounting plate (A) to the junction box (not included) with two junction box screws (AA).

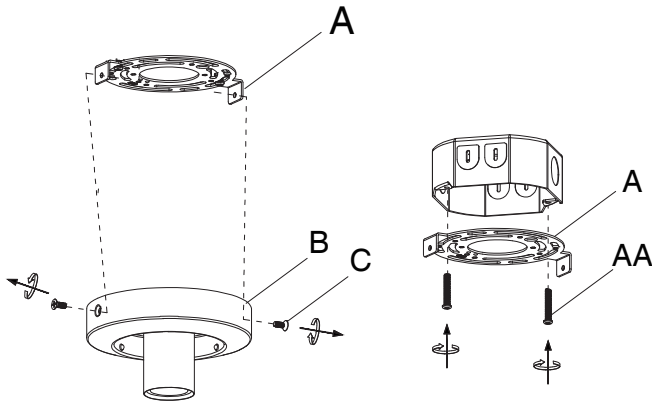


2 Making the electrical connections

- Make electrical connections to a 120V AC/60Hz circuit.
 - Connect the white wires from the fixture to the white wire of the supply circuit.
- Connect the black wires from the fixture to the black wire of the supply circuit.
- Wrap the grounding wire from the fixture around the green screw on the mounting plate (A), then connect it to the grounding conductor of the supply circuit.
- Use provided wire connectors (BB) suitable for the size, type and number of conductors. No loose strands or loose connections should be present. Secure wire connectors with U.L./CSA Listed electrical tape (not included).
- Tuck all wires back into the outlet box.

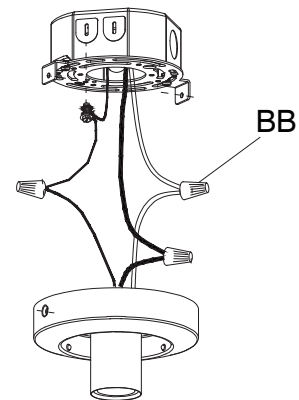

3 Installing the fixture assembly

- Place the fixture assembly (B) against the mounting surface, align the holes of mounting plate (A) with the canopy holes on the fixture assembly (B) and then secure with the previously removed canopy screws (C).

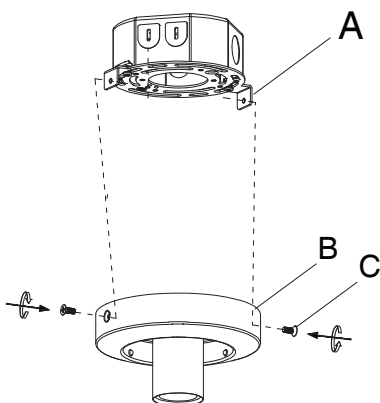

4 Installing the bulb and shade

- Use the standard E26 type A bulbs up to 60 watts or LED equivalent (not included).
- Align the slots on the shades (D) with the studs on the fixture assembly (B), insert and twist the shade (D) clockwise to the fixture assembly (B) until secure.

