

4" Square Deep Regressed LED 15W Open Plenum



Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION


4" Square Deep Regressed LED - Elegant Design Without Glare
Commercial Grade Quality Built To Last

FEATURES & BENEFITS

- High Lumen Output & CRI 90+
- Type IC, Air-Tight & Wet - No Housing Required
- 3 1/2" Deep - Install Where Ceiling Space Is Limited
- Armored Cable & Metal Connectors - Open Plenum Rated
- Driver Inside Connection Box with Romex Quick Connectors and Knock Outs - Fast Installation & No Junction Box Needed

DIMENSIONS ID 4" OD 4 7/8" Sq Cut Out 4" to 4 1/4"

Ceiling Clearance Required: 3"

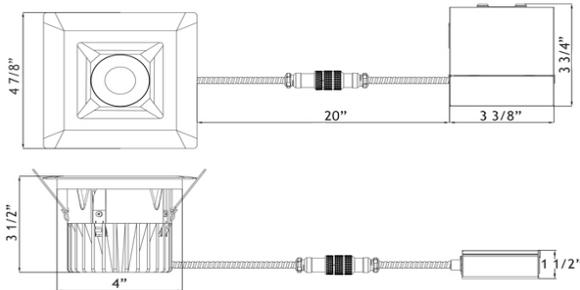

120V TRIAC Dimmable Driver Included



Optional 120V-347V Driver 0-10V Dimmable



Order Separately as
Cat # LLL-LD1535TR

ORDERING GUIDE: Example LD4S-30K-4R-WR-WT

LD4S -	CCT - xxK	Reflector-Trim - 4S-xx-xx
2700K	27K	WR-WT
3000K	30K	SR-WT
4000K	40K	BR-BT
Dim to Warm 3000K to 2000K	32K	SR-BT

Project: _____

Location: _____

Cat #: _____ Qty: _____

Notes: _____

SPECIFICATION

Applications	Recessed Ceiling Mount			
Energy Used	15 W			
Color Temperature (K)	2700	3000	4000	DTW 3000-2000
Light Output (lm)	1100	1200	1300	900
Halogen Equivalent	110 W			
Beam Angle	25°			
CRI	90 +			
Default Driver Input	120V AC	Triac Dimmable		
Optional Driver Input	120V-347V AC	0-10V Dimmable		
Power Factor	0.98			
Approved Location	Insulated Ceilings, Open Plenum, Wet			
IP Rating	IP 54			
Air Tight	Yes			
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)			
Projected Life	70% Light Output at 50,000 Hours			
Certification	cULus, Energy Star (except DTW), T24			
Warranty	10 Year on Residential 5 Year on Commercial Applications			

Stock Trims




White Reflector	Silver Reflector	Black Reflector	Silver Reflector
White Trim	White Trim	Black Trim	Black Trim
4S-WR-WT	4S-SR-WT	4S-BR-BT	4S-SR-BT

Other Reflector & Trim Colors Available By Custom Order

ACCESSORIES

Sold Separately

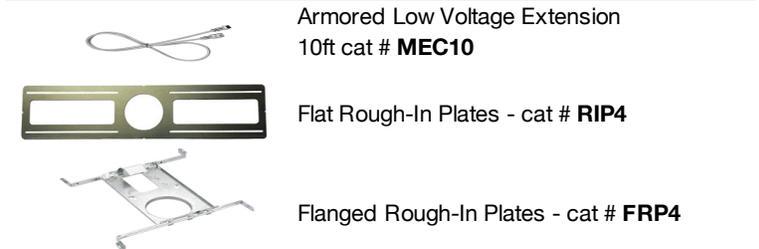

COMPLIANCE



Type IC
Air - Tight
Open Plenum