






① canopy 1PCS ②  cap nut 2PCS	③ lock nut & teeth lock washer ④  lock nut & washer & screw ⑤ bended profile 4PCS	⑥ hanging tube 1PCS	⑦  crystal lampshade 1PCS				
⑧  light fixture 1PCS	⑨  crystal ball 1PCS	 X 1PCS	 X 3PCS	 X 3PCS	 X 3PCS		
		 X 3PCS	 X 2PCS				

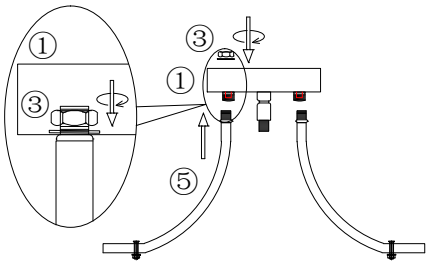





1.Remove out the lock nut & teeth lock washer③ from profile⑤, install the profile⑤ to the canopy① with lock nut & teeth lock washer③, adjust the profile⑤ to 90 degree like picture shown.

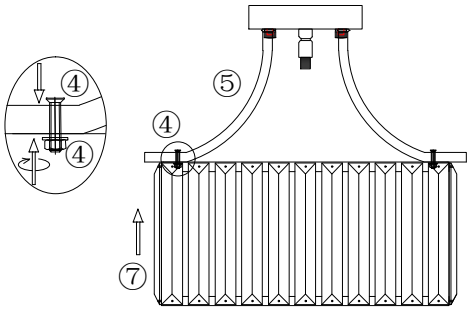


2.Remove out the lock nut & washer & screw④ from profile⑤, install the lampshade⑦ to the profile⑤ with lock nut & washer & screw④.

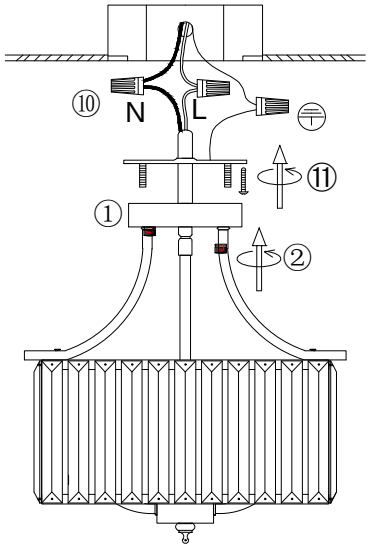

4.Install the bracket to the ceiling junction box with screw⑪.
5.Connect the wire to the home line with cap connector⑩.
6.Install the fixture to the bracket with cap nut②.

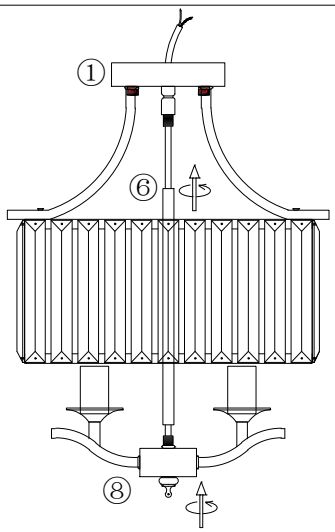

3.Let the wire of the fixture⑧ go through the hanging tube⑥ and canopy①, rotate to fasten all parts together.

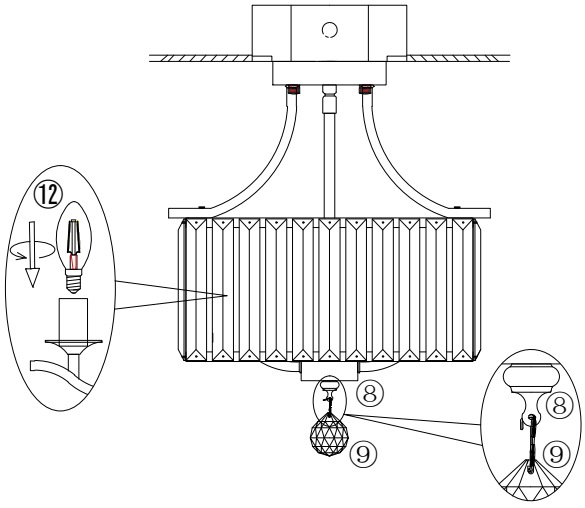

7.Hang the crystal ball⑨ to the bottom hole of the light fixture.
8.Install the bulb⑫. (bulbs are not included in the package)

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !